

Ordering information

Example: 55 series plug-in relay, 4 CO (4PDT), 12 V DC coil, lockable test button and mechanical indicator.

	5	5	.	3	.	4	.	9	.	0	1	2	.	0	A	0	B	0	C	4	D	0
Series													A: Contact material			D: Special versions						
Type													0 = Standard AgNi			0 = Standard						
1 = PCB													2 = AgCdO			1 = Wash tight (RT III)						
3 = Plug-in													5 = AgNi + Au (5 μm)			for 55.12, 55.13 and 55.14 only						
No. of poles													B: Contact circuit			6 = Rear flange mount						
2 = 2 pole, 10 A													0 = CO (nPDT)			C: Options						
3 = 3 pole, 10 A													0 = None									
4 = 4 pole, 7 A													1 = Lockable test button									
Coil version													2 = Mechanical indicator									
8 = AC (50/60 Hz)													3 = LED (AC)									
9 = DC													4 = Lockable test button+mechanical indicator									
Coil voltage													5 = Lockable test button + LED (AC)									
see coil specifications													54 = Lockable test button + LED (AC)									
													+ mechanical indicator									
													6 = Double LED (DC non-polarized)									
													7 = Lockable test button + double LED									
													(DC non-polarized)									
													74 = Lockable test button + double LED									
													(DC non-polarized)									
													+ mechanical indicator									
													8 = LED + diode									
													(DC, polarity positive to pin A1/13)									
													9 = Lockable test button + LED + diode (DC,									
													polarity positive to pin A1/13)									
													94 = Lockable test button + LED + diode (DC,									
													polarity positive to pin A1/13)									
													+ mechanical indicator									

55

Selecting features and options: only combinations in the same row are possible.

Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
55.32/34	AC-DC	0 - 2 - 5	0	0	0 - 6
	AC	0 - 2 - 5	0	2 - 3 - 4 - 5	0 - 6
	AC	0 - 2 - 5	0	54	/
	DC	0 - 2 - 5	0	2 - 4 - 6 - 7 - 8 - 9	0 - 6
	DC	0 - 2 - 5	0	74 - 94	/
55.33	AC-DC	0 - 2 - 5	0	0	0 - 6
	AC	0 - 2 - 5	0	1 - 3 - 5	0 - 6
	DC	0 - 2 - 5	0	1 - 6 - 7 - 8 - 9	0 - 6
55.12/13/14	AC-DC	0 - 2 - 5	0	0	0 - 1

Descriptions: Options and Special versions

C: Option 3, 5, 54 LED (AC)	C: Option 6, 7, 74 Double LED (DC non-polarized)	C: Option 8, 9, 94 LED + diode (DC, polarity positive to pin A1/13)	D: Special versions 6 Rear flange mount



Lockable test button and mechanical flag indicator (0040)

The dual-purpose Finder test button can be used in two ways:

Case 1) The plastic pip (located directly above the test button) remains intact. In this case, when the test button is pushed, the contacts operate. When the test button is released the contacts return to their former state.

Case 2) The plastic pip is broken-off (using an appropriate cutting tool). In this case, (in addition to the above function), when the test button is pushed and rotated, the contacts are latched in the operating state, and remain so until the test button is rotated back to its former position. In both cases ensure that the test button actuation is swift and decisive.

Technical data

Insulation

Insulation according to EN 61810-1 ed. 2	insulation rated voltage	V	400 (2-3 pole)	250 (4 pole)
	rated impulse withstand voltage	kV	3.6 (2-3 pole)	2.5 (4 pole)
	pollution degree		2	
	overvoltage category		III	
Insulation between coil and contacts (1.2/50 μ s)		kV	3.6	
Dielectric strength between open contacts		V AC	1,000	
Dielectric strength between adjacent contact		V AC	2,000 (2 CO)	2,000 (3 CO) 1,550 (4 CO)

Conducted disturbance immunity

Burst (5...50)ns, 5 kHz, on A1 - A2	EN 61000-4-4	level 4 (4 kV)
Surge (1.2/50 μ s) on A1 - A2 (differential mode)	EN 61000-4-5	level 4 (4 kV)

Other data


Bounce time: NO/NC	ms	1/4		
Vibration resistance (5...55)Hz, max. \pm 1 mm: NO/NC	g/g	15/15		
Shock resistance	g	16		
Power lost to the environment	without contact current	W	1 (2 pole)	1 (3 pole) 1 (4 pole)
	with rated current	W	3 (2 pole)	4 (3 pole) 3 (4 pole)
Recommended distance between relays mounted on PCB	mm	\geq 5		

55

Contact specification


F 55 - Electrical life (AC) v contact current

2 and 3 pole relays

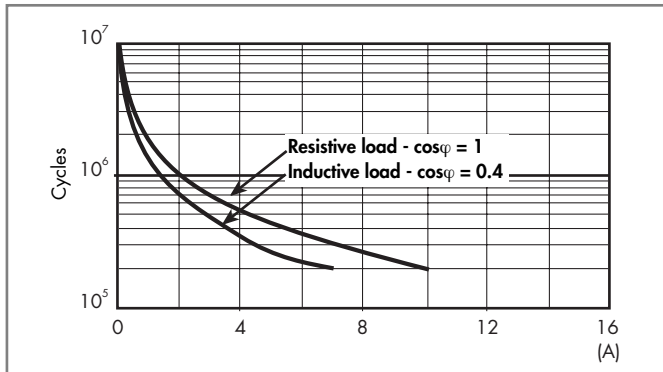


F 55 - Electrical life (AC) v contact current

4 pole relay

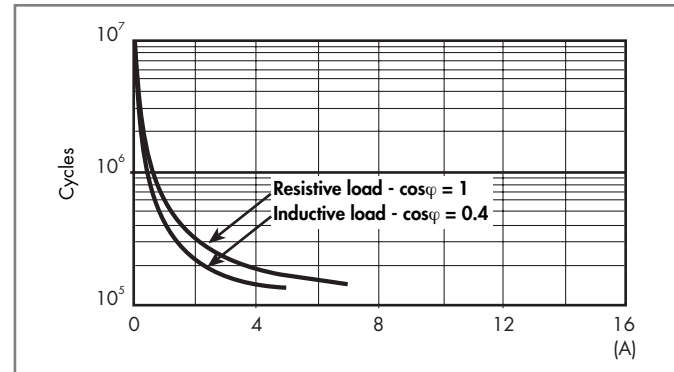

H 55 - Maximum DC1 breaking capacity

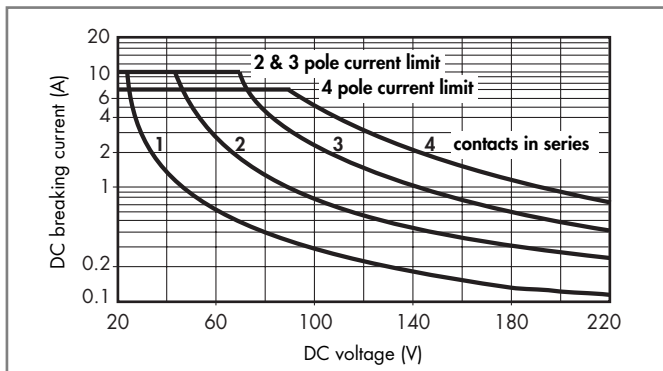

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load. Note: the release time for the load will be increased.