

2. Hold the remote input wire (white) high for 6 to 15 seconds to teach the ON condition.  
The amber LED flashes for 3 seconds while the remote input wire is held high, turns off for 3 seconds, and then begins flashing again at 6 seconds.
3. Release remote input wire before 15 seconds.
4. Position the target at the desired OFF condition.
5. Hold the remote input wire high for 1 second.  
The amber LED is on for 3 seconds, indicating a valid configuration. The green/output LED and the sensor output are OFF.

A moving target causes the amber LED to turn on as the target reaches the threshold. After the target is at or above the threshold, the green/output LED and the sensor output are ON.

## Specifications

### Supply Voltage and Current

10 to 30 V dc (10% maximum ripple)  
Less than 12 mA consumption without load

### Supply Protection Circuitry

Protected against reverse polarity and transient voltages

### Output Configuration

Single-output: 1 NPN or 1 PNP/IO-Link; light operate (LO) or dark operate (DO), depending on model

### Output Rating

Current: Less than 100 mA  
PNP On Voltage: Supply voltage – 2 V  
PNP Off Voltage: Approximately 0 V  
NPN On Voltage: Supply voltage  
NPN Off Voltage: < 2.0 V

### Output Protection Circuitry

Protected against false power-up and continuous overload or short circuit of outputs  
Overload trip point  $\geq 100$  mA

### Light Source

Opposed, Diffuse: 630 nm red LED

### Required Overcurrent Protection



**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.  
Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.  
Supply wiring leads < 24 AWG shall not be spliced.  
For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
20	5.0
22	3.0
24	2.0
26	1.0
28	0.8
30	0.5

### Response Time

Normal Mode: Less than 500  $\mu$ s (default)  
Fine Mode: Less than 1 ms (selectable via IO-Link)  
Fast Mode: Less than 200  $\mu$ s (selectable via IO-Link)

### Switching Frequency

Normal Mode: Less than 1 kHz (default)  
Fine Mode: Less than 500 Hz (selectable via IO-Link)  
Fast Mode: Less than 2.5 kHz (selectable via IO-Link)

### Delay at Power-Up

20 milliseconds

### Repeatability

1 millisecond

### Indicators

Green/output LED: Output is conducting  
Amber LED: Marginal signal or near threshold of the sensor (ON to OFF or OFF to ON)

### Light Spot Size

Diffuse: 5 mm dia (at 10 mm), 8 mm (at 20 mm), and 20 mm (at 50 mm)  
Opposed: 50 mm dia (at 200 mm)

### Construction

V2A stainless steel with PUR cable; PBT/PMMA optics

### Environmental Rating

IEC IP67

### Connection

2 m (6.5 ft) unterminated 3-wire PUR-jacketed cable; 150 mm (6 in) PUR cable with a 3-pin M8/Pico-style quick disconnect; Integral 3-pin M8/Pico-style quick disconnect; 2 m (6.5 ft) unterminated 4-wire PUR-jacketed cable; or 150 mm (6 in) PUR cable with a 4-pin M8/Pico-style quick disconnect, depending on the model

### Operating Conditions

-25 °C to +65 °C (-13 °F to +149 °F)

### Vibration and Mechanical Shock

IEC 60947-5-2


### Certifications




## Dimensions

All measurements are listed in millimeters, unless noted otherwise.





### Cable Models



### Pigtail Models

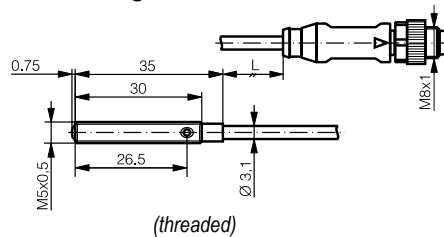


### Connector Models

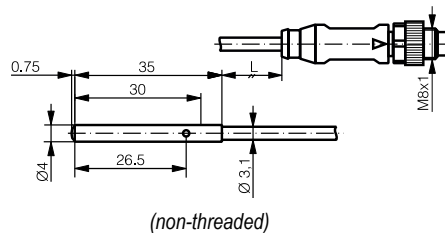


## Performance Curves


### Opposed Models

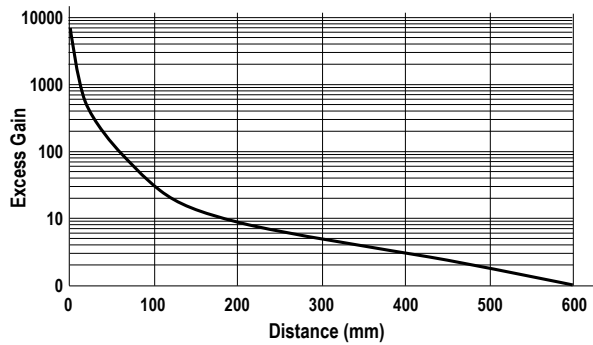


### Diffuse, 10 mm Range Models

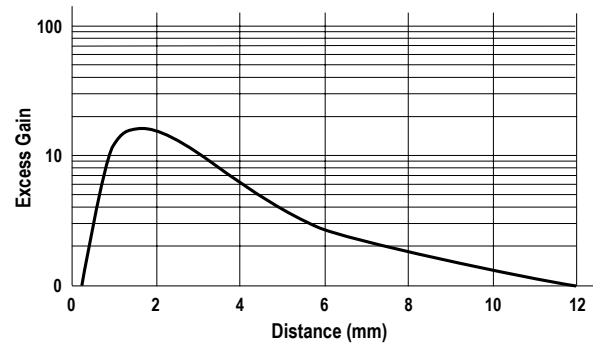


### Diffuse, 20 mm Range Models

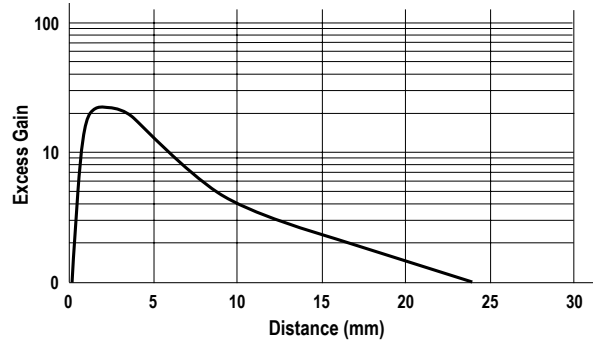

### Diffuse, 50 mm Range Models

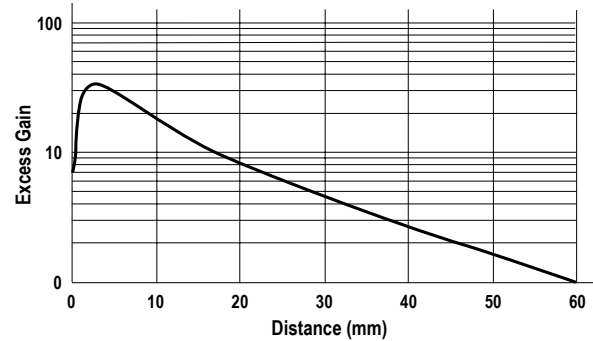

### Diffuse, 100 mm Range Models

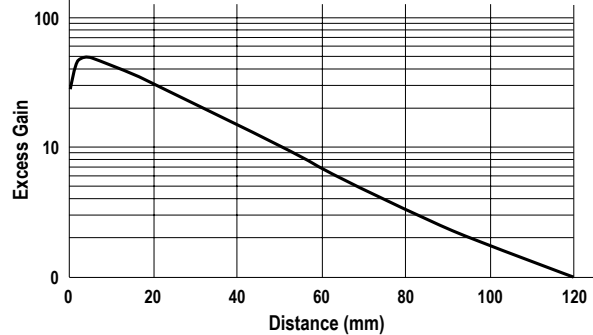

## Accessories

### Brackets

All measurements are listed in millimeters, unless noted otherwise.

#### SMBVSM4

- Mounting clamp for 4 mm barrel-style sensors
- Black impact-resistant plastic

**Hole center spacing:** A = 8.0

**Hole size:** A =  $\phi$  3.3

