

Ratings

Coil

Item	Rated current (mA)	Coil resistance (Ω)	Coil inductance (H)		Must operate voltage	Must release voltage	Max. permissible voltage	Power consumption (VA-W)
Rated voltage			Armature ON	Armature OFF	On the basis of rated voltage			
12 VAC	142	17.0 to 20.4	0.09	0.21	75% max.	15% min.	110%	Approx. 1.7 to 2.5
24 VAC	71							
50 VAC	34							
100 to 120 VAC	17.0 to 20.4							
200 to 240 VAC	8.5 to 10.2	18.9	0.09	0.21	75% max.	15% min.	110%	Approx. 1.9
6 VDC	317							
12 VDC	158							
24 VDC	79							
48 VDC	40							
100 VDC	19							
		5260	21.3	60.0				

- Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with tolerances of +15%/-20% for AC rated current and ±15% for DC coil resistance.
 2. The inductances shown above are reference values.
 3. Performance characteristic data are measured at a coil temperature of 23°C.
 4. The maximum allowable coil voltage refers to the maximum value in a varying range of operating power voltage, measured at ambient temperature 23°C.
 5. The "to" (for example "100 to 120") represents the range of rated voltages.

Contacts

Item	Contact Form	G7L-1A-T□ G7L-1A-B□		G7L-2A-T□ G7L-2A-B□		G7L-1A-P G7L-2A-P	
	load	Resistive load	Inductive load (cosφ = 0.4)	Resistive load	Inductive load (cosφ = 0.4)	Resistive load	Inductive load (cosφ = 0.4)
Contact type	Double break						
Contact material	Ag alloy						
Rated load	30 A at 220 VAC	25 A at 220 VAC	25 A at 220 VAC		20 A at 220 VAC		
Rated carry current	30 A		25 A		20 A		
Max. switching voltage	250 VAC						
Max. switching current	30 A		25 A		20 A		

Note. When using B-series (screw) products, since the screw diameter of the contact terminal is M4, be careful that the contact current should be 20 A or less according to JET standard (electrical appliance and material control law of Japan).

Characteristics

Contact resistance *1	50 mΩ max.
Operate time *2	30 ms max.
Release time *3	30 ms max.
Max. operating frequency	Mechanical 1,800 operations/hr Rated load 1,800 operations/hr
Insulation resistance *3	1,000 MΩ min
Dielectric strength	Between coil and contacts 4,000 VAC min., 50/60 Hz for 1 min
	Between contacts of same polarity 2,000 VAC, 50/60 Hz for 1 min
	Between contacts of different polarity (DPST-NO model)
Impulse withstand voltage	10,000 V between coil and contact *4
Vibration resistance	Destruction 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction 1,000 m/s ²
	Malfunction 100 m/s ²
Endurance	Mechanical 1,000,000 operations min. (at 1,800 operations/hr)
	Electrical *5 100,000 operations min. (at 1,800 operations/hr under rated load)
Failure rate (P level) (reference value *6)	100 mA at 5 VDC
Weight	Approx. 90 g: Quick-connect terminal models Approx. 100 g: PCB terminal models Approx. 120 g: Screw terminal models


Note. The values given above are initial values.

- *1. Measurement conditions: 5 VDC, 1 A, voltage drop method.
 *2. Measurement conditions: Rated operating voltage applied, not including contact bounce. Ambient temperature: 23°C
 *3. Measurement conditions: The insulation resistance was measured with a 500-VDC megohmmeter at the same locations as the dielectric strength was measured.
 *4. JEC-212 (1981) Standard Impulse Wave Type (1.2x50μs).
 *5. Ambient temperature: 23°C
 *6. This value was measured at a switching frequency of 60 operations/min.


Ambient operating temperature	-25°C to 60°C (with no icing or condensation)
Ambient operating humidity	5% to 85%

Engineering Data


G7L-1A-T (TJ) (TUBJ) G7L-1A-B (BJ) (BUBJ) (BUBJ) Maximum Switching Power




G7L-2A-T (TJ) (TUBJ) G7L-2A-B (BJ) (BUBJ) (BUBJ) Maximum Switching Power




G7L-1A-P G7L-2A-P Maximum Switching Power




Ambient Temperature vs. Operate and Release Voltage G7L-1A VAC (60 Hz)




Endurance




Endurance



Endurance




G7L-1A VDC




Ambient Temperature vs. Coil Temperature Rise

G7L-1A 120 VAC (50 Hz)




G7L-1A VDC



Shock Malfunction


G7L-2A-T (TUB) 100 to 120 VAC

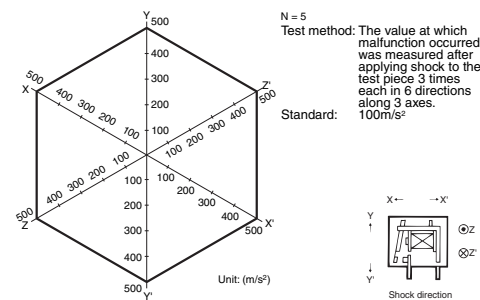


Momentary Voltage Drop Test

G7L-2A-T (TUB) 100 to 120 VAC


Test Circuit



Wave resulted from test




Voltage distribution of wave e which chattering does not occur.




Characteristic variation resulted from different mounting directions

G7L-2A-T (TUB) 100 to 120 VAC


Operate time




Release time



Operate voltage



Release voltage




(Note.)The mounting direction A' deteriorates switching performance.

Actual Load Endurance Test


G7L-2A 100 to 200 VAC

Operate and Release voltages

N = 5




Contact resistance




Operate and Release voltages

N = 5




Contact resistance



Load conditions


• 1 φ 220 VAC



• Applied coil voltage: 100% of rated voltage

Load conditions

• 1 φ 220 VAC



• Applied coil voltage: 100% of rated voltage