


## S-8000 Series

### 1/4" x 1 1/4" Fuse Blocks

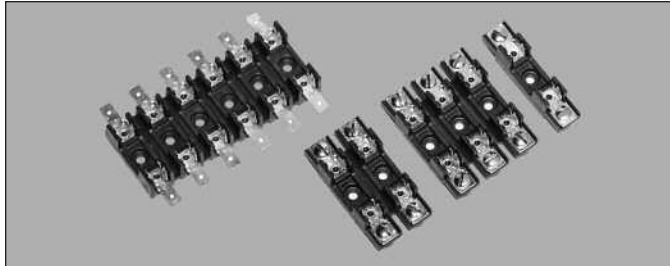

#### Description

- For 1/4" x 1 1/4" (6.3 x 32mm) fuses
- Bolt-in and snap-in mounting available
- Tight cluster mounting
- All types of terminal configurations
- Clips made of spring-bronze
- Anti-rotational pin provided
- Flame retardant thermoplastic meets UL 94V0

#### Environmental Data

- Relative Temperature Index (RTI)
  - Bolt-in 130°C
  - Snap-in 110°C

#### Agency Information

- UL Recognized: E14853
- CSA Certified: 47235


RoHS  
2002/95/EC

#### Specifications


| Series        | Volts     | UL Max Amps | CSA Max. Amps |
|---------------|-----------|-------------|---------------|
| <b>S-8000</b> | 300Vac/dc | 25          | 21            |
| <b>S-8100</b> | 300Vac/dc | 20          | 13            |
| <b>S-8200</b> | 300Vac/dc | 20          | 16            |
| <b>S-8300</b> | 300Vac/dc | 30          | 25            |

#### Dimensions - mm/in.

##### S-8000 Single-Pole Snap-In Mounting Series

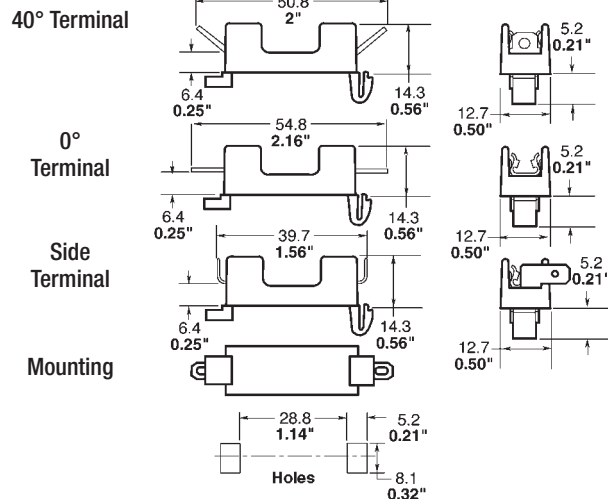

#### Multiple Pole




#### Mounting Dimensions

| No. of Poles | Inches |        | Millimeters |       |
|--------------|--------|--------|-------------|-------|
|              | A      | B      | A           | B     |
| <b>1</b>     | —      | —      | —           | —     |
| <b>2</b>     | 1 1/8" | 5/8"   | 28.6        | 15.9  |
| <b>3</b>     | 1 3/4" | 1 1/4" | 44.4        | 31.8  |
| <b>4</b>     | 2 3/8" | 1 7/8" | 60.3        | 47.6  |
| <b>5</b>     | 3"     | 2 1/2" | 76.2        | 63.5  |
| <b>6</b>     | 3 5/8" | 3 1/8" | 92.1        | 79.4  |
| <b>7</b>     | 4 1/4" | 3 3/4" | 108.0       | 95.2  |
| <b>8</b>     | 4 7/8" | 4 3/8" | 123.8       | 111.1 |
| <b>9</b>     | 5 1/2" | 5"     | 139.7       | 127.0 |
| <b>10</b>    | 6 1/8" | 5 5/8" | 155.6       | 142.9 |
| <b>11</b>    | 6 3/4" | 6 1/4" | 171.4       | 158.8 |
| <b>12</b>    | 7 3/8" | 6 7/8" | 187.3       | 174.6 |


#### Dimensions - mm/in.

##### S-8000 Single-Pole Bolt-In Mounting Series


#### 40° Terminal

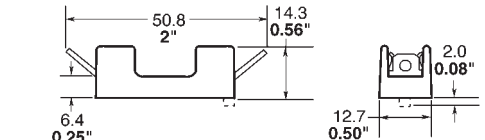


#### 0° Terminal




#### Screw Terminal



#### Side Terminal



#### Mounting

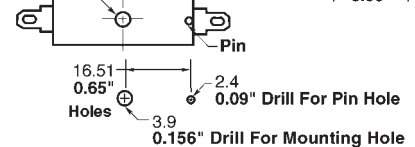

| Component | Material                        |
|-----------|---------------------------------|
| Clip      | Spring-Bronze, Bright Tin-Plate |
| Body      | Thermoplastic                   |

| Packaging Code        |  |
|-----------------------|--|
| Catalog Number Prefix | Description  |
| Blank                 | Varies with number of poles. Contact customer service. |
| BK/                   | Varies with number of poles. Contact customer service. |

### Ordering

- Specify packaging, product, and option code

### Bolt-in Mounting Example:

BK/S-8102-6-R

|            |            |          |           |          |   |          |
|------------|------------|----------|-----------|----------|---|----------|
| <u>BK/</u> | <u>S-8</u> | <u>1</u> | <u>02</u> | <u>6</u> | - | <u>R</u> |
| ↓          | ↓          | ↓        | ↓         | ↓        |   | ↓        |
| 1          | 2          | 3        | 4         | 5        |   | 7        |

### Snap-in Mounting Example:

BK/S-8001-1-SNP-R

|            |            |          |           |   |          |   |            |   |          |
|------------|------------|----------|-----------|---|----------|---|------------|---|----------|
| <u>BK/</u> | <u>S-8</u> | <u>0</u> | <u>01</u> | - | <u>1</u> | - | <u>SNP</u> | - | <u>R</u> |
| ↓          | ↓          | ↓        | ↓         |   | ↓        |   | ↓          |   | ↓        |
| 1          | 2          | 3        | 4         |   | 5        |   | 6          |   | 7        |

1. Packaging Code:

2. Series Number:

3. Type Terminal:

4. Terminal Angle:

5. Number of Poles:

6. Mounting Style:

7. RoHS Compliant Version

BK/

S-8

0 = Solder

1 =  $\frac{3}{16}$ " quick connect

2 =  $\frac{1}{4}$ " quick connect

3 = Screw

01 = Straight (0°)

02 = 40° Angle

03 = Side\*

(1 – 12)

1X = One pole, No Mounting Stud

SNP = Snap-in Mounting\*

-R

\*Available only in single pole

### North America

Cooper Bussmann  
1225 Broken Sound Parkway NW  
Suite F  
Boca Raton, FL 33487-3533  
Tel: 1-561-998-4100  
Fax: 1-561-241-6640  
Toll Free: 1-888-414-2645

Cooper Bussmann  
P.O. Box 14460  
St. Louis, MO 63178-4460  
Tel: 1-636-394-2877  
Fax: 1-636-527-1607

### Europe

Cooper Bussmann  
Cooper (UK) Limited  
Burton-on-the-Wolds  
Leicestershire • LE12 5TH UK  
Tel: +44 (0) 1509 882 737  
Fax: +44 (0) 1509 882 786

Cooper Bussmann  
Avda. Santa Eulalia, 290  
08223  
Terrassa, (Barcelona), Spain  
Tel: +34 937 362 812  
+34 937 362 813  
Fax: +34 937 362 719

### Asia Pacific

Cooper Bussmann  
1 Jalan Kilang Timor  
#06-01 Pacific Tech Centre  
Singapore 159303  
Tel: +65 278 6151  
Fax: +65 270 4160

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

© 2007 Cooper Bussmann  
St. Louis, MO 63178  
www.cooperbussmann.com

