


Products Related to Common Sockets and DIN Tracks

CSM_common_sockets_DS_E_3_5

A Wide Variety of Square and Round Sockets in Front-mounting and Back-mounting Models

- Models available with finger protection.
- Hold-down Clips and Socket Bridges for PYF Sockets are also available.
- New screwless models available.

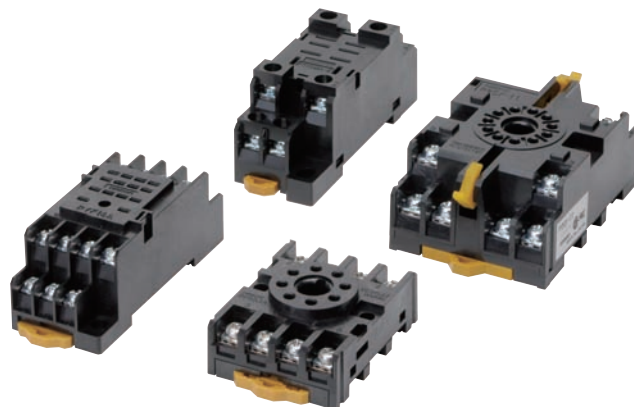

Models Used with Common Sockets

Sockets

| Item | | Model | Number of pins | Applicable Sockets | | | |
|-------------------|---|---|-------------------------------------|--------------------|---------------|-----|----|
| Group name | | | | Front-mounting | Back-mounting | | |
| Proximity Sensors | E2C | E2C-AM4A | 8 | P2CF-08 | P3G | | |
| | | E2C-AK4A | 11 | P2CF-11 | P3GA | | |
| | | E2C-GE4A E2C-GF4A | 8 | PYF08A | PY | | |
| Level Devices | 61F | 61F-GP-N8 61F-APN2 | 8 | PF083A | PL | | |
| | | 61F-UHS | | 8PFA1 | | | |
| | | 61F-HSL | | 8PFA | | | |
| | | 61F-03B, -04B 61F-GP-N 61F-GPN-V50 61F-GPN-BT/BC | 11 | PF113A | | | |
| | | 61F-IP 61F-G1P, -G2P | 14 | 14PFA | | | |
| | | K7L | 8 | P2RF-08(-E) | | --- | |
| | General-purpose Relays and Solid-state Relays | MY (Q, K, H) | MY1, MY2 | 8 | | PYF | PY |
| | | | MY3 | 11 | | | |
| | | | MY4, MYQ4 MY4Z-CBG MY2K, MY4H | 14 | | | |
| | | | LY1, LY2 | 8 | | | |
| LY3 | | 11 | | | | | |
| LY4 | | 14 | | | | | |
| G7K | | G7K-412S | 14 | --- | --- | | |
| G2A(K) | | G2A, G2A-434 G2AK | 14 | PYF | PY | | |
| MK(K) | | MK2P | 8 | PF083A(-E) | PL | | |
| | | MK3P MK2KP | 11 | PF113A(-E) | | | |

| Item | | Model | Number of pins | Applicable Sockets | | | |
|---|-------------|--|-------------------------------------|--------------------|-------------------------|------------|-----|
| Group name | | | | Front-mounting | Back-mounting | | |
| General-purpose Relays and Solid-state Relays | MM | MM2(X)P | 8 | 8PFA | PL | | |
| | | MM3P MM2(X)KP | 11 | PFA | | | |
| | | MM3XP MM3(X)KP MM4(X)P MM4(X)KP | 14 | | | | |
| | | G4Q | --- | | | 8PFA1 | |
| | | G3F | G3F(D) Series G3FM | | | 8 | PYF |
| | | G3H | G3H(D) Series | 8 | | PTF | PT |
| | G3B | G3B(D) Series | 8 | PF083A | PL | | |
| | G9H | G9H-2□□S | 8 | PTF | PT | | |
| | G2R | G2R-1-S□ | 5 | P2RF-05□ | P2R-05□ | | |
| | | G2R-2-S□ | 8 | P2RF-08□ | P2R-08□ | | |
| | G3R | --- | 5 | P2RF-05□ | P2R-05□ | | |
| | G7T G3TA | G7T G3TA | 5 | P7TF-05 | --- | | |
| | G7S | G7S-4A2B-E G7S-3A3B-E | 14 | P7S-14F-END | P7S-14P-E | | |
| | | G7SA | G7SA-3A1B G7SA-2A2B | 10 | P7SA-10F P7SA-10F-ND | P7SA-10P | |
| | | | G7SA-5A1B G7SA-4A2B G7SA-3A3B | 14 | P7SA-14F P7SA-14F-ND | P7SA-14P | |
| | Timers | H3CA | H3CA-8(H) | 8 | P2CF | P3G PL | |
| | | | H3CA-A | 11 | | P3GA PL | |
| H5CN | | H5CN-□M | 11 | P3GA | | | |
| | | Other H5CN models | 8 | P3G | | | |
| H5CX | | H5CX-L8□ | 8 | P3G | | | |
| | | H5CX-A11□ | 11 | P3GA | | | |
| H5CZ | | H5CZ-L8□ | 8 | P3G | | | |

Products Related to Common Sockets and DIN Tracks

| Group name | Item | Model | Number of pins | Applicable Sockets | |
|---|-------------------|--|----------------|---------------------------------|--------------------------------|
| | | | | Front-mounting | Back-mounting |
| Timers | H3CR | H3CR-A8□ H3CR-F8□ H3CR-G8□ H3CR-H8□ | 8 | P2CF | P3G PL |
| | | H3CR-A H3CR-AS H3CR-AP H3CR-F H3CR-FN H3CR-HRL | 11 | | P3GA PL |
| | H3M | --- | 8 | PF085A | P3G PL |
| | H3Y | H3Y-2 | 8 | PYF | PY |
| | | H3Y-4 | 14 | | |
| | H3YN | H3YN-2□ | 8 | | |
| | | H3YN-4□ | 14 | | |
| | H3RN | H3RN-1□ | 5 | P2RF-□-E | P2R □-□7P |
| | | H3RN-2□ | 8 | | |
| | RD2P | --- | 8 | 8PFA1 | PL |
| H2C | --- | 8 | P2CF PF085A | P3G PL | |
| Counters | H7CX | H7CX-A11□ | 11 | P2CF | P3GA |
| | H7CZ | H7CZ-L8□ | 8 | | P3G |
| | H7CN | H7CN-□M | 11 | | P3GA |
| | | Other H7CN models | 8 | | P3G |
| E5CC | E5CC-□U | 11 | P3GA | | |
| E5C2 | --- | 8 | P3G | | |
| E5CS | E5CS-□1, □2 | 11 | P3GA | | |
| | Other E5CS models | 8 | P3G | | |
| E5L | --- | 14 | PTF14A | | --- |
| Signal Converters | K3FK | K3FK models not listed below | 8 | | 8PFA (Included with Converter) |
| | | K3FK-G□ K3FK-GS□ K3FK-SL-75-□ | 11 | 11PFA (Included with Converter) | |
| Component Protective Components | SE | SE-KP□N | 8 | 8PFA1 | --- |
| | SAO | SAO-□ | | PF083A | PL08 |
| | APR | APR-S APR-S380/-S440 | | 11 | P2CF-11 |
| | K2CU | K2CU-P | 8 | 8PFA1 | --- |
| | SDV | SDV-F□□-FH□□ SDV-D□□ | | 14 | 14PFA |
| | LG2 | LG2-□ | 8 | PF083A | PL08 |
| | K6EL | K6EL-□ | 11 | P2CF-11 | PL11 and P3GA-11 |
| Products for High-voltage Power Receiving Equipment | AGF | AGF-1-P5 | 8 | 8PFA1 | --- |
| Annunciators | MYA | MYA-NA1, -NB1 | 8 | PF083A | PL |
| | | MYA-NA2, -NB2 MYA-LA1, -LB1 MYA-LA2, -LB2 MYA-LA12, -LB12 | 11 | PF113A | |

Hold-down Clips For Square Sockets

| Sockets | PYF□A PTF□A | PYF08M | PY□(QN) PT□(QN) | PY□-02 PT□-0 |
|-------------------------------|---|--------------|-------------------------|-----------------|
| Applicable models | MY□, MY□N, MY□-D, MY2□-CR, MY4□-CR, MY4Z□-CR, MY□-TU, MY2K, MY□N-D2, LY□, LY□N, LY□-TU, MY□□, G3H(D) Series, G3F(D) Series, G3FM, and G9H | PYC PYC-P | PYC-P PYC-S | PYC-P |
| MY□□ * LY□ | --- | --- | PYC-P2 | |
| MY4H | --- | --- | PYC-P | |
| MY2Z□-CR MY3□-CR LY□-CR | Y92H-3 | --- | PYC-1 | |
| G2A(K) Series | PYC-A2 | --- | PYC-2 PYC-3 PYC-5 | PYC-3 PYC-5 |
| G7K | PKC | --- | --- | |
| H3Y | Y92H-3 | --- | Y92H-4 | |

Note: The □ in the model number is replaced with 08, 11, or 14.
* If you use a Hold-down Clip with the MY2I, you cannot use the PYF08A.
Use the PYF14A.

For Round Sockets

| Sockets | PF083A PF113A | PL08 (-Q) PL11 (-Q) | PLE08-0 PLE11-0 | P2CF-11 |
|--|------------------|------------------------|--------------------|---------|
| Applicable models | PFC-A1 | PLC | PLC-10 | --- |
| 61F-03B, -04B | PFC-N8 | PHC-5 | | |
| 61F-GP-N, -GP-N-BT 61F-GP-N8 ?61F-APN2 | PFC-A1 | PLC | --- | --- |
| MK2P Series, MK2KP, MK3P□(-US), and G3B(D) Series | | PLC-1 | | |
| MK3ZP MK3LP | PFC-A6 | PLC-7 | --- | --- |
| MYA-NA1, -NB1 MYA-LA1, -LB1 MYA-NA2, -NB2 MYA-LA2, -LB2 | | PLC-8 | --- | --- |
| MYA-LA12, -LB12 | PFC-A7 | PLC-8 | --- | --- |
| APR-S | PFC-A6 | PLC-7 | --- | --- |
| APR-S380/-S440 | --- | --- | --- | Y92H-1 |
| LG2 | PFC-A7 | PLC-8 | --- | --- |
| K6EL | --- | Y92H-1 | --- | --- |

Note: 1. The 8PFA(1), 11PFA, and 14PFA are held with hooks.
2. The PL15, PL20, and PF202, as well as models not given in the above table, require panel processing for installation.
3. The PF085A Hold-down Clip is included with the H3M and H2A. It is an option (sold separately) for the H2C.