

Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO House
Temple Bank, Riverway
Harlow, Essex CM 20 2TT, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

885 Fox Chase, Suite 103
Coatesville PA 19320, USA
Phone: 610-380-8002
1-800-554-JUMO
Fax: 610-380-8009
E-mail: info@JumoUSA.com
Internet: www.JumoUSA.com



Indoor, outdoor and duct resistance thermometers


- for temperatures from -30 to +80°C (200°C)
- for use in HVAC
- IP20 to IP65 protection
- for 2-wire, 3-wire or 4-wire connections
- fitted transmitter option 4 – 20mA / 0 – 10V

Indoor, outdoor and duct resistance thermometers for HVAC applications are mainly used for temperature measurement in rooms, air ducts and outdoors.

Different instrument versions with plastic housings for different protection ratings are available to suit the particular measurement task.

The measuring insert is normally fitted with a Pt100 temperature sensor to EN 60 751, Class B, in 2-wire circuit. Versions with Pt500, Pt1000 or Ni 1000 can also be supplied. An extension in 3- or 4-wire circuit, starting from the terminals, is possible.

A transmitter can optionally be integrated.

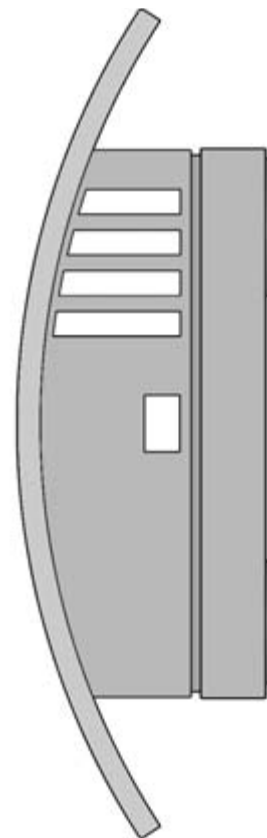

Technical data

Terminal box

plastic PC housing (material PP on Type 902523/11), IP20 to IP65,
Type 902523/25: IP54 and IP65 protection

Protection tube

stainless steel 1.4571; 5.4mm and 6mm dia.

Measuring insert

Pt100 temperature sensor, EN 60 751, Class B, 2-wire circuit

Transmitter

analog transmitter, output signal 4 – 20mA or 0 – 10V

Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO House
Temple Bank, Riverway
Harlow, Essex CM 20 2TT, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

885 Fox Chase, Suite 103
Coatesville PA 19320, USA
Phone: 610-380-8002
1-800-554-JUMO
Fax: 610-380-8009
E-mail: info@JumoUSA.com
Internet: www.JumoUSA.com





Transmitter		Output 4 – 20mA	Output 0 – 10V
	Input		
	Measurement input	Pt100 (EN 60 751)	
	Sensor current	≤ 0.5mA	
	Sampling rate	continuous measurement because of analog signal path	
	Measurement circuit monitoring		
	Underrange	falling to ≤ 3.6mA	0V
	Overrange	rising to ≥ 22mA to < 28mA (24mA typical)	rising to ≥ 11V to < 14V (12V typical)
	Probe short circuit	≤ 3.6mA	0V
	Probe and lead break	≥ 22mA to < 28mA (24mA typical)	≥ 11V to < 14V (12V typical)
	Output		
	Output signal	proportional DC current 4 – 20mA	DC voltage 0 – 10V
	Transfer characteristic	linear with temperature	
	Transfer accuracy	≤ ±0.1 %	≤ ±0.2 %
	Damping of ripple on 24V supply voltage, amplitude 10V/50Hz, burden 470Ω/load 10MΩ	37 dB	40dB
	Burden (Rb)	Rb = (Ub - 7.5V) / 22mA	-
	Burden error	≤ ±0.02 % / 100Ω ¹	-
	Load/load error	-	≥ 10kΩ / ≤ ±0.1 %
	Settling time on temperature change	≤ 10msec	
	Calibration conditions	24V DC / approx. 22°C	
	Calibration accuracy	≤ ±0.2 % ^{1,2} or ≤ ±0.2°C	
	Overall accuracy: sensor/calibration	±0.4°C (typical) at 20°C / 24V supply voltage	
	Supply		
	Supply voltage (Ub)	7.5 – 30V DC	15 – 30V DC
	Reverse polarity protection	yes	
	Supply voltage error	≤ ±0.01 % per V deviation from 24V ¹	
	Ambient conditions		
	Operating temperature range	-40 to +85°C	
	Storage temperature range	-40 to +100°C	
	Temperature error	≤ ±0.01 % per °C deviation from 22°C ¹	
	Climatic conditions similar to EN 60 654, Class C1	relative humidity ≤ 95 % annual mean, no condensation	
	EMC interference emission/immunity	EN 61 326, Class B / to industrial requirements	

1. All data refer to the end-of-range value 20mA.

2. The larger value applies.

Connection example with supply unit, 4 – 20mA output

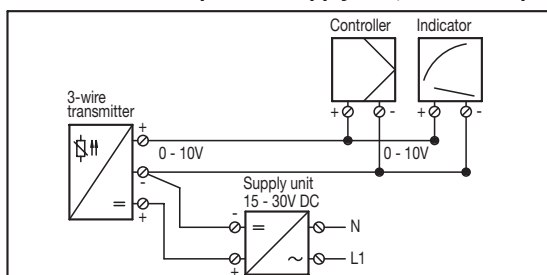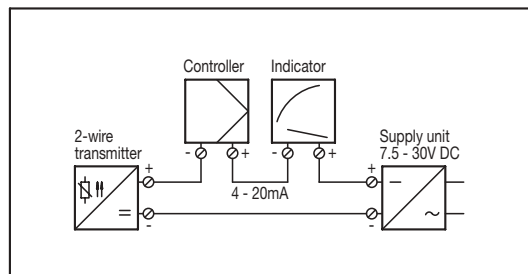

Connection diagram

Output 4 – 20mA

Connection for	Terminal
Supply voltage 7.5 - 30V DC	+ 81
Current output 4 - 20mA	- 82
	81 82
	+ -

Output 0 - 10V

Connection for	Terminal
Supply voltage 15 - 30V DC	+ 81
Voltage output 0 - 10V	- 82
	+ 83
	81 82 83
	+ - +