


■ Characteristics

Contact resistance		50 mΩ max.
Operate time		AC: 20 ms max. DC: 30 ms max.
Release time		20 ms max.
Operating frequency	Mechanical	18,000 operations/hour
	Electrical	1,800 operations/hour (under rated load)
Insulation resistance		100 MΩ min. (at 500 VDC)
Dielectric strength		2,500 VAC, 50/60 Hz for 1 minute between coil and contacts 1,000 VAC, 50/60 Hz for 1 minute between contacts of same poles, between terminals of the same polarity 2,500 VAC, 50/60 Hz for 1 minute between current-carrying parts, noncurrent-carrying parts, and terminals of opposite polarity
Vibration	Mechanical durability	10 to 55 Hz, 1.50 mm (0.06 in) double amplitude
	Malfunction durability	10 to 55 Hz, 1.00 mm (0.04 in) double amplitude
Shock	Mechanical durability	1,000 m/s ² (approx. 100 G)
	Malfunction durability	100 m/s ² (approx. 10 G)
Ambient temperature		Operation: -10° to 40°C (14° to 104°F)
Humidity		35 to 85% RH
Service Life	Mechanical	10 million operations min. (at operating frequency of 18,000 operations/hour)
	Electrical	100,000 operations at rated load (at operating frequency of 1,800 operations/hour)
Weight		Approx. 85 g (3.0 oz)


Note: Data shown are of initial value.

■ Characteristic Data

Maximum switching capacity
MK2P-S

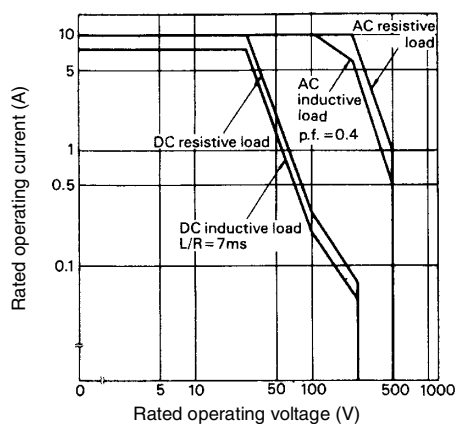


Electrical service life
MK2P-S, MK3P5-S

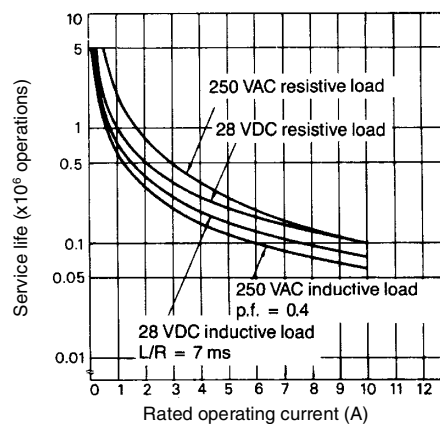

Dimensions


Unit: mm (inch)

■ Relays

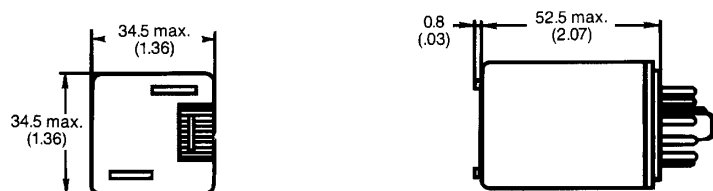


■ Terminal Arrangement (Bottom view)


Standard type (AC/DC coil)
MK2P-I, -S




MK3P5-I, -S




LED indicator type (AC coil)
MK2PN-I, -S




MK3PN-5-I, -S




LED indicator type (DC coil)
MK2PN-I, -S




MK3PN-5-I, -S




Diode type (DC coil)
MK2PD-I, -S




MK3PD-5-I, -S




Varsistor type (AC coil)
MK2PV-I, -S




MK3PV-5-I, -S




LED indicator and diode type (DC coil)
MK2PND-I, -S



MK3PND-5-I, -S



LED indicator and Varsistor type (AC coil)
MK2PNV-I, -S



MK3PNV-5-I, -S

