



Zeit/Strom-Kennlinien
Time-Current Curves

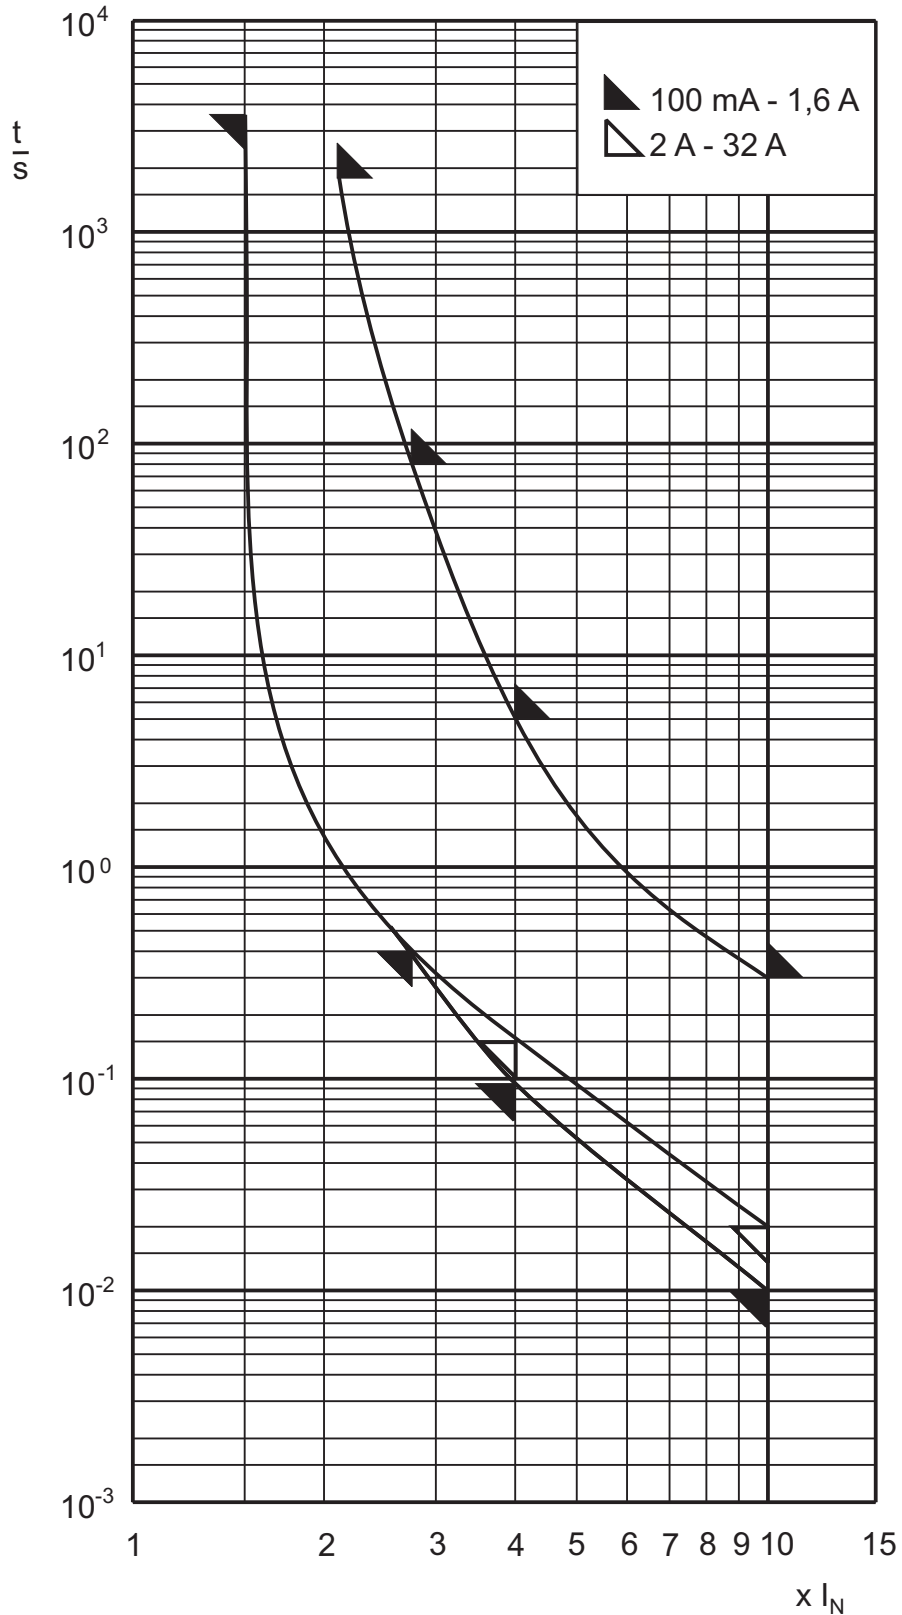

Elektrische Daten
Electrical data

Bemessungs- strom Rated current	Spannungsfall Voltage drop @ I_N [mV]	Leistungsabgabe Power loss @ $1,5 \times I_N$ [W]	Schmelzintegral Pre-arcing i^2t -value @ $10 \times I_N$ [A ² s]	Bemessungs- Ausschaltvermögen Rated breaking capacity		Approbationen Approvals 
				AC *	DC	
100 mA	3600	1,3	0,04	1500 A @ 500 V	1500 A @ 400 V	✓
125 mA	3400	1,4	0,06	1500 A @ 500 V	1500 A @ 400 V	✓
160 mA	3000	1,5	0,1	1500 A @ 500 V	1500 A @ 400 V	✓
200 mA	2500	1,6	0,18	1500 A @ 500 V	1500 A @ 400 V	✓
250 mA	2000	1,7	0,25	1500 A @ 500 V	1500 A @ 400 V	✓
315 mA	1800	1,8	0,45	1500 A @ 500 V	1500 A @ 400 V	✓
400 mA	1600	2,0	0,45	1500 A @ 500 V	1500 A @ 400 V	✓
500 mA	450	0,6	0,35	1500 A @ 500 V	1500 A @ 400 V	✓
630 mA	400	0,7	0,49	1500 A @ 500 V	1500 A @ 400 V	✓
800 mA	350	0,8	0,9	1500 A @ 500 V	1500 A @ 400 V	✓
1 A	350	0,9	1,4	1500 A @ 500 V	1500 A @ 400 V	✓
1,25 A	300	1,0	3,2	1500 A @ 500 V	1500 A @ 400 V	✓
1,6 A	200	1,1	5,2	1500 A @ 500 V	1500 A @ 400 V	✓
2 A	180	1,2	10	1500 A @ 500 V	1500 A @ 400 V	✓
2,5 A	160	1,3	19	1500 A @ 500 V	1500 A @ 400 V	✓
3,15 A	150	1,4	37	1500 A @ 500 V	1500 A @ 400 V *	✓
4 A	140	1,5	68	1500 A @ 500 V	1500 A @ 400 V *	✓
5 A	135	2,2	80	1500 A @ 500 V	1500 A @ 400 V *	✓
6,3 A	110	2,2	215	1500 A @ 500 V	1500 A @ 400 V *	✓
8 A	110	2,6	370	1500 A @ 500 V	1500 A @ 400 V	✓
10 A	100	3,0	620	1500 A @ 500 V	1500 A @ 400 V	✓
12,5 A	100	3,5	1300	1500 A @ 500 V	6 kA @ 300 V	✓
15 A	100	3,7	2500	1500 A @ 500 V	6 kA @ 300 V	
16 A	100	4	2500	1500 A @ 500 V	6 kA @ 300 V	✓
20 A	100	6	3400	1500 A @ 440 V	6 kA @ 300 V	
25 A	100	8	5600	1500 A @ 440 V	6 kA @ 300 V	
32 A	80	10	12100	1500 A @ 250 V	6 kA @ 300 V	

* mit den angegebener Approbationen
with the indicated approvals

Grenzeleistungsaufnahme und Bemessungsspannung des Sicherungshalters berücksichtige
Power loss limit and rated voltage of the fuse-holder has to be considered