


Products Related to Common Sockets and DIN Tracks

CSM_common_sockets_DS_E_3_5

A Wide Variety of Square and Round Sockets in Front-mounting and Back-mounting Models

- Models available with finger protection.
- Hold-down Clips and Socket Bridges for PYF Sockets are also available.
- New screwless models available.

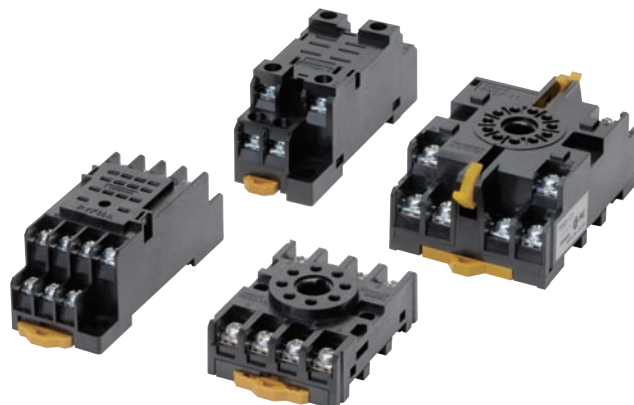

Models Used with Common Sockets

Sockets

Item		Model	Number of pins	Applicable Sockets	
Group name				Front-mounting	Back-mounting
Proximity Sensors	E2C	E2C-AM4A	8	P2CF-08	P3G
		E2C-AK4A	11	P2CF-11	P3GA
		E2C-GE4A	8	PYF08A	PY
		E2C-GF4A			
Level Devices	61F	61F-GP-N8	8	PF083A	PL
		61F-APN2		8PFA1	
		61F-UHS		8PFA	
		61F-HSL	11	PF113A	
		61F-03B, -04B		14PFA	
		61F-GP-N			
	61F-GPN-V50	14	14PFA		
	61F-GPN-BT/BC				
	K7L	61F-IP	14	14PFA	
		61F-G1P, -G2P			
General-purpose Relays and Solid-state Relays	MY (Q, K, H)	K7L-AT50/AT50D	8	P2RF-08(-E)	---
		K7L-U/-UD			
		MY1, MY2			
		MY3			
	LY	MY4, MYQ4	14	PYF	PY
		MY4Z-CBG			
		MY2K, MY4H			
		LY1, LY2			
	G7K	LY3	14	PTF	PT
		LY4			
		G7K-412S			
	G2A(K)	G2A, G2A-434	14	PYF	PY
		G2AK			
	MK(K)	MK2P	8	PF083A(-E)	PL
MK3P		11	PF113A(-E)		
MK2KP					

Item		Model	Number of pins	Applicable Sockets	
Group name				Front-mounting	Back-mounting
General-purpose Relays and Solid-state Relays	MM	MM2(X)P	8	8PFA	PL
		MM3P	11	PFA	
		MM2(X)KP			
		MM3XP	14		
		MM3(X)KP			
	MM4(X)P				
	MM4(X)KP				
	G4Q	---	8	8PFA1	PL
	G3F	G3F(D) Series G3FM	8	PYF	PY
	G3H	G3H(D) Series		PTF	PT
	G3B	G3B(D) Series		PF083A	PL
	G9H	G9H-2□□S		PTF	PT
	G2R	G2R-1-S□	5	P2RF-05□	P2R -05□
		G2R-2-S□	8	P2RF-08□	P2R -08□
	G3R	---	5	P2RF-05□	P2R -05□
	G7T G3TA	G7T G3TA	5	P7TF-05	---
G7S	G7S-4A2B-E G7S-3A3B-E	14	P7S-14F-END	P7S -14P-E	
G7SA	G7SA-3A1B G7SA-2A2B	10	P7SA-10F P7SA-10F-ND	P7SA □-10P	
	G7SA-5A1B G7SA-4A2B G7SA-3A3B	14	P7SA-14F P7SA-14F-ND	P7SA □-14P	
	H3CA	H3CA-8(H)	8	P2CF	P3G PL
		H3CA-A	11		P3GA PL
H5CN	H5CN-□M	11	P3GA		
	Other H5CN models	8	P3G		
H5CX	H5CX-L8□	8	P3G		
	H5CX-A11□	11	P3GA		
H5CZ	H5CZ-L8□	8	P3G		

Products Related to Common Sockets and DIN Tracks

Item		Model	Number of pins	Applicable Sockets	
				Front-mounting	Back-mounting
Group name					
Timers	H3CR	H3CR-A8□ H3CR-F8□ H3CR-G8□ H3CR-H8□	8	P2CF	P3G PL
		H3CR-A H3CR-AS H3CR-AP H3CR-F H3CR-FN H3CR-HRL	11		P3GA PL
	H3M	---	8	PF085A	P3G PL
	H3Y	H3Y-2	8	PYF	PY
		H3Y-4	14		
	H3YN	H3YN-2□	8		
		H3YN-4□	14		
	H3RN	H3RN-1□	5	P2RF-□-E	P2R □-□7P
		H3RN-2□	8		
	RD2P	---	8	8PFA1	PL
	H2C	---	8	P2CF PF085A	P3G PL
Counters	H7CX	H7CX-A11□	11	P2CF	P3GA
	H7CZ	H7CZ-L8□	8		P3G
	H7CN	H7CN-□M	11		P3GA
		Other H7CN models	8		P3G
Temperature Controllers	E5CC	E5CC-□U	11		P3GA
	E5C2	---	8		P3G
	E5CS	E5CS-□1, □2	11		P3GA
		Other E5CS models	8		P3G
	E5L	---	14	PTF14A	---
Signal Converters	K3FK	K3FK models not listed below	8	8PFA (Included with Converter)	---
		K3FK-G□ K3FK-GS□ K3FK-SL-75-□	11	11PFA (Included with Converter)	
Component Protective Components	SE	SE-KP□N	8	8PFA1	---
	SAO	SAO-□		PF083A	PL08
	APR	APR-S APR-S380/-S440		11	P2CF-11 PL11
	K2CU	K2CU-P	8	8PFA1	---
	SDV	SDV-F□□/-FH□T		14	14PFA
		SDV-D□□	8	PF083A	PL08
	LG2	LG2-□	8	PF083A	PL08
	K6EL	K6EL-□	11	P2CF-11	PL11 and P3GA-11
Products for High-voltage Power Receiving Equipment	AGF	AGF-1-P5	8	8PFA1	---
Annunciators	MYA	MYA-NA1, -NB1	8	PF083A	PL
		MYA-NA2, -NB2 MYA-LA1, -LB1 MYA-LA2, -LB2 MYA-LA12, -LB12	11	PF113A	

Hold-down Clips For Square Sockets

Sockets	PYF□A PTF□A	PYF08M	PY□(QN) PT□(QN)	PY□-02 PT□-0
Applicable models	MY□, MY□N, MY□-D, MY2□-CR, MY4□-CR, MY42□-CR, MY□-TU, MY2K, MY□N-D2, LY□, LY□N, LY□-TU, MYQ□, G3H(D) Series, G3F(D) Series, G3FM, and G9H	PYC PYC-P	PYC-P PYC-S	PYC-P
MY□□ * LY□□	---	---	PYC-P2	---
MY4H	---	---	PYC-P	---
MY2Z□-CR MY3□-CR LY□-CR	Y92H-3	---	PYC-1	---
G2A(K) Series	PYC-A2	---	PYC-2 PYC-3 PYC-5	PYC-3 PYC-5
G7K	PKC	---	---	---
H3Y	Y92H-3	---	Y92H-4	---

Note: The □ in the model number is replaced with 08, 11, or 14.
* If you use a Hold-down Clip with the MY2I, you cannot use the PYF08A.
Use the PYF14A.

For Round Sockets

Sockets	PF083A PF113A	PL08 (-Q) PL11 (-Q)	PLE08-0 PLE11-0	P2CF-11
Applicable models	61F-03B, -04B	PFC-A1	PLC	PLC-10
61F-GP-N, -GPN-BT 61F-GP-N8 ?61F-APN2	PFC-N8	PHC-5	---	
MK2P Series, MK2KP, MK3P□(-US), and G3B(D) Series	PFC-A1	PLC	---	
MK3ZP MK3LP	---	PLC-1	---	---
MYA-NA1, -NB1 MYA-LA1, -LB1 MYA-NA2, -NB2 MYA-LA2, -LB2	PFC-A6	PLC-7	---	---
MYA-LA12, -LB12	PFC-A7	PLC-8	---	---
APR-S	PFC-A6	PLC-7	---	---
APR-S380/-S440	---	---	---	Y92H-1
LG2	PFC-A7	PLC-8	---	---
K6EL	---	Y92H-1	---	---

Note: 1. The 8PFA(1), 11PFA, and 14PFA are held with hooks.
2. The PL15, PL20, and PF202, as well as models not given in the above table, require panel processing for installation.
3. The PF085A Hold-down Clip is included with the H3M and H2A. It is an option (sold separately) for the H2C.