

100W Single Output Switching Power Supply

RS-100 series



- Features :
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- * All using 105 $^\circ\!\!\mathbb{C}$ long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to $70^\circ\!\mathrm{C}$
- Withstand 5G vibration test
- High efficiency, long life and high reliability




SPECIFICATION

| MODEL | | RS-100-3.3 | RS-100-5 | RS-100-12 | RS-100-15 | RS-100-24 | RS-100-48 |
|-----------------|--|--|--------------|--------------|----------------|--------------|--------------|
| OUTPUT | DC VOLTAGE | 3.3V | 5V | 12V | 15V | 24V | 48V |
| | RATED CURRENT | 20A | 16A | 8.5A | 7A | 4.5A | 2.3A |
| | CURRENT RANGE | 0~20A | 0~16A | 0~8.5A | 0~7A | 0~4.5A | 0~2.3A |
| | RATED POWER | 66W | 80W | 102W | 105W | 108W | 110.4W |
| | RIPPLE & NOISE (max.) Note.2 | 80mVp-p | 80mVp-p | 120mVp-p | 120mVp-p | 120mVp-p | 200mVp-p |
| | VOLTAGE ADJ. RANGE | 3.2V ~ 3.5V | 4.75 ~ 5.5V | 11.4 ~ 13.2V | 14.25 ~ 16.5V | 22.8 ~ 26.4V | 45.6 ~ 52.8V |
| | VOLTAGE TOLERANCE Note.3 | ±3.0% | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| | LINE REGULATION Note.4 | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | LOAD REGULATION Note.5 | ±2.0% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | SETUP, RISE TIME | 500ms, 20ms/230VAC 1200ms, 30ms/115VAC at full load | | | | | |
| | HOLD UP TIME (Typ.) | 100ms/230VAC 18ms/115VAC at full load | | | | | |
| INPUT | VOLTAGE RANGE | 88 ~ 264VAC 125 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage) | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | |
| | EFFICIENCY (Typ.) | 74% | 77% | 81% | 82% | 84% | 84% |
| | AC CURRENT (Typ.) | 2.5A/115VAC 1.5A/230VAC | | | | | |
| | INRUSH CURRENT (Typ.) | COLD START 40A/230VAC | | | | | |
| | LEAKAGE CURRENT | <2mA/240VAC | | | | | |
| PROTECTION | OVERLOAD | 110 ~ 150% rated output power | | | | | |
| | | Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | |
| | | 3.8 ~ 4.45V | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V | 55.2 ~ 64.8V |
| | OVER VOLTAGE | Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | |
| ENVIRONMENT | WORKING TEMP. | -25 ~ +70°C (Refer to "Derating Curve") | | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0~50°C) | | | | | |
| | VIBRATION | 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | |
| | SAFETY STANDARDS | UL60950-1, TUV EN60950-1 approved | | | | | |
| SAFETY & | WITHSTAND VOLTAGE | I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC | | | | | |
| EMC (Note 6) | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH | | | | | |
| | EMC EMISSION | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3 | | | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2), heavy industry level, criteria A | | | | | |
| OTHERS | MTBF | 260.8Khrs min. MIL-HDBK-217F (25°C) | | | | | |
| | DIMENSION | 159*97*38mm (L*W*H) | | | | | |
| | PACKING | 0.6Kg; 24pcs/15.4Kg/0.7CUFT | | | | | |
| NOTE | Ripple & noise are measured Tolerance : includes set up Line regulation is measured Load regulation is measured The power supply is consid EMC directives. For guidar (as available on http://www. | cially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. ured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. up tolerance, line regulation and load regulation. red from low line to high line at rated load. ured from 0% to 100% rated load. sidered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets lance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." w.meanwell.com) measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time. | | | | | |



RS-100 series

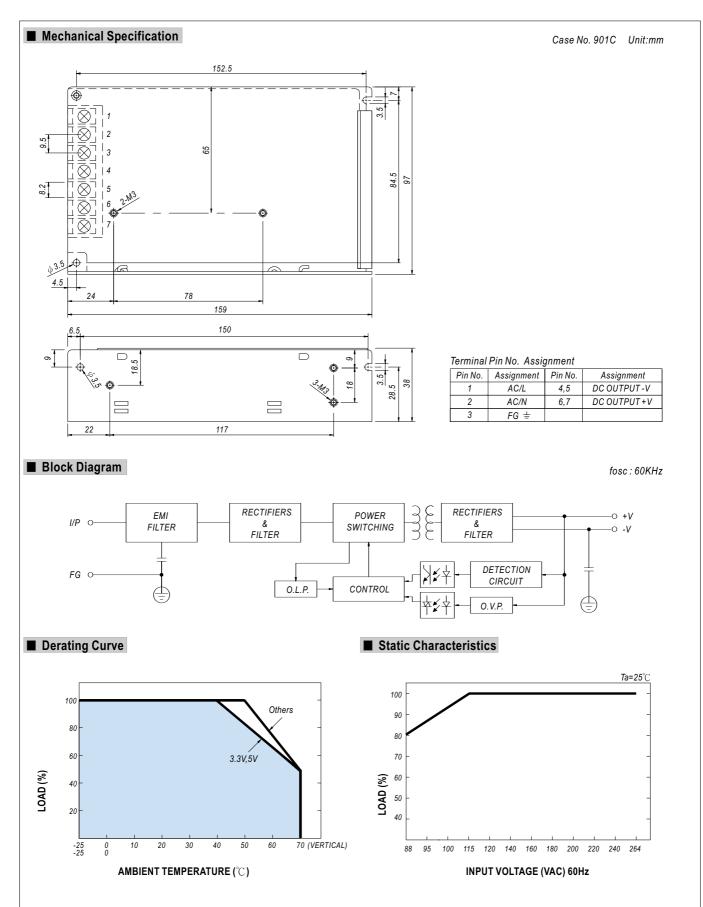

File Name:RS-100-SPEC 2011-08-19