

# Cylindrical Fuse Links for Industrial Applications

## Class gG/gL and aM, 0.16 to 125A, 400 to 690Vac



**Catalogue Symbol:**

Class gG/gL			
Size (mm)	Without Indicator (Example)	With Indicator (Example)	With Striker* (Example)
8 x 31	C08G(amps) (C08G4)	C08G(amps)I (C08G4I)	N/A
10 x 38	C10G(amps) (C10G4)	C10G(amps)I (C10G4I)	N/A
14 x 51	C14G(amps) (C14G4)	C14G(amps)I (C14G4I)	C14G(amps)S* (C14G4S)
22 x 58	C22G(amps) (C22G4)	C22G(amps)I (C22G4I)	C22G(amps)S* (C22G4S)
Class aM			
8 x 31	C08M(amps) (C08M4)	N/A	N/A
10 x 38	C10M(amps) (C10M4)	C10M(amps)I (C10M4I)	N/A
14 x 51	C14M(amps) (C14M4)	C14M(amps)I (C14M4I)	C14M(amps)S* (C14M4S)
22 x 58	C22M(amps) (C22M12)	C22M(amps)I (C22M12I)	C22M(amps)S* (C22M12S)

**Class of Operation:**  
 gG-gL For general purpose applications  
 aM For motor protection applications

**Fuse Holders:** Refer to data sheet 2143

**Standards/Approvals:** IEC 60269

**Description:** Cylindrical class gG-gL and aM fuse links are intended for industrial applications. Some industrial fuse links are available with an operated visible fuse indicator. Sizes 14 x 51, 22 x 58 in both class gG-gL and aM are also available with a built-in striker for micro-switch operation and remote indication.


**Packaging:**  
 MOQ: please contact our customer service department  
 00 44 (0) 1509 882 600 or bulesales@cooperindustries.com

**Technical Data:**  
 Rated voltage: from 400 to 690Vac  
 Amps: 0.16 to 125A  
 Rated breaking capacity: 20 to 120kA


\* Striker fuse links can operate a micro-switch for remote fuse link operated indication

**Dimensions - mm**

Fuse Links - with or without indicator

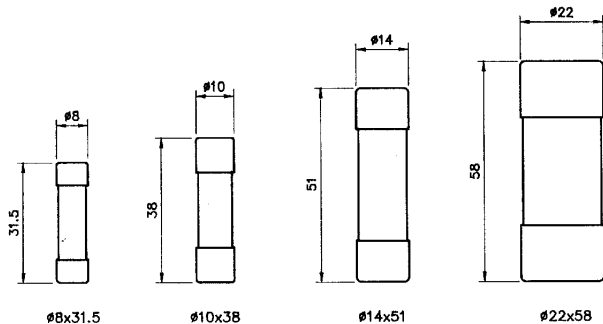

Fuse Links with striker

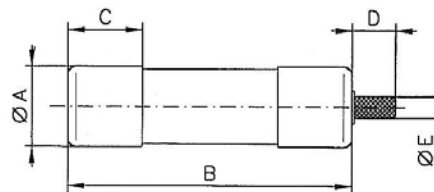

Size (mm)	A	B	C	D	E
14 x 51	14	51	13	8	4
22 x 58	22	58	16	8	4

For striker fuse link applications use CH141DMS or CH221DMS fuse holders with micro-switch auxiliary contacts.

# Cylindrical Fuse Links for Industrial Applications

## Class gG/gL, 0.5 to 125A, 400 to 690Vac

### Class gG/gL - Catalogue Numbers

Size (mm)	Current (A)	Catalogue Numbers Without Indicator	Catalogue Numbers With Indicator	Catalogue Numbers With Striker	Voltage (V)	Breaking Capacity (kA)		
8x31	0.5	C08G0.5	-	-	400V	20kA		
	1	C08G1	-	-				
	2	C08G2	C08G2I	-				
	4	C08G4	C08G4I	-				
	6	C08G6	C08G6I	-				
	8	C08G8	C08G8I	-				
	10	C08G10	C08G10I	-				
	12	C08G12	C08G12I	-				
	16	C08G16	C08G16I	-				
	20	C08G20	C08G20I	-				
25	C08G25	C08G25I	-					
10x38	0.5	C10G0.5	-	-	500V	120kA		
	1	C10G1	C10G1I	-				
	2	C10G2	C10G2I	-				
	4	C10G4	C10G4I	-				
	6	C10G6	C10G6I	-				
	8	C10G8	C10G8I	-				
	10	C10G10	C10G10I	-				
	12	C10G12	C10G12I	-				
	16	C10G16	C10G16I	-				
	20	C10G20	C10G20I	-				
25	C10G25	C10G25I	-					
32	C10G32	C10G32I	-	400V				
14x51	1	C14G1	C14G1I	-	690V	80kA		
	2	C14G2	C14G2I	C14G2S				
	4	C14G4	C14G4I	C14G4S				
	6	C14G6	C14G6I	C14G6S				
	8	C14G8	C14G8I	C14G8S				
	10	C14G10	C14G10I	C14G10S				
	12	C14G12	C14G12I	C14G12S				
	16	C14G16	C14G16I	C14G16S				
	20	C14G20	C14G20I	C14G20S				
	25	C14G25	C14G25I	C14G25S				
32	C14G32	C14G32I	C14G32S	500V	120kA			
40	C14G40	C14G40I	C14G40S	400V				
50	C14G50	C14G50I	C14G50S					
22x58	2	C22G2	C22G2I	-	690V	80kA		
	4	C22G4	C22G4I	C22G4S				
	6	C22G6	C22G6I	C22G6S				
	8	C22G8	C22G8I	C22G8S				
	10	C22G10	C22G10I	C22G10S				
	12	C22G12	C22G12I	C22G12S				
	16	C22G16	C22G16I	C22G16S				
	20	C22G20	C22G20I	C22G20S				
	25	C22G25	C22G25I	C22G25S				
	32	C22G32	C22G32I	C22G32S				
	40	C22G40	C22G40I	C22G40S				
	50	C22G50	C22G50I	C22G50S				
	63	C22G63	C22G63I	C22G63S				
	80	C22G80	C22G80I	C22G80S				
100	C22G100	C22G100I	C22G100S	500V	120kA			
125	C22G125	C22G125I	C22G125S	400V				