

# NDC Series Drives



## INTRODUCTION

- Series of ministepped bipolar chopper drives, suitable for driving medium power two-phase stepping motors, with four, six or eight terminals.
- Compact, easy to use and cost effective solution. This system is designed for easy mounting inside a metallic electrical cabinet.
- Target: medium and medium-low power applications without special configuration requirement, but needing great dynamic performance, high reliability, low acoustic noise and mechanic vibrations reduction.

## HIGHLIGHTS

- Microstepping function up to 4.000 step/rev.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction at low and medium speed.
- Separated connectors for logic signals and power connections.
- Optoisolated and differential input and output signals ease interfacing with the most commonly used control systems.

Series	Model	V <sub>DC</sub> range (Volt)	I <sub>NP</sub> min. (Peak value) (Amp)	I <sub>NP</sub> max. (Peak value) (Amp)	Dimensions (mm)
NDC	04 - 04.V*	24 to 75	0.6	2.0	101x94x25
NDC	06 - 06.V*	24 to 75	1.9	6.0	101x94x25
NDC	94	24 to 75	0.6	2.0	110x108x34
NDC	96	24 to 75	1.9	6.0	110x108x34


\* NDC 04.V and NDC 06.V versions are equipped with screw-type connectors.

## TECHNICAL FEATURES


- Range of operating voltages: 24-75 V<sub>DC</sub>.
- Range of current: 0.6-6.0 Amp. Setting up to eight possible values by means of dip-switches.
- Microstepping: 400, 800, 1.600, 3.200 and 500, 1.000, 2.000, 4.000 steps /revolution. Setting by means of dip-switches.
- Automatic current reduction at motor standstill.
- Protections:
  - Protection against under-voltage and over-voltage.
  - Protection against a short-circuit at motor outputs.
  - Overtemperature protection with thermal sensor.
- Optoinsulated inputs compatible with differential control signals.
- Possibility to switch off motor current with an external logic signal.
- High efficiency CHOPPER with MOSFET final stage output.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction at low and medium speed.
- Available a version with built-in oscillator, with speed range from 14 to 450 rpm. Setting by means of dip-switches.
- Version: boxed/open frame, equipped with crimp-type or screw-type connectors. Maximum compactness.
- Warranty: 24 months.



## POWER AND LOGIC CONNECTIONS

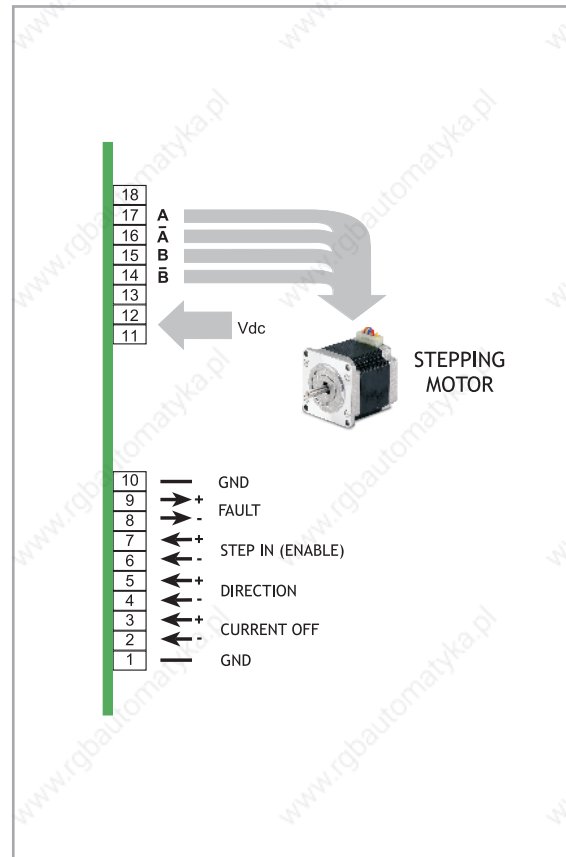

## MECHANICAL DIMENSIONS

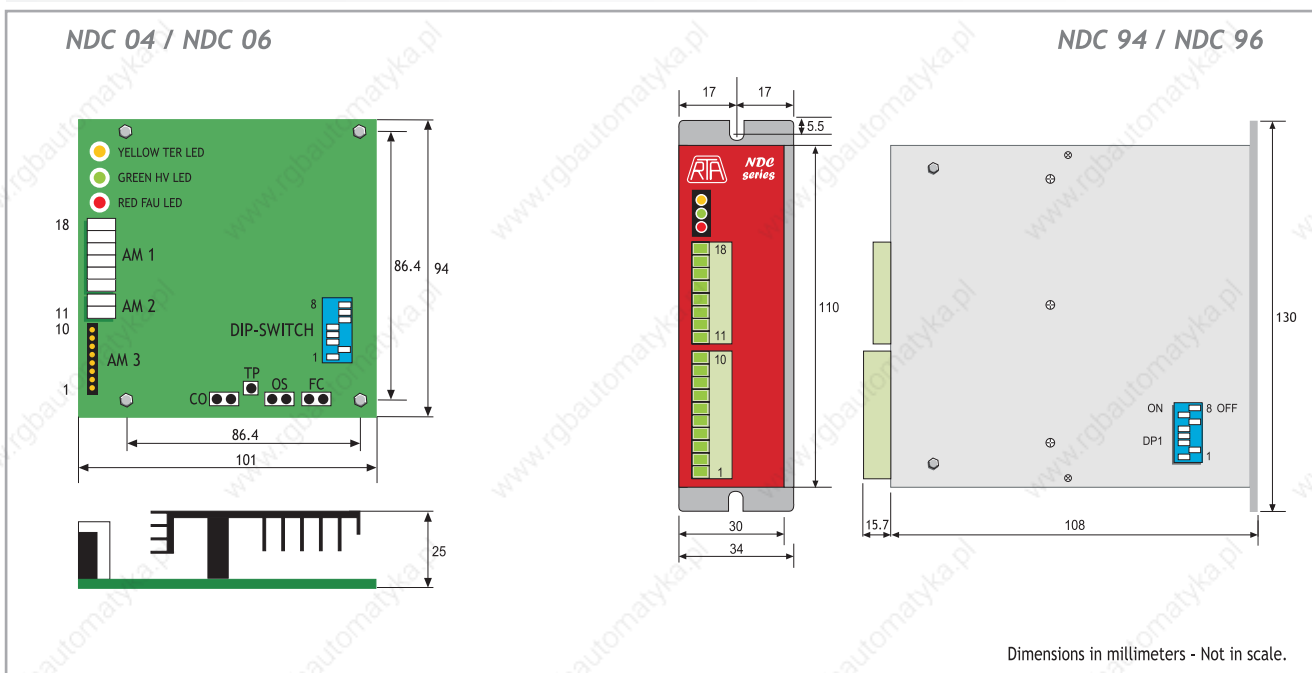

R.T.A. s.r.l.  
Via E. Mattei - Fraz. Divisa  
27020 MARCIGNAGO (PV) ITALY  
Tel. +39.0382.929.855 - Fax +39.0382.929.150  
www.rta.it

R.T.A. Deutschland GmbH  
Bublitzstraße 34  
40599 DÜSSELDORF (Germany)  
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66  
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.  
C/Generalitat 22, 1° 3°  
08850 GAVA - BARCELONA (Spain)  
Tel. +34.936.388.805 - Fax +34.936.334.595  
www.rta-iberica.es

© R.T.A. s.r.l. PAVIA (Italy) CAE - 06 - 14

INTRODUCTION

STEP & DIRECTION

ADVANCED

ANALOG INPUT

PROGRAMMABLE

EtherCAT

CANopen