


**T9G series, DC coil 30A PCB Relay**

- n 30A switching in NO and 20A in CO
- n Minimum Board space (29mm x 21.5mm)
- n Meets UL 508 for clearance / creepage
- n Meets IEC 61810-1 for reinforced insulation
- n Option for load connections via 0.250" (6.3mm) quick connect terminals
- n 4kV dielectric withstand and 8kV surge voltage between coil & contacts
- n UL approved for 480 VAC switching

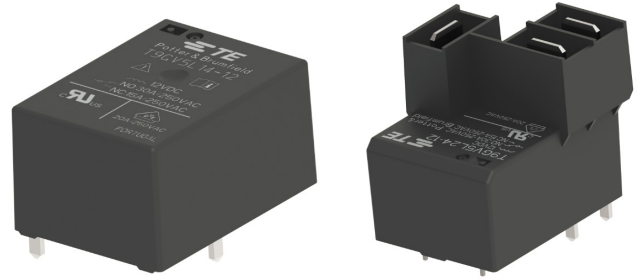

Typical applications  
HVAC, Appliances, Industrial Controls, Energy Management

**Approvals**

UL 508; UL Listing #E214025  
IEC 61810-1; VDE Listing #40045012  
Technical data of approved types on request

**Contact Data**

Contact arrangement	1 form A (NO), 1 form B (NC), 1 form C (CO)		
Rated voltage	250VAC		
Max. switching voltage	480VAC		
Rated current	30A	20A	20A
Contact material	AgSnO		
Min. recommended contact load	1A, 12VAC/VDC		
Initial contact resistance	300mΩ at 100mA/6VDC		
Frequency of operation, with/without load	360 cycles / hour = with 3600 cycles / hour = without		
Operate/release time max., including bounce	15/22ms		

**Contact ratings <sup>1)</sup>**

**UL 508**

Type	Load	Cycles
NO	5A, 480VAC, General Purpose	6x10 <sup>3</sup>
NO	15,6A, 480VAC, Resistive	100x10 <sup>3</sup>
NO	30A, 277VAC, General Purpose, 85°C	100x10 <sup>3</sup>
NO	18A, 250VAC, Resistive, 105°C	100x10 <sup>3</sup>
NO	22A, 250VAC, Resistive	250x10 <sup>3</sup>
NO	22A FLA, 98A LRA, 120VAC, Definite Purpose	100x10 <sup>3</sup>
NO	14A FLA, 82A LRA, 250VAC, Definite Purpose, 70°C	30x10 <sup>3</sup>
NO	20A, 277VAC, Standard Ballast	6x10 <sup>3</sup>
NO	1HP, 125VAC	100x10 <sup>3</sup>
NC	15A, 240VAC, General Purpose	100x10 <sup>3</sup>
NC	20A, 250VAC, Resistive (CO type only)	20x10 <sup>3</sup>
NC	30A LRA / 12A FLA, 250VAC, Definite Purpose	30x10 <sup>3</sup>
NC	1HP, 277VAC (CO type only)	50x10 <sup>3</sup>

**Contact ratings <sup>1)</sup> (continued)**

Type	Load	Cycles
CO	20A, 250VAC, Resistive	15x10 <sup>3</sup>
CO	20A / 10A, 240VAC, Resistive	100x10 <sup>3</sup>
CO	30A / 15A Resistive, 250VAC	20x10 <sup>3</sup>
CO	30A FLA / 80A LRA (N.O.); 12A FLA, 30A LRA (N.C.) 250VAC, Definite Purpose	30x10 <sup>3</sup>
CO	80A LRA / 10A FLA (N.O.); 33A LRA / 10A FLA (N.C.) 250VAC, Definite Purpose	30x10 <sup>3</sup>

**IEC 61810-1**

Type	Load	Cycles
NO	30A, 250VAC, Resistive, 85°C (PCB)	75x10 <sup>3</sup>
NO	20A, 250VAC, Resistive, 70°C (QC), 85°C (PCB)	100x10 <sup>3</sup>
NO	17A, 250VAC, Resistive, 105°C	100x10 <sup>3</sup>
NO	20A, 250VAC, Resistive, 85°C	100x10 <sup>3</sup>
NO	12A (12A), 250VAC, 60°C (per EN60730-1)	150x10 <sup>3</sup>
NC	10A, 250VAC, Resistive, 60°C (C.O. type only)	50x10 <sup>3</sup>
CO	20A, 250VAC, Resistive, 60°C (N.C.)	10x10 <sup>3</sup>
CO	20A/10A, 250VAC, Resistive, 60°C (N.O.)	50x10 <sup>3</sup>
CO	12A, 250VAC, Resistive, 85°C	100x10 <sup>3</sup>

<sup>1)</sup> Contact ratings at 40°C (unless otherwise noted) with relay properly vented. **Remove vent nib after soldering and cleaning.**

Mechanical endurance	10x10 <sup>6</sup> ops.
----------------------	-------------------------

**Coil Data**

Coil voltage range	5 to 110VDC
Max. coil power	110% of nominal
Max. coil temperature	155°C
Coil insulation system according UL	Class F

**Coil versions, DC coil**



Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
5	5	3.75	0.5	28	900
9	9	6.75	0.9	90	900
12	12	9	1.2	160	900
15	15	11.25	1.5	249	900
18	18	13.5	1.8	360	900
22	22	16.5	2.2	538	900
24	24	18	2.4	640	900
48	48	36	4.8	2,560	900
110	110	82.5	11	13,444	900

All figures are given for coil without preenergization, at ambient temperature +23°C.

<sup>1)</sup> Contact ratings at 40°C (unless otherwise noted) with relay properly vented. **Remove vent nib after soldering and cleaning.**


**T9G series, DC coil 30A PCB Relay** (Continued)

**Coil Data** (continued)

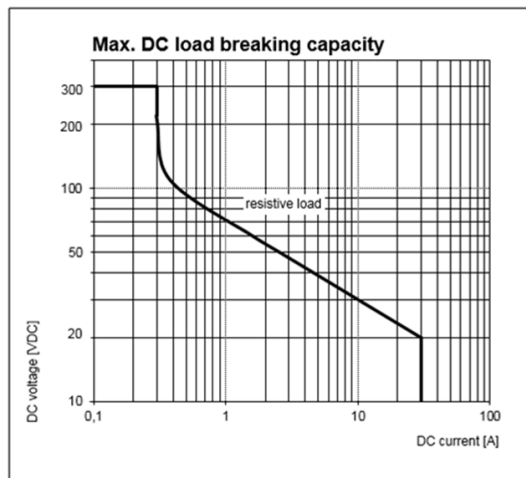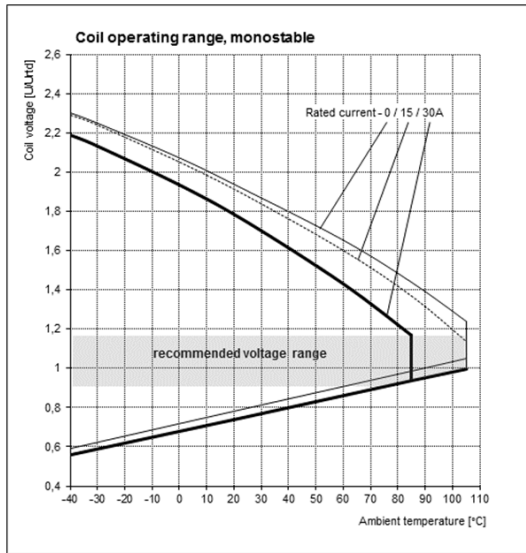


**PCB layout**

Bottom view on pins  
T9G - Mounting and termination code 1



Only necessary terminals are present on single throw models. Consequently, some holes will be unnecessary for single throw models.

T9G - Mounting and termination code 2



Only necessary terminals are present on single throw models. Consequently, some holes will be unnecessary for single throw models.

**Insulation Data**

Initial dielectric strength	
between open contacts	1500V <sub>rms</sub>
between contact and coil	4000V <sub>rms</sub>
Initial surge withstand voltage	
between contact and coil	8kV
Initial insulation resistance	
between insulated elements	1x10 <sup>9</sup> Ω, 500VDC
Clearance/creepage	
between contact and coil	6.4mm / 9.5mm (UL), 8mm / 8mm (IEC)

**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customer-support/rohssupportcenter](http://www.te.com/customer-support/rohssupportcenter)

Ambient temperature	
DC coil	Storage -55°C to +130°C Operating -40 to +105°C at reduced current
Category of environmental protection	
IEC 61810	RTII - flux proof RTIII - wash tight
Vibration resistance (functional)	Opening NO contact >10g Opening NC contact >7g
Shock resistance (functional)	10g for 11msec
Shock resistance (destructive)	100g
Terminal type	pcb-tht and pcb-tht + quick connect
Weight	18g mounting code 1 23g mounting code 2
Resistance to soldering heat THT	
IEC 60068-2-20	250°C
Packaging/unit	10/tube, 420/box (PCB + QC), 500/box (PCB)

