


Contents

3 Pole Contactors.....	2-2
4 Pole Contactors.....	2-20
Mini Contactors.....	2-37
Manual Motor Starters	2-42
Field Bus Plugs.....	2-49
Softstarters.....	2-54
Pilot Devices.....	2-58
Switching Power Supplies (CP Range)	2-72

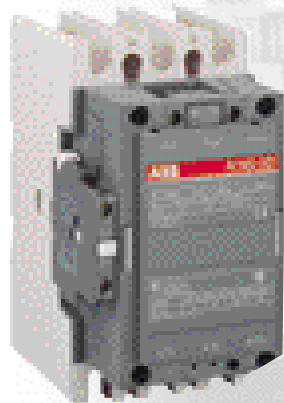

[Return to main index](#)


A., AF., 3-pole Contactors

a.c. Circuit Switching

Switching of 3-phase Cage Motors

AC-3 utilization category

When making, the motor current is about $6 \times I_N$.
Breaking while the motor is running at I_N motor F.L.C.



AC-3	Power rating	$\leq 55\text{ }^{\circ}\text{C}, 400\text{ V}$
AC-3	Rated operational current	$\leq 55\text{ }^{\circ}\text{C}, 400\text{ V}$ $\leq 55\text{ }^{\circ}\text{C}, 415\text{ V}$ $\leq 55\text{ }^{\circ}\text{C}, 690\text{ V}$


					
A9	A12	A16	A26	A30	A40

kW	4	5.5	7.5	11	15	18.5
A	9	12	17	26	32	37
A	9	12	17	26	32	37
A	7	9	10	17	21	25

Switching of Resistive Circuits

AC-1 utilization category

When making, the switched-on current is equal to the I_N load rated current with $\cos \phi \geq 0.95$.



AC-1	Rated operational current	$\leq 40\text{ }^{\circ}\text{C}$ $\leq 55\text{ }^{\circ}\text{C}$ $\leq 70\text{ }^{\circ}\text{C}$
With conductor cross-sectional area		mm ²
Rated operational voltage		V

A	25	27	30	45	55	60
A	22	25	27	40	55	60
A	18	20	23	32	39	42
mm ²	2.5	4	4	6	10	16
V	690					

3-pole contactors

Selection & Ordering

- Select contactor type.
- Select contactor coil voltage on cover folding page 0/1, according to control circuit supply. (Please quote coil voltage in plain text).

	a.c.	Control circuit supply	Types	A9-30-10 A12-30-10 A16-30-10	A26-30-10 A30-30-10 A40-30-10
	a.c. & d.c.	Control circuit supply (Electronic coil interface)	Types	-	-
	d.c.	Control circuit supply	Types	AE9-30-00 AE12-30-00 AE16-30-00	AE26-30-00 AE30-30-00 AE40-30-00

Contactor Main Accessories

Selection & Ordering

- Select accessory type and quote required data in plain text.

Auxiliary contacts		CA 5-..., 1-pole CAL 5-..., 2-pole	Types	CA 5-10 1-pole, front mounting CA 5-01 1-pole, front
Timers		TP..., Pneumatic TE..., Electronic Supply voltages: 24 V a.c./d.c., 110 ... 120; 220 ... 240; 380 ... 440 V a.c.	Types	TP 40 DA, TP 180 DA Direct timing - Front mounting TP 40 TE5S Direct timing - Inde
Interlocks		VE 5-., Mechanical / Electrical VM..., Mechanical mounting between 2 contactors	Types	VE 5-1 VM 5-1
Surge suppressors		RV..., (Varistor) a.c./d.c. RC..., (Capacitor) a.c.	Types	RV 5 RC 5-1

Protection of 3-phase motors

Selection & Ordering

- Select O/L relay type and setting range according to motor F.L.C.

O/L relays		TA..DU..., Thermal O/L relay E..DU..., Electronic O/L relay Standard starting time 2 ... 10 s tripping class 10 A	Types & setting range in Amps	TA 25 DU...		TA 42 DU...
				0.10...0.16 ¹ 0.16...0.25 0.25...0.40 0.40...0.63 0.63...1.0	1.0...1.4 ¹ 1.3...1.8 1.7...2.4 2.2...3.1 2.8...4.0	3.5...5.0 ¹ 4.5...6.5 6.0...8.5 7.5...11 10...14
Please consult us for electronic solution						

[Return to main index](#)