


Ratings and Specifications

Type		Standard	L-shaped	T-shaped, slot center 7 mm	Close-mounting		T-shaped, slot center 10 mm	F-shaped	R-shaped
NPN models	Connector models	EE-SX670 EE-SX670A EE-SX470	EE-SX671 EE-SX671A EE-SX471	EE-SX672 EE-SX672A EE-SX472	EE-SX673 EE-SX673A EE-SX473	EE-SX674 EE-SX674A EE-SX474	EE-SX675	EE-SX676	EE-SX677
	Pre-wired models	EE-SX670- WR	EE-SX671- WR	EE-SX672- WR	EE-SX673- WR	EE-SX674- WR	EE-SX675- WR	EE-SX676- WR	EE-SX677- WR
PNP models	Connector models	EE-SX670P EE-SX670R	EE-SX671P EE-SX671R	EE-SX672P EE-SX672R	EE-SX673P EE-SX673R	EE-SX674P EE-SX674R	EE-SX675P	EE-SX676P	EE-SX677P
	Pre-wired models	EE-SX670P- WR	EE-SX671P- WR	EE-SX672P- WR	EE-SX673P- WR	EE-SX674P- WR	EE-SX675P- WR	EE-SX676P- WR	EE-SX677P- WR
Item									
Sensing distance		5 mm (slot width)							
Sensing object		Opaque: 2 × 0.8 mm min.							
Differential distance		0.025 mm							
Light source		Infrared LED with a peak wavelength of 940 nm							
Indicator *1		Light indicator (red) (turns ON when light is interrupted for models with A or R suffix)							
Supply voltage		5 to 24 VDC ±10%, ripple (p-p): 10% max.							
Current consumption		12 mA max. (Connector models, L terminal open), 35 mA max. (NPN pre-wired models), 30 mA max. (PNP pre-wired models)							
Control output		NPN open collector: 5 to 24 VDC, 100 mA max. 100 mA load current with a residual voltage of 0.8 V max. 40 mA load current with a residual voltage of 0.4 V max. OFF current (leakage current): 0.5 mA max. PNP open collector: 5 to 24 VDC, 50 mA max. 50 mA load current with a residual voltage of 1.3 V max. OFF current (leakage current): 0.5 mA max.							
Protection circuits		Load short circuit protection (Connector models), No circuit protection (Pre-wired models)							
Response frequency *2		1 kHz min. (3 kHz average)							
Ambient illumination		1,000 lx max. with fluorescent light on the surface of the receiver.							
Ambient temperature range		Operating: -25 to +55°C, Storage: -30 to +80°C (with no icing or condensation)							
Ambient humidity range		Operating: 5% to 85%, Storage: 5% to 95% (with no icing or condensation)							
Vibration resistance		Destruction: 20 to 2,000 Hz (peak acceleration: 100 m/s ²) 1.5-mm double amplitude for 2 h (4-min periods) each in X, Y, and Z directions							
Shock resistance		Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions							
Degree of protection		IEC60529 IP50							
Connecting method		Connector Models (direct soldering possible), Pre-wired Models (Standard cable length: 1 m), Models with Connectors (Standard cable length: 0.1 m)							
Wei- ght	Connector models	Approx. 3.1 g	Approx. 3 g	Approx. 2.4 g	Approx. 2.3 g	Approx. 3 g	Approx. 2.7 g	Approx. 2.2 g	Approx. 2.2 g
	Pre-wired models	Approx. 18.9 g	Approx. 17.3 g	Approx. 17.8 g	Approx. 16.8 g	Approx. 17.1 g	Approx. 18.3 g	Approx. 16.9 g	Approx. 16.9 g
Ma- teri- al	Case	Polybutylene phthalate (PBT)							
	Cover	Polycarbonate							
Emitter/receiver									

*1. The indicator is a GaP red LED (peak wavelength: 690 nm).


*2. The response frequency was measured by detecting the rotating disk shown at the right.

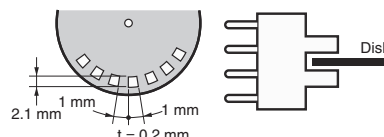

Engineering Data (Reference Value)


Sensing Position Characteristics

EE-SX47□/67□

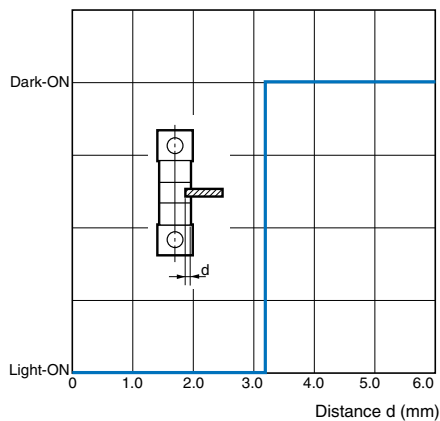


Sensing Position Characteristics

EE-SX47□/67□

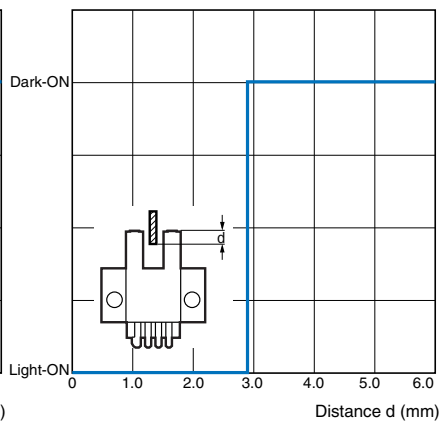

Repeated Sensing Position Characteristics

EE-SX47□/67□

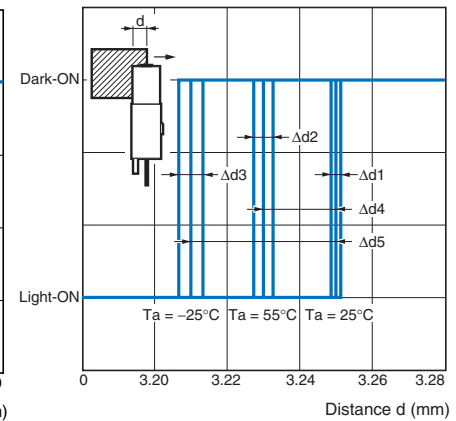

$V_{CC} = 12\text{ V}$, No. of repetitions: 20, $\Delta d_1 = 0.002\text{ mm}$, $\Delta d_2 = 0.004\text{ mm}$, $\Delta d_3 = 0.005\text{ mm}$, $\Delta d_4 = 0.02\text{ mm}$, $\Delta d_5 = 0.04\text{ mm}$

Note: The data applies to dark status. Operation may be affected by external light interference or light coming through the sensing object.

I/O Circuit Diagrams

NPN Output

Model	Output configuration	Timing charts	Terminal connections	Output circuit
EE-SX67□ EE-SX67□-WR	Light-ON	Incident Interrupted Light indicator (red) ON Output transistor ON Load Operates (e.g., relay) Releases	Short-circuited between ① terminal and positive ⊕ terminal	EE-SX67□ EE-SX67□A
	Dark-ON	Incident Interrupted Light indicator (red) OFF Output transistor OFF Load Operates (e.g., relay) Releases	Open between ① terminal and positive ⊕ terminal *1 *2	
EE-SX670A EE-SX671A EE-SX672A EE-SX673A EE-SX674A	Light-ON	Incident Interrupted Light indicator (red) ON Output transistor ON Load Operates (e.g., relay) Releases	Short-circuited between ① terminal and positive ⊕ terminal	EE-SX67□-WR
	Dark-ON	Incident Interrupted Light indicator (red) OFF Output transistor ON Load Operates (e.g., relay) Releases	Open between ① terminal and positive ⊕ terminal *1 *2	
EE-SX470 EE-SX471 EE-SX472 EE-SX473 EE-SX474	Light-ON	Incident Interrupted Light indicator (red) OFF Output transistor ON Load Operates (relay) Releases	---	

*1. Do not connect the L terminal to 0 V when using dark-ON operation.

*2. If you do not use the L terminal wire ((2) pink) when you use a Connector with Cable for an EE-1006 or EE-1010-series Photomicrosensor, noise may affect the Photomicrosensor. To prevent the effects of noise, cut the unused L terminal wire at the base of the connector and wrap it with insulating tape to prevent it from coming in contact with other terminals.