

Now available  
Class I  
Div 2

# 6mm Hazardous Location Interface Relays - RV8H Series

## Screw Terminals



Top view with  
Marking Plate

Only 70mm from DIN rail!

## Spring Clamp Terminals



Top view without  
Marking Plate

Only 70mm from DIN rail!

## Key Features

- Class I, Division 2 and Class I, Zone 2 hazardous locations
- Space-saving 6mm width
- Only 70mm in height from DIN rail
- Gold-plated contacts
- Pre-assembled relay and DIN mount socket
- Universal screw terminals (flat and Phillips) or Spring clamp terminals
- Universal AC/DC socket with built-in surge suppression and green LED
- 6A contact rating
- Lever for easy locking and removal of relay
- Wide input voltage range: 6 to 240V
- High dielectric strength and impulse withstand voltages
- Operating Temperature: -40C ~ +70C
- Reverse Polarity protected
- 400V AC maximum switching voltage
- 1500VA maximum switching power
- RoHS compliant

## Specifications

|                                |   |  |
|--------------------------------|---|--|
| Hazardous Location Rating      | Class I, Division2, Groups A, B, C, D T4A<br>Class I, Zone 2, AEx nA nC IIC T4<br>Class I, Zone 2, Ex nA nC IIC T4 X Gc<br>UL/c-UL Listed |  |
| Number of Poles                | 1 pole  |  |
| Contact Configuration          | 1 form C (SPDT)   |  |
| Contact material               | AgNi (Au plating)   |  |
| Degree of Protection           | IP20  |  |
| Dielectric strength            | Between contact and coil  | 4,000V AC for 1min   |
|                                | Between pole  | 1,000V AC for 1min   |
| Vibration Resistance           | Operating extremes  | NO: Frequency 10 to 55Hz, Amplitude 0.5mm<br>NC: Frequency 10 to 55Hz, Amplitude 0.2mm |
|                                | Damage limits   |  |
| Shock Resistance               | Operating extremes  | NO: 49m/s <sup>2</sup> (5G)<br>NC: 29.4m/s <sup>2</sup> (3G)                           |
|                                | Damage limits   | 980m/s <sup>2</sup> (10G)  |
| Mechanical Life (without load) | Over 10,000,000 operations<br>(operation frequency 18,000 operations per hour)  |  |
| Operating Temperature          | -40 to +70°C without freezing<br>(-40 to +55°C for AD110 and AD220 coil voltages)   |  |
| Operating Humidity             | 5 to 85% (without condensation)   |  |
| Weight (approx.)               | 30g (RV8H-L), 26g (RV8H-S)  |  |



(when using combination of  
RV relay and SV socket)

## Part Numbers

### Complete Part Numbers (Relay & Socket) and Replacement Relay



|              |             | Screw Terminals   |                          |   |                          | Spring Clamp Terminals  |                          |   |                          |
|--------------|-------------|---|--------------------------|---|--------------------------|---|--------------------------|---|--------------------------|
|              |             | Complete Unit   |                          | Relay Only  |                          | Complete Unit   |                          | Relay Only  |                          |
|              |             |  |                          |  |                          |  |                          |  |                          |
|              |             |   |                          | <b>New</b>  |                          |   |                          | <b>New</b>  |                          |
| Coil voltage |             | Standard  |                          | Hazardous Location (Class I Div 2)  |                          | Standard  |                          | Hazardous Location (Class I Div 2)  |                          |
|              |             | Complete Part Number  | Replacement (Relay Only) | Complete Part Number  | Replacement (Relay Only) | Complete Part Number  | Replacement (Relay Only) | Complete Part Number  | Replacement (Relay Only) |
| DC           | 6V          | RV8H-L-D6   | RV1H-G-D5                | RV8H-L-D6-C1D2  | RV1H-G-D5-C1D2           | RV8H-S-D6   | RV1H-G-D5                | RV8H-S-D6-C1D2  | RV1H-G-D5-C1D2           |
|              | 9V          | RV8H-L-D9   | RV1H-G-D9                | RV8H-L-D9-C1D2  | RV1H-G-D9-C1D2           | RV8H-S-D9   | RV1H-G-D9                | RV8H-S-D9-C1D2  | RV1H-G-D9-C1D2           |
|              | 12V         | RV8H-L-D12  | RV1H-G-D12               | RV8H-L-D12-C1D2   | RV1H-G-D12-C1D2          | RV8H-S-D12  | RV1H-G-D12               | RV8H-S-D12-C1D2   | RV1H-G-D12-C1D2          |
|              | 18V         | RV8H-L-D18  | RV1H-G-D18               | RV8H-L-D18-C1D2   | RV1H-G-D18-C1D2          | RV8H-S-D18  | RV1H-G-D18               | RV8H-S-D18-C1D2   | RV1H-G-D18-C1D2          |
|              | 24V         | RV8H-L-D24  | RV1H-G-D24               | RV8H-L-D24-C1D2   | RV1H-G-D24-C1D2          | RV8H-S-D24  | RV1H-G-D24               | RV8H-S-D24-C1D2   | RV1H-G-D24-C1D2          |
| AC/DC        | 12V         | RV8H-L-AD12   | RV1H-G-D12               | RV8H-L-AD12-C1D2  | RV1H-G-D12-C1D2          | RV8H-S-AD12   | RV1H-G-D12               | RV8H-S-AD12-C1D2  | RV1H-G-D12-C1D2          |
|              | 18V         | RV8H-L-AD18   | RV1H-G-D18               | RV8H-L-AD18-C1D2  | RV1H-G-D18-C1D2          | RV8H-S-AD18   | RV1H-G-D18               | RV8H-S-AD18-C1D2  | RV1H-G-D18-C1D2          |
|              | 24V         | RV8H-L-AD24   | RV1H-G-D24               | RV8H-L-AD24-C1D2  | RV1H-G-D24-C1D2          | RV8H-S-AD24   | RV1H-G-D24               | RV8H-S-AD24-C1D2  | RV1H-G-D24-C1D2          |
|              | 48V         | RV8H-L-AD48   | RV1H-G-D48               | RV8H-L-AD48-C1D2  | RV1H-G-D48-C1D2          | RV8H-S-AD48   | RV1H-G-D48               | RV8H-S-AD48-C1D2  | RV1H-G-D48-C1D2          |
|              | 60V         | RV8H-L-AD60   | RV1H-G-D60               | RV8H-L-AD60-C1D2  | RV1H-G-D60-C1D2          | RV8H-S-AD60   | RV1H-G-D60               | RV8H-S-AD60-C1D2  | RV1H-G-D60-C1D2          |
|              | 110V - 125V | RV8H-L-AD110  | RV1H-G-D60               | RV8H-L-AD110-C1D2   | RV1H-G-D60-C1D2          | RV8H-S-AD110  | RV1H-G-D60               | RV8H-S-AD110-C1D2   | RV1H-G-D60-C1D2          |
|              | 220V - 240V | RV8H-L-AD220  | RV1H-G-D60               | RV8H-L-AD220-C1D2   | RV1H-G-D60-C1D2          | RV8H-S-AD220  | RV1H-G-D60               | RV8H-S-AD220-C1D2   | RV1H-G-D60-C1D2          |

## Accessories

| Description  | Color | Part Number |
|--|-------|-------------|
| Jumper (20 combs <sup>Note 1</sup> )<br>  | Black | SV9Z-J20B   |
|  | Gray  | SV9Z-J20W   |
|  | Blue  | SV9Z-J20S   |
| Rated current: 6A <sup>Note 2</sup><br>Spacer (circuit separator) <sup>Note 3</sup><br> | -     | SV9Z-SA2W   |
| Screwdriver<br>   | -     | BC1S-SD0    |

- Jumper combs come with 20 points, if shorter lengths are needed simply cut off the excess points.
- Ensure that the total current to the jumper does not exceed the overall rated current.
- Width of spacer: 2mm
- When using a cut jumper, please use a spacer on the cut side. For additional information see instruction sheet.

## Marking Plates (Blank and Pre-marked)

| Item  | Part Number       | Engraving |
|---|-------------------|-----------|
|   | SV9Z-PW10         | blank     |
| <br>Vertical Orientation   | SV9Z-PW10-⊙1-10   | 1-10      |
|   | SV9Z-PW10-⊙11-20  | 11-20     |
|   | SV9Z-PW10-⊙21-30  | 21-30     |
|   | SV9Z-PW10-⊙31-40  | 31-40     |
|   | SV9Z-PW10-⊙41-50  | 41-50     |
|   | SV9Z-PW10-⊙51-60  | 51-60     |
|   | SV9Z-PW10-⊙61-70  | 61-70     |
| <br>Horizontal Orientation | SV9Z-PW10-⊙71-80  | 71-80     |
|   | SV9Z-PW10-⊙81-90  | 81-90     |
|   | SV9Z-PW10-⊙91-100 | 91-100    |
|   | SV9Z-PW10-⊙A-J    | A-J       |
|   | SV9Z-PW10-⊙K-T    | K-T       |
|   | SV9Z-PW10-⊙U-Z    | U-Z       |
|   | SV9Z-PW10-⊙GROUND | ⏚         |
| SV9Z-PW10-⊙AC   | ⏚                 |           |

- In place of ⊙ insert orientation code: V=Vertical, H=Horizontal
- Each unit has 10 pieces (marking plates).

## Coil Ratings


| Rated Voltage | Rated Current<br>+15% (mA) | Circuit<br>AC Resistance<br>+10% ( $\Omega$ ) | Circuit<br>DC Resistance<br>+10% ( $\Omega$ ) | Operating Characteristics |                    |                              | Power<br>Consumption |       |
|---------------|----------------------------|---|---|---------------------------|--------------------|------------------------------|----------------------|-------|
|               |                            |   |   | Pickup<br>Voltage         | Dropout<br>Voltage | Maximum<br>Allowable voltage |                      |       |
| DC            | 6V                         | 35  | -   | 170                       | 90% max            | 7% min                       | 110%                 | 0.21W |
|               | 9V                         | 18.6  | -   | 485                       |                    |                              |                      | 0.2W  |
|               | 12V                        | 14.6  | -   | 820                       |                    |                              |                      | 0.2W  |
|               | 18V                        | 11.6  | -   | 1550                      |                    |                              |                      | 0.2W  |
|               | 24V                        | 10.6  | -   | 2270                      |                    |                              |                      | 0.25W |
| AC/DC         | 12V                        | 15.5  | 755   | 800                       |                    |                              | 110%                 | 0.2W  |
|               | 18V                        | 13.3  | 1365  | 1345                      |                    |                              |                      | 0.25W |
|               | 24V                        | 13.7  | 1730  | 1790                      |                    |                              |                      | 0.33W |
|               | 48V                        | 4   | 11880   | 12230                     |                    |                              |                      | 0.2W  |
|               | 60V                        | 3.4   | 17600   | 17910                     |                    |                              |                      | 0.2W  |
|               | 110V - 125V                | 3.4 - 3.9                                     | 31790 - 31890                                 | 32450 - 32900             | 0.5W               |                              |                      |       |
|               | 220V - 240V                | 3.3 - 3.6                                     | 65670 - 66070                                 | 65940 - 68570             | 0.85W              |                              |                      |       |

## Contact Rating


|                              |                |                       |
|------------------------------|----------------|-----------------------|
| Max. Allowable Contact Power | Resistive load | 1500VA, 180W DC       |
| Rated Load                   | Resistive load | 250V AC 6A, 30V DC 6A |
| Allowable Switching Current  |                | 6A                    |
| Allowable Switching Voltage  |                | 400V AC, 125V DC      |
| Allowable Switching Power    |                | 1500VA, 180W DC       |
| Minimum Applicable Load      |                | 6V DC/10mA            |

## RV1H Relay


### Contact Ratings

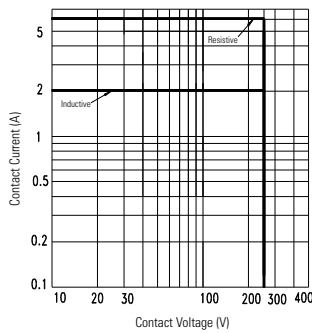

### Maximum Switching Power AC

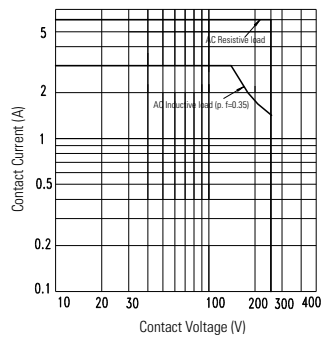

### Maximum Switching Power DC

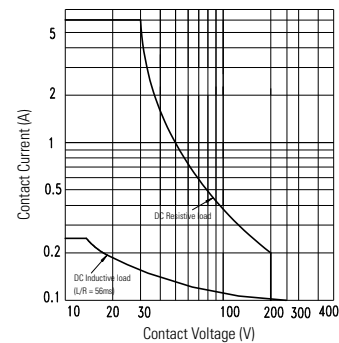


800.262.4332

[www.IDEC.com/relays](http://www.IDEC.com/relays)


## Dimensions (mm)

RV1H-G Relay

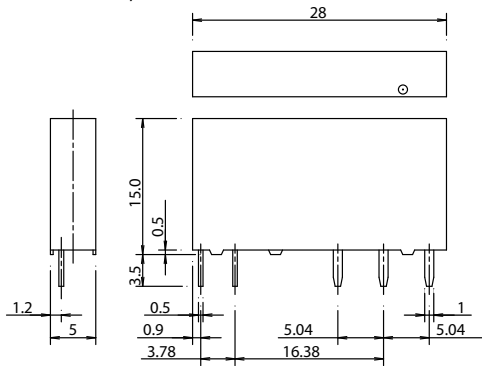


Note: Drawings are not to scale.


SV1H-07L Screw Terminals

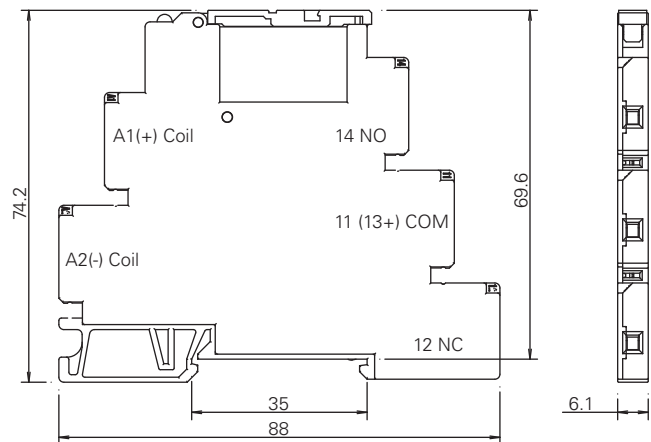


SV9Z-SA2W

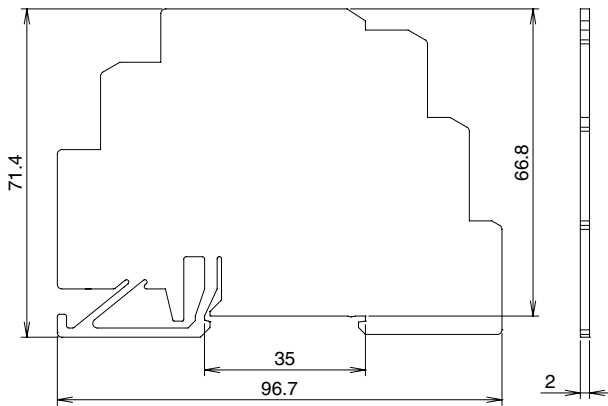

RV8H-S Spring Clamp Terminals

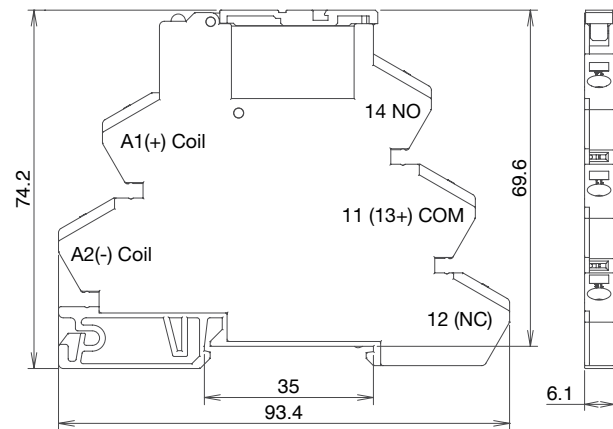


SV9Z-PW10\*

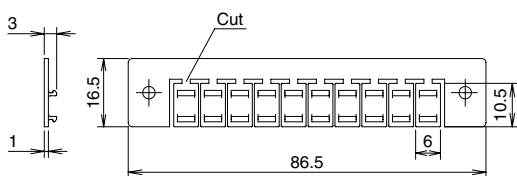


\* Available blank or pre-marked.

SV9Z-J20\*

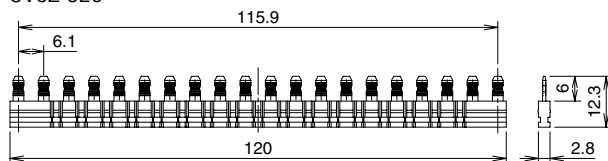

\* Available in black, gray and blue.

Marking Plate Placement

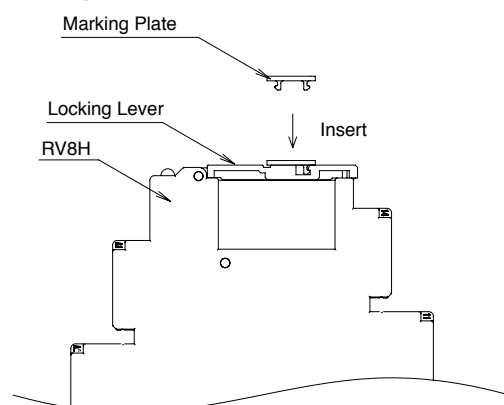

## Internal Connection (bottom view)

