




The MiCS-2714 is a compact MOS sensor.

The MiCS-2714 is a robust MEMS sensor for nitrogen dioxide and leakage detection.




Features

- Smallest footprint for compact designs (5 x 7 x 1.55 mm)
- Robust MEMS sensor for harsh environments
- High-volume manufacturing for low-cost applications
- Short lead-times

Detectable gases

- | | | |
|--------------------|-----------------|--------------|
| • Nitrogen dioxide | NO ₂ | 0.05 – 10ppm |
| • Hydrogen | H ₂ | 1 – 1000ppm |

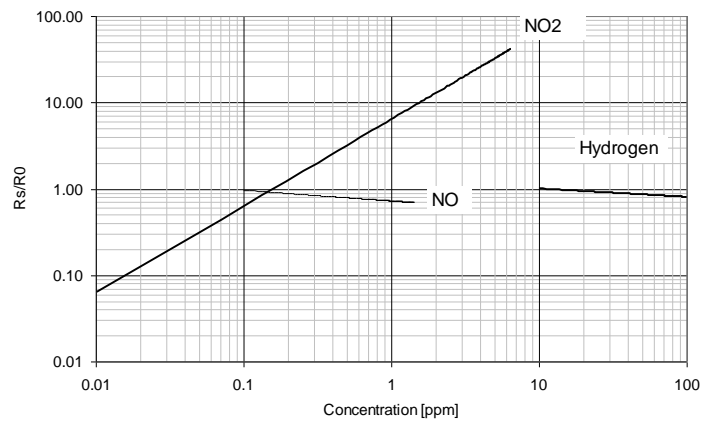

Continuous power ON, 25°C, 50% RH

For more information please contact:

info.em@sgxsensortech.com

SGX Sensortech, Courtils 1
CH-2035 Corcelles-Cormondrèche
Switzerland

www.sgxsensortech.com

Performance sensor

| Characteristic OX sensor | Symbol | Typ | Min | Max | Unit |
|---|----------|-----|------|-----|-----------|
| Sensing resistance in air (see note 1) | R_0 | - | 0.8 | 20 | $k\Omega$ |
| Typical NO ₂ detection range | FS | | 0.05 | 10 | ppm |
| Sensitivity factor (see note 2) | S_{60} | - | 2 | - | - |

Notes:

1. Sensing resistance in air R_0 is measured under controlled ambient conditions, i.e. synthetic air at 23 ±5°C and 50 ± 10% RH. Sampling test.
2. Sensitivity factor is defined as R_s at 0.25 ppm NO₂, divided by R_s in air. Test conditions are 23 ± 5°C and ≤5% RH. Indicative values only. Sampling test.

IMPORTANT PRECAUTIONS:

Read the following instructions carefully before using the MiCS-2714 described here to avoid erroneous readings and to prevent the device from permanent damage.

- The sensor must be reflow soldered in a neutral atmosphere, without soldering flux vapours.
- The sensor must not be exposed to high concentrations of organic solvents, silicone vapours or cigarette-smoke in order to avoid poisoning the sensitive layer.
- Heater voltage above the specified maximum rating will destroy the sensor due to overheating.
- This sensor is to be placed in a filtered package that protects it against water and dust projections.
- SGX sensortech strongly recommends using ESD protection equipment to handle the sensor.