


Cylindrical Proximity Sensor E2A

Safe Mounting with Greater Sensing Distance

- Ensures a sensing distance approximately 1.5 to 2 times larger than that of any conventional OMRON Sensor.
- Problems such as the collision of workpieces are eliminated.
- Full range of standard sizes (M8, M12, M18 and M30; both long and short barrels)
- Modular construction simplifies customization.

<READ AND UNDERSTAND THIS CATALOG>

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

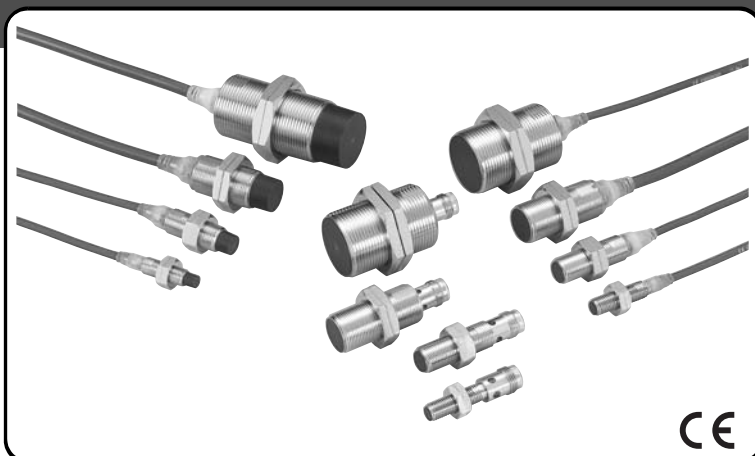

Ordering Information

Size		Sensing distance	Connection	Body material	Thread length (overall length)	Output configuration	Operation mode NO	Operation mode NC
M8	Shielded	2.0 mm	Pre-wired	Stainless steel	27 (40)	PNP	E2A-S08KS02-WP-B1 2M	E2A-S08KS02-WP-B2 2M
						NPN	E2A-S08KS02-WP-C1 2M	E2A-S08KS02-WP-C2 2M
					49 (62)	PNP	E2A-S08LS02-WP-B1 2M	E2A-S08LS02-WP-B2 2M
						NPN	E2A-S08LS02-WP-C1 2M	E2A-S08LS02-WP-C2 2M
			M12 connector	Stainless steel	27 (43)	PNP	E2A-S08KS02-M1-B1	E2A-S08KS02-M1-B2
						NPN	E2A-S08KS02-M1-C1	E2A-S08KS02-M1-C2
					49 (65)	PNP	E2A-S08LS02-M1-B1	E2A-S08LS02-M1-B2
						NPN	E2A-S08LS02-M1-C1	E2A-S08LS02-M1-C2
				Brass	27 (43)	PNP	E2A-M08KS02-M1-B1	E2A-M08KS02-M1-B2
						NPN	E2A-M08KS02-M1-C1	E2A-M08KS02-M1-C2
					49 (65)	PNP	E2A-M08LS02-M1-B1	E2A-M08LS02-M1-B2
						NPN	E2A-M08LS02-M1-C1	E2A-M08LS02-M1-C2
			M8 connector (3-pin)	Stainless steel	27 (39)	PNP	E2A-S08KS02-M5-B1	E2A-S08KS02-M5-B2
						NPN	E2A-S08KS02-M5-C1	E2A-S08KS02-M5-C2
					49 (61)	PNP	E2A-S08LS02-M5-B1	E2A-S08LS02-M5-B2
						NPN	E2A-S08LS02-M5-C1	E2A-S08LS02-M5-C2
	Non-shielded	4.0 mm	Pre-wired	Stainless steel	27 (40)	PNP	E2A-S08KN04-WP-B1 2M	E2A-S08KN04-WP-B2 2M
						NPN	E2A-S08KN04-WP-C1 2M	E2A-S08KN04-WP-C2 2M
					49 (62)	PNP	E2A-S08LN04-WP-B1 2M	E2A-S08LN04-WP-B2 2M
						NPN	E2A-S08LN04-WP-C1 2M	E2A-S08LN04-WP-C2 2M
			M12 connector	Stainless steel	27 (43)	PNP	E2A-S08KN04-M1-B1	E2A-S08KN04-M1-B2
						NPN	E2A-S08KN04-M1-C1	E2A-S08KN04-M1-C2
					49 (65)	PNP	E2A-S08LN04-M1-B1	E2A-S08LN04-M1-B2
						NPN	E2A-S08LN04-M1-C1	E2A-S08LN04-M1-C2
				Brass	27 (43)	PNP	E2A-M08KN04-M1-B1	E2A-M08KN04-M1-B2
						NPN	E2A-M08KN04-M1-C1	E2A-M08KN04-M1-C2
					49 (65)	PNP	E2A-M08LN04-M1-B1	E2A-M08LN04-M1-B2
						NPN	E2A-M08LN04-M1-C1	E2A-M08LN04-M1-C2
			M8 connector (3-pin)	Stainless steel	27 (39)	PNP	E2A-S08KN04-M5-B1	E2A-S08KN04-M5-B2
						NPN	E2A-S08KN04-M5-C1	E2A-S08KN04-M5-C2
					49 (61)	PNP	E2A-S08LN04-M5-B1	E2A-S08LN04-M5-B2
						NPN	E2A-S08LN04-M5-C1	E2A-S08LN04-M5-C2

Size		Sensing distance	Connection	Body material	Thread length (overall length)	Output configuration	Operation mode NO	Operation mode NC	
M12	Shielded	4.0 mm	Pre-wired	Brass	34 (50)	PNP	E2A-M12KS04-WP-B1 2M	E2A-M12KS04-WP-B2 2M	
						NPN	E2A-M12KS04-WP-C1 2M	E2A-M12KS04-WP-C2 2M	
					56 (72)	PNP	E2A-M12LS04-WP-B1 2M	E2A-M12LS04-WP-B2 2M	
						NPN	E2A-M12LS04-WP-C1 2M	E2A-M12LS04-WP-C2 2M	
			M12 connector	Brass	34 (48)	PNP	E2A-M12KS04-M1-B1	E2A-M12KS04-M1-B2	
						NPN	E2A-M12KS04-M1-C1	E2A-M12KS04-M1-C2	
					56 (70)	PNP	E2A-M12LS04-M1-B1	E2A-M12LS04-M1-B2	
						NPN	E2A-M12LS04-M1-C1	E2A-M12LS04-M1-C2	
	Non-shielded	8.0 mm	Pre-wired	Brass	34 (50)	PNP	E2A-M12KN08-WP-B1 2M	E2A-M12KN08-WP-B2 2M	
						NPN	E2A-M12KN08-WP-C1 2M	E2A-M12KN08-WP-C2 2M	
					56 (72)	PNP	E2A-M12LN08-WP-B1 2M	E2A-M12LN08-WP-B2 2M	
						NPN	E2A-M12LN08-WP-C1 2M	E2A-M12LN08-WP-C2 2M	
			M12 connector	Brass	34 (48)	PNP	E2A-M12KN08-M1-B1	E2A-M12KN08-M1-B2	
						NPN	E2A-M12KN08-M1-C1	E2A-M12KN08-M1-C2	
					56 (70)	PNP	E2A-M12LN08-M1-B1	E2A-M12LN08-M1-B2	
						NPN	E2A-M12LN08-M1-C1	E2A-M12LN08-M1-C2	
M18	Shielded	8.0 mm	Pre-wired	Brass	39 (59)	PNP	E2A-M18KS08-WP-B1 2M	E2A-M18KS08-WP-B2 2M	
						NPN	E2A-M18KS08-WP-C1 2M	E2A-M18KS08-WP-C2 2M	
					61 (81)	PNP	E2A-M18LS08-WP-B1 2M	E2A-M18LS08-WP-B2 2M	
						NPN	E2A-M18LS08-WP-C1 2M	E2A-M18LS08-WP-C2 2M	
			M12 connector	Brass	39 (53)	PNP	E2A-M18KS08-M1-B1	E2A-M18KS08-M1-B2	
						NPN	E2A-M18KS08-M1-C1	E2A-M18KS08-M1-C2	
					61 (75)	PNP	E2A-M18LS08-M1-B1	E2A-M18LS08-M1-B2	
						NPN	E2A-M18LS08-M1-C1	E2A-M18LS08-M1-C2	
	Non-shielded	16.0 mm	Pre-wired	Brass	39 (59)	PNP	E2A-M18KN16-WP-B1 2M	E2A-M18KN16-WP-B2 2M	
						NPN	E2A-M18KN16-WP-C1 2M	E2A-M18KN16-WP-C2 2M	
					61 (81)	PNP	E2A-M18LN16-WP-B1 2M	E2A-M18LN16-WP-B2 2M	
						NPN	E2A-M18LN16-WP-C1 2M	E2A-M18LN16-WP-C2 2M	
			M12 connector	Brass	39 (53)	PNP	E2A-M18KN16-M1-B1	E2A-M18KN16-M1-B2	
						NPN	E2A-M18KN16-M1-C1	E2A-M18KN16-M1-C2	
					61 (75)	PNP	E2A-M18LN16-M1-B1	E2A-M18LN16-M1-B2	
						NPN	E2A-M18LN16-M1-C1	E2A-M18LN16-M1-C2	
M30	Shielded	15.0 mm	Pre-wired	Brass	44 (64)	PNP	E2A-M30KS15-WP-B1 2M	E2A-M30KS15-WP-B2 2M	
						NPN	E2A-M30KS15-WP-C1 2M	E2A-M30KS15-WP-C2 2M	
					66 (86)	PNP	E2A-M30LS15-WP-B1 2M	E2A-M30LS15-WP-B2 2M	
						NPN	E2A-M30LS15-WP-C1 2M	E2A-M30LS15-WP-C2 2M	
			M12 connector	Brass	44 (58)	PNP	E2A-M30KS15-M1-B1	E2A-M30KS15-M1-B2	
						NPN	E2A-M30KS15-M1-C1	E2A-M30KS15-M1-C2	
					66 (80)	PNP	E2A-M30LS15-M1-B1	E2A-M30LS15-M1-B2	
						NPN	E2A-M30LS15-M1-C1	E2A-M30LS15-M1-C2	
	Non-shielded	20.0 mm	Pre-wired	Brass	44 (64) (See note.)	PNP	E2A-M30KN20-WP-B1 2M	E2A-M30KN20-WP-B2 2M	
						NPN	E2A-M30KN20-WP-C1 2M	E2A-M30KN20-WP-C2 2M	
					30.0 mm	66 (86)	PNP	E2A-M30LN30-WP-B1 2M	E2A-M30LN30-WP-B2 2M
							NPN	E2A-M30LN30-WP-C1 2M	E2A-M30LN30-WP-C2 2M
		20.0 mm	M12 connector	Brass	44 (58) (See note.)	PNP	E2A-M30KN20-M1-B1	E2A-M30KN20-M1-B2	
						NPN	E2A-M30KN20-M1-C1	E2A-M30KN20-M1-C2	
					30.0 mm	66 (80)	PNP	E2A-M30LN30-M1-B1	E2A-M30LN30-M1-B2
							NPN	E2A-M30LN30-M1-C1	E2A-M30LN30-M1-C2

Note: M30 non-shielded Models with double sensing distance and short barrels cannot be mounted due to the necessary separation distance from the surrounding metal. Standard sensing models are thus available.