

Electrode Holder BF-□(R)/BS-1(T)

CSM_BF-□(R)/BS-1(T)_DS_E_8_3

Complete Lineup for Use in High-temperature, High-pressure Environments or Where Exposed to Chemicals

- The BF-1 is ideal for liquids with low specific resistance, such as wastewater.
- The BF-□(R) is used when a strong mounting is required.
- The BS-1 is used when high-temperature, high-pressure resistant is required.
- The BS-1T is used when corrosion resistance is required.



! Refer to *Safety Precautions for Electrodes and Electrode Holders*.

Ordering Information

■ Electrode Holders

Application	Model
<ul style="list-style-type: none"> • Liquid with low specific resistance For 1-pole electrode 	BF-1
<ul style="list-style-type: none"> • When sturdy mounting is required For 3-pole electrode For 3-pole electrode (2-wire) For 5-pole electrode For 5-pole electrode (2-wire) 	BF-3 BF-3R BF-5 BF-5R
<ul style="list-style-type: none"> • Applications where resistance to high-temperature, high-pressure is required For 1-pole electrodes, 250°C, 1.96 MPa 	BS-1 BS-1S BS-1S-1 BS-1S2
<ul style="list-style-type: none"> • High-pressure application where resistance to corrosion is required For 1-pole electrode, SUS304 981 kPa For 1-pole electrode, SUS316 981 kPa For 1-pole electrode, Titanium 981 kPa For 1-pole electrode, HAS B 981 kPa For 1-pole electrode, HAS C 981 kPa 	BS-1T SUS304 BS-1T SUS316 BS-1T TITANIUM BS-1T HAS B BS-1T HAS C

■ Accessories (Order Separately)


Application	Model
Protective Cover (For PS-□S and BF-3/5)	F03-11
Protective Cover (For BS-1, BS-1S and BS-1T)	F03-19
M18 Nut (For BS-1)	F03-17
M18 Nut (For BS-1T)	F03-18

Note: Refer to *Installing an Electrode Holder on a Tank* under Level Controller Installation in the Technical Guide for Level Controllers for information on Level Controller installation. Refer to *PS-□S(R) Electrode Holder Accessories (Order Separately)* for dimensions.

Specifications

Item	Model	BF-1	BF-3 (R) (See note 1.)	BF-5 (R) (See note 1.)	BS-1	BS-1T
No. of Electrodes		1	3	5	---	---
Insulator material		PPS resin (Metallic section is SUS.)			Fluorocarbon polymer (PFA)	
Insulation resistance		100 MΩ				
Operating temperature		Electrode section: -10 to 150°C (with no icing) Terminal section: -10 to 70°C (with no icing or condensation)			250°C max.	180°C max.
Operating pressure		Atmospheric pressure			1.96 MPa (See note 2.)	981 kPa (See note 2.)
Applications		Liquids with low specific resistance, such as wastewater and cloudy water	General applications for purified water and wastewater		Boiler water level detection or high-temperature tanks	Acid or alkaline solution level detection

- Note:** 1. Two-wire Electrode Holders (R models) have a built-in resistance of 6.8 kΩ. They should be used with the Two-wire 61F Controllers.
2. There must be a sufficient ambient temperature in a high-pressure environment to prevent vapor leakage. Use the Electrode Holder according to the following pressure-temperature curve.

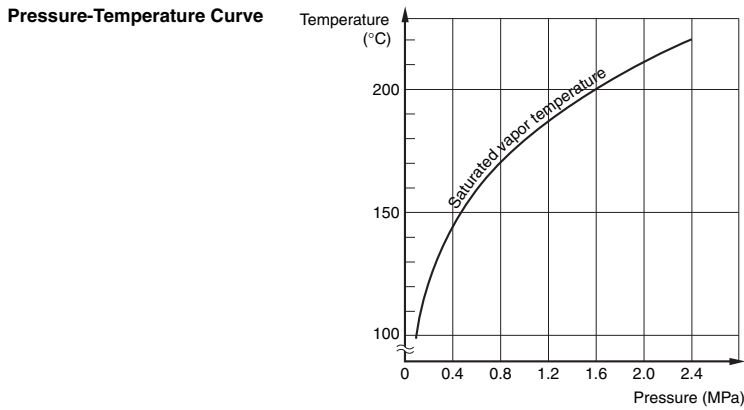

Example
For a pressure of 1.6 MPa, the temperature inside the water tank must be at least 200°C.

Appearance

<p>BF-1</p> <p>Tightening torque: 2.25 N·m</p> <p>Heat resistance: 70°C</p> <p>Heat resistance: 150°C</p>	<p>BF-3(R) BF-5(R)</p> <p>Tightening torque: 2.25 N·m</p> <p>Heat resistance: 70°C</p> <p>Heat resistance: 150°C</p> <p>(See note 1.)</p>	<p>BS-1</p> <p>Maximum terminal tightening torque: 137.2 N·cm</p> <p>Heat resistance: 150°C</p> <p>Heat resistance: 250°C</p> <p>Material at clamping section: iron (standard) SUS304 and SUS316 are also available. (See note 2.)</p>	<p>BS-1T</p> <p>SUS</p> <p>HAS Titanium</p> <p>(See note 3.)</p>
--	--	---	---

Note: 1. The F03-11 Protective Cover (sold separately) is available.
2.

Model	Material at tightening section	Screws
BS-1	Iron	M18 P = 1.5
BS-1S	SUS304	M18 P = 1.5
BS-1S-1	SUS304	PT1/2
BS-1S2	SUS316	M18 P = 1.5

3. Clamp screws are not provided for HAS B, HAS C, or titanium Electrode Holders. When placing an order, specify the type of material from the following five: SUS304, SUS316, HAS B, HAS C, or Titanium.


Accessories Required for Connecting Electrodes to the BF-□(R) (Order Separately)

Electrode Shorter than 1 m

The following items are required for each pole.

- 1 × F03-01 Electrode
- 1 × F03-03 Lock Nut

The Electrode can be cut anywhere to a desired control level.



Note: 1. The spring washer comes with the lock nut. Contact your OMRON representative to purchase a replacement if the spring washer wears out or is lost.
2. Refer to F03-□ for details on Electrodes, Connecting Nuts, Lock Nuts, and Separators.

Electrode Longer than 1 m

The following items are required for every additional meter of electrode for each pole.

- 1 × F03-01 Electrode
- 1 × F03-02 Connecting Nut
- 2 × F03-03 Lock Nuts

Use F03-14 1P Separators to prevent the electrodes from touching each another.

