8BVI0440HWSS.000-1

1 General information

- Clearly structured, straightforward implementation via network-based safety technology
- Modular expandability through virtual wiring
- Immediate triggering of safety function thanks to short cycle times
- Easy implementation with transparent control and status information in the standard application as well
- Compact design

2 Order data

Model number	Short description	Figure
	Wall mounting	
8BVI0440HWSS.000-1	ACOPOSmulti inverter unit, 44 A, HV, wall mounting, SafeMC EnDat 2.2	
	Required accessories	
	Terminal block sets	
8BZVI0440SS.000-1A	Screw clamp set for ACOPOSmulti 8BVI0440HxSS and 8BVI0440HxSA modules: 1x 8TB2108.2010-00, 1x 8TB2104.203L-00, 1x 8TB4104.204G-10	
	Optional accessories	
	Fan modules	
8BXF001.0000-00	ACOPOSmulti fan module, replacement fan for ACOPOSmulti modules (8BVP / 8B0C / 8BVI / 8BVE / 8B0K)	
	Plug-in modules	
8BAC0120.000-1	ACOPOSmulti plug-in module, EnDat 2.1 interface	
8BAC0120.001-2	ACOPOSmulti plug-in module, EnDat 2.2 interface	
8BAC0121.000-1	ACOPOSmulti plug-in module, HIPERFACE interface	
8BAC0122.000-1	ACOPOSmulti plug-in module, resolver interface 10 kHz	
8BAC0123.000-1	ACOPOSmulti plug-in module, incremental encoder and SSI absolute encoder interface for RS422 signals	
8BAC0123.001-1	ACOPOSmulti plug-in module, incremental encoder interface for 5 V single-ended and 5 V differential signals	
8BAC0123.002-1	ACOPOSmulti plug-in module, incremental encoder interface for 24 V single-ended and 24 V differential signals	
8BAC0124.000-1	ACOPOSmulti plug-in module, SinCos interface	
8BAC0125.000-1	ACOPOSmulti plug-in module, SinCos EnDat 2.1/SSI interface	
8BAC0130.000-1	ACOPOSmulti plug-in module, 2 digital outputs, 50 mA, max. 62.5 kHz, 2 digital outputs, 500 mA, max. 1.25 kHz,2 digital inputs 24 VDC	
8BAC0130.001-1	ACOPOSmulti plug-in module, 2 digital outputs, 50 mA, max. 62.5 kHz, 4 digital outputs, 500 mA, max. 1.25 kHz	
8BAC0132.000-1	ACOPOSmulti input module, 4 analog inputs ±10 V	
8BAC0133.000-1	ACOPOSmulti plug-in module, 3 RS422 outputs for ABR encoder emulation, 1 Mhz	
	POWERLINK cables	
X20CA0E61.00020	POWERLINK connection cable, RJ45 to RJ45, 0.20 m	
X20CA0E61.00025	POWERLINK connection cable, RJ45 to RJ45, 0.25 m	
X20CA0E61.00030	POWERLINK connection cable, RJ45 to RJ45, 0.30 m	
X20CA0E61.00035	POWERLINK connection cable, RJ45 to RJ45, 0.35 m	
X20CA0E61.00050	POWERLINK connection cable, RJ45 to RJ45, 0.50 m	
X20CA0E61.00100	POWERLINK connection cable, RJ45 to RJ45, 1.00 m	
	Shield component sets	
8SCS002.0000-00	ACOPOSmulti shield component set: 1x clamping plate; 2x clamps D 4-13.5 mm; 4x screws	
8SCS007.0000-00	ACOPOSmulti shield component set: 1x shield mounting plate 2x 45°; 4x screws	
8SCS008.0000-00	ACOPOSmulti shield component set: 1x shield plate 2x type 0; 1x hose clamp, B 9 mm, D 23-35 mm	
8SCS010.0000-00	ACOPOSmulti shield component set: 1x ACOPOSmulti holding plate SK14-20; 1x shield terminal SK20	
	Terminal blocks	
8TB2104.203L-00	Screw clamp 4-pin, single row, spacing: 5.08 mm, label 3: T- T + B- B+, L coding: 1010	

Table 1: 8BVI0440HWSS.000-1 - Order data

Model number	Short description	Figure
8TB2108.2010-00	Screw clamp 8-pin, single row, spacing: 5.08 mm, label 1: numbered serially	
8TB4104.204G-10	Screw clamp 4-pin, single row, spacing: 10.16 mm, label 4: PE W V U, G coding: 0110	

Table 1: 8BVI0440HWSS.000-1 - Order data

3 Technical data

Product ID	8BVI0440HWSS.000-1
General information	
B&R ID code	0xAA20
Cooling and mounting method	Wall mounting
Slots for plug-in modules	2 [1]
Certification	
cULus	Yes
DC link connection	
Voltage	
Nominal	750 VDC
Continuous power consumption [2]	32.5 kW
Power loss depending on the switching frequency [3]	
Switching frequency 5 kHz	$[0.07*I_M^2+7.3*I_M+40]$ W
Switching frequency 10 kHz	$[0.2*I_M^2+11.1*I_M+130]$ W
Switching frequency 20 kHz	$[1.85*I_M^2+3.8*I_M+300]$ W
DC link capacitance	990 µF
Design	ACOPOSmulti backplane
24 VDC supply	
Input voltage	25 VDC ±1.6%
Input capacitance	32.9 µF
Max. power consumption	31 W + P_{SMC1} + P_{SLOT2} + $P_{24\ V\ Out}$ + $P_{HoldingBrake}$ + 2 * $P_{Fan8B0M...}$ [4]
Design	ACOPOSmulti backplane
24 VDC output	
Quantity	2
Output voltage	
DC link voltage (U_{DC}): 260 to 315 VDC	25 VDC * (U_{DC}/315)
DC link voltage (U_{DC}): 315 to 800 VDC	24 VDC ±6%
Fuse protection	250 mA (slow-blow) electronic, automatic reset
Motor connection [5]	
Quantity	1
Continuous power per motor connection [2]	32 kW
Continuous current per motor connection [2]	44 A_{eff}
Reduction of continuous current depending on the switching frequency [6]	
Switching frequency 5 kHz	1.57 A/K (from 40 °C) [7]
Switching frequency 10 kHz	0.5 A/K (from -10 °C) [8]
Switching frequency 20 kHz	0.36 A/K (from -77 °C) [8]
Reduction of continuous current depending on the altitude	
Starting at 500 m above sea level	4.4 A_{eff} per 1000 m
Peak current	88 A_{eff}
Nominal switching frequency	5 kHz
Possible switching frequencies [9]	5/10/20 kHz
Electrical stress of the connected motor in accordance with IEC TS 60034-25	Limit value curve A
Protective measures	
Overload protection	Yes
Short circuit and ground fault protection	Yes
Max. output frequency	600 Hz [10]
Design	
U, V, W, PE	Plug
Shield connection	Yes
Terminal connection cross section	
Flexible and fine wire lines	
With wire end sleeves	0.5 to 16 mm²
Approbation data	
UL/C-UL-US	20 to 6
CSA	20 to 6
Terminal cable cross section dimension of the shield connection	23 to 35 mm

Table 2: 8BVI0440HWSS.000-1 - Technical data

Product ID	8BVI0440HWSS.000-1
Max. motor line length depending on the switching frequency	
Switching frequency 5 kHz	25 m
Switching frequency 10 kHz	25 m
Switching frequency 20 kHz	25 m
Motor holding brake connection	
Quantity	1
Output voltage [11]	24 VDC +5.8% / -0% [12]
Continuous current	4.2 A
Max. internal resistance	0.15 Ω
Extinction potential	Approx. 30 V
Max. extinction energy per switching operation	3 Ws
Max. switching frequency	0.5 Hz
Protective measures	
Overload and short circuit protection	Yes
Open line monitoring	Yes
Undervoltage monitoring	Yes
Response threshold for open line monitoring	Approx. 0.5 A
Response threshold for undervoltage monitoring	24 VDC +0% / -4%
Encoder interfaces [13]	
Quantity	1
Type	EnDat 2.2 [14]
Connections	9-pin DSUB socket
Indicators	UP/DN LEDs
Electrical isolation	
Encoder - ACOPOSmulti	No
Encoder monitoring	Yes
Max. encoder cable length	100 m Depending on the cross section of the supply wires on the encoder cable [15]
Encoder supply	
Output voltage	Typ. 12.5 V
Load capability	350 mA
Protective measures	
Short circuit protection	Yes
Overload protection	Yes
Synchronous serial interface	
Signal transmission	RS485
Data transfer rate	6.25 Mbit/s
Max. power consumption per encoder interface	P_{SMC} [W] = 19 V * $I_{Encoder}$ [A] [16]
Trigger inputs	
Quantity	2
Wiring	Sink
Electrical isolation	
Input - Inverter module	Yes
Input - Input	No
Input voltage	
Nominal	24 VDC
Maximum	30 VDC
Switching threshold	
Low	<5 V
High	>15 V
Input current at nominal voltage	Approx. 10 mA
Switching delay	
Positive edge	52 µs ± 0.5 µs (digitally filtered)
Negative edge	53 µs ± 0.5 µs (digitally filtered)
Modulation compared to ground potential	Max. ±38 V
Operating conditions	
Permitted mounting orientations	
Hanging vertically	Yes
Lying horizontally	Yes
Standing horizontally	No
Installation at altitudes above sea level	
Nominal	0 to 500 m
Maximum [17]	4000 m
Degree of pollution in accordance with EN 60664-1	2 (non-conductive pollution)
Overvoltage category in accordance with IEC 60364-4-443:1999	III
Protection in accordance with EN 60529	IP20 [18]

Table 2: 8BVI0440HWSS.000-1 - Technical data

Product ID	8BVI0440HWSS.000-1
Environmental conditions	
Temperature	
Operation	
Nominal	5 to 40°C
Maximum [19]	55°C
Storage	-25 to 55°C
Transport	-25 to 70°C
Relative humidity	
Operation	5 to 85%
Storage	5 to 95%
Transport	Max. 95% at +40°C
Mechanical characteristics	
Dimensions [20]	
Width	106.5 mm
Height	317 mm
Depth	
Wall mounting	263 mm
Weight	Approx. 5.4 kg
Module width	2

Table 2: 8BVI0440HWSS.000-1 - Technical data

1) SLOT 1 of the ACOPOSmulti module is occupied by the encoder interface.
2) Valid in the following conditions: Bus voltage 750 VDC, switching frequency 5 kHz, 40°C ambient temperature, installation altitudes <500 m above sea level, no derating dependent on cooling type.
3) I_M ... Current on the motor connection [A].
4) P_{SMC1} ... Max. power consumption P_{SMC} [W] of the SafeMC module in SLOT1 (see the section "Encoder interfaces")
   P_{SLOT2} ... Max. power consumption P_{8BAC} [W] of the plug-in module in SLOT2 (see the technical data for the respective plug-in module)
   $P_{24\ V\ Out}$ ... Power [W] that is output to the connections X2/+24 V Out 1 and X2/+24 V Out 2 on the module (max. 10 W)
   $P_{Fan8B0M...}$ ... Portion of the power [W] that is used by the fan modules in the mounting plate or the 8B0M0040HFF0.000-1 fan module (see the technical data for the respective 8B0M... mounting plate / 8B0M0040HFF0.000-1 fan module)
5) B&R 8BCM motor cables must be used when cabling the motor connections.
6) Valid in the following conditions: DC bus voltage 750 VDC The temperature specifications are based on the ambient temperature.
7) Value for the nominal switching frequency.
8) The module cannot supply the full continuous current at this switching frequency. This unusual value for the ambient temperature, at which a derating of the continuous current must be accounted for, ensures that the derating of the continuous current can be determined in the same manner as at other switching frequencies.
9) B&R recommends operating the module at nominal switching frequency. Operating the module at a higher switching frequency for application-specific reasons reduces the continuous current and increases the CPU load.
10) The module's electrical output frequency (SCTRL_SPEED_ACT * MOTOR_POLEPAIRS) is monitored to protect against dual-use in accordance with EC 428/2009 | 3A225. If the electrical output frequency of the module exceeds the limit value of 600 Hz uninterrupted for more than 0.5 s, then the current motion is aborted and error 6060 is output (Power element: Limit speed exceeded).
11) During project development, it is necessary to check if the minimum voltage can be maintained on the holding brake with the specified wiring. The operating voltage range of the holding brake can be found in the user's manual for the respective motor.
12) The specified values is only valid under the following conditions:
   - The 24 VDC supply for the module is provided by an 8B0C auxiliary supply module installed on the same mounting plate.
   If the 24 VDC supply for the module is applied to the mounting plate using an 8BVE expansion module, then the output voltage is reduced because of voltage drops on the expansion cable. In this case, undervoltage monitoring must be deactivated.
13) B&R 8BCF EnDat 2.2 cables must be used when cabling the encoder interfaces.
14) An EnDat 2.2 functional safety encoder is required when using ACOPOSmulti with SafeMC! With standard EnDat 2.2 encoders, only the timing of the functions STO, SBC and SS1 is monitored!
15) The maximum encoder cable length l_{max} can be calculated as follows (the maximum permissible encoder length of 100 m must not be exceeded):

   $l_{max} = 7.9/I_G * A * 1/(2*\rho)$

   I_G ... Max. current consumption of the encoder [A]
   A ... Cross section of the supply wire [mm²]
   ρ ... Specific resistance [Ωmm²/m] (e.g. for copper: ρ = 0.0178)
16) $I_{Encoder}$ ... Max. power consumption of the connected encoder [A].
17) Continuous operation at altitudes ranging from 500 m to 4,000 m above sea level is possible (taking the continuous current reductions listed into consideration).
18) This value only applies with the factory settings (SLOT2 of the module is sealed by a slot cover shield plate). If SLOT2 on the module is not sealed, then the protection level is reduced to IP10. For this reason, we recommend only removing the slot cover shield plate if an ACOPOSmulti plug-in module is being used in SLOT2.
19) Continuous operation at ambient temperatures ranging from 40°C to max. 55°C is possible (taking the continuous current reductions listed into consideration), but results in a shorter lifespan.
20) The dimensions define the true device dimensions including the respective mounting plate. Make sure to leave additional space above and below the devices for mounting, connections and air circulation.

4 Dimension diagram and installation dimensions

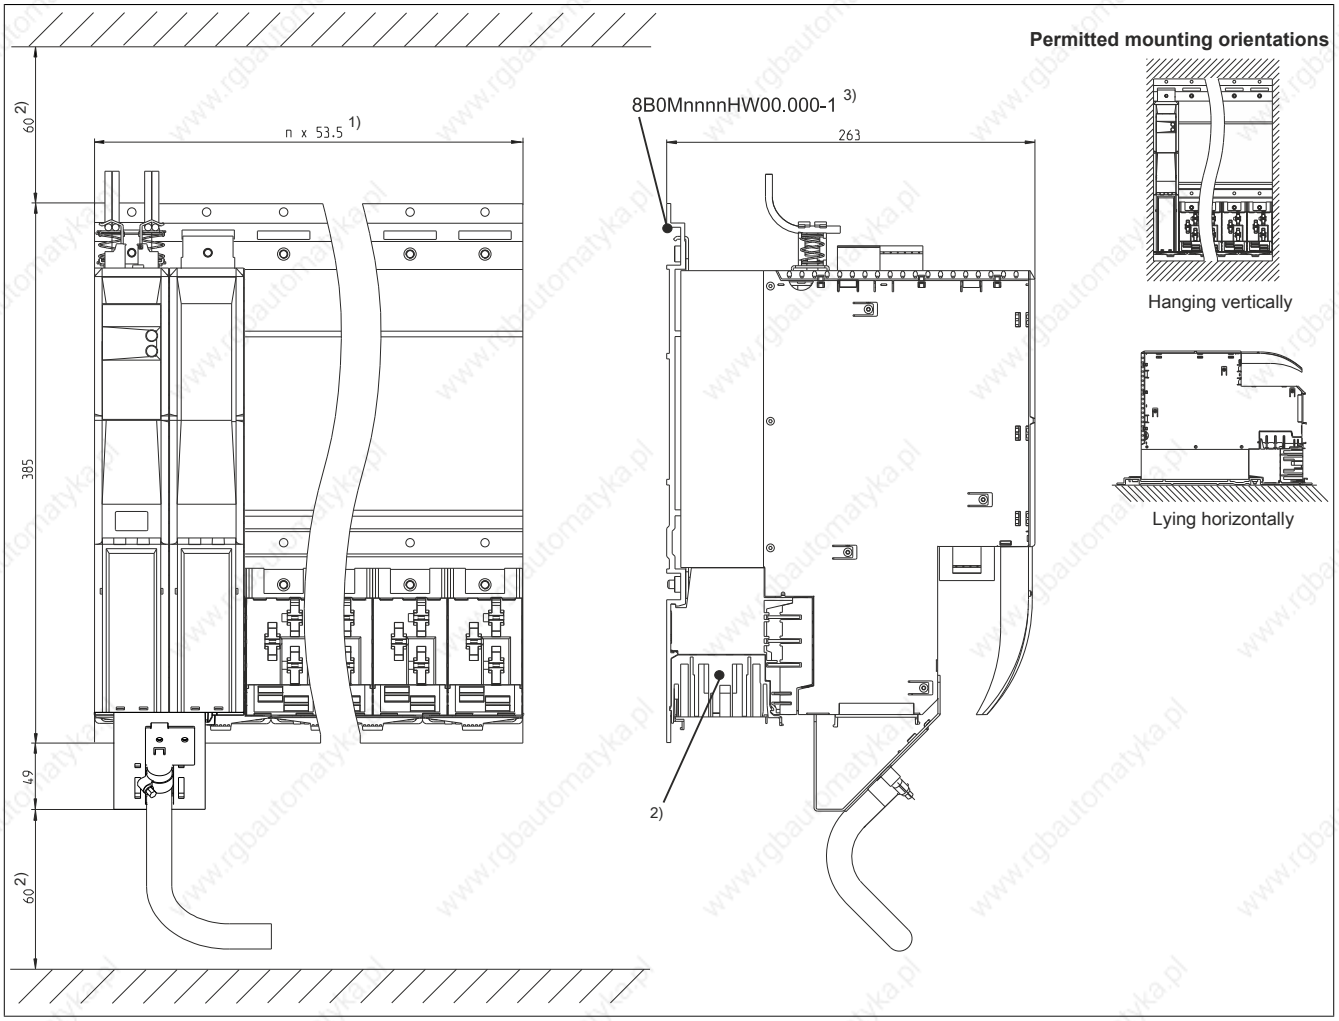

Figure 1: Dimension diagram and installation dimensions

1) n... Necessary width (slots) of the mounting plate.
2) For proper air circulation, at least 60 mm clearance must be available above and below the module.
To ensure that the fan modules in the mounting plate can be replaced easily, at least 250 mm clearance must be available below the module.
3) nnnn indicates the number of slots (e.g. 0160 refers to 16 slots).

5 Wiring: Safe double-width inverter modules (single-axis modules)

5.1 Overview of pin assignments

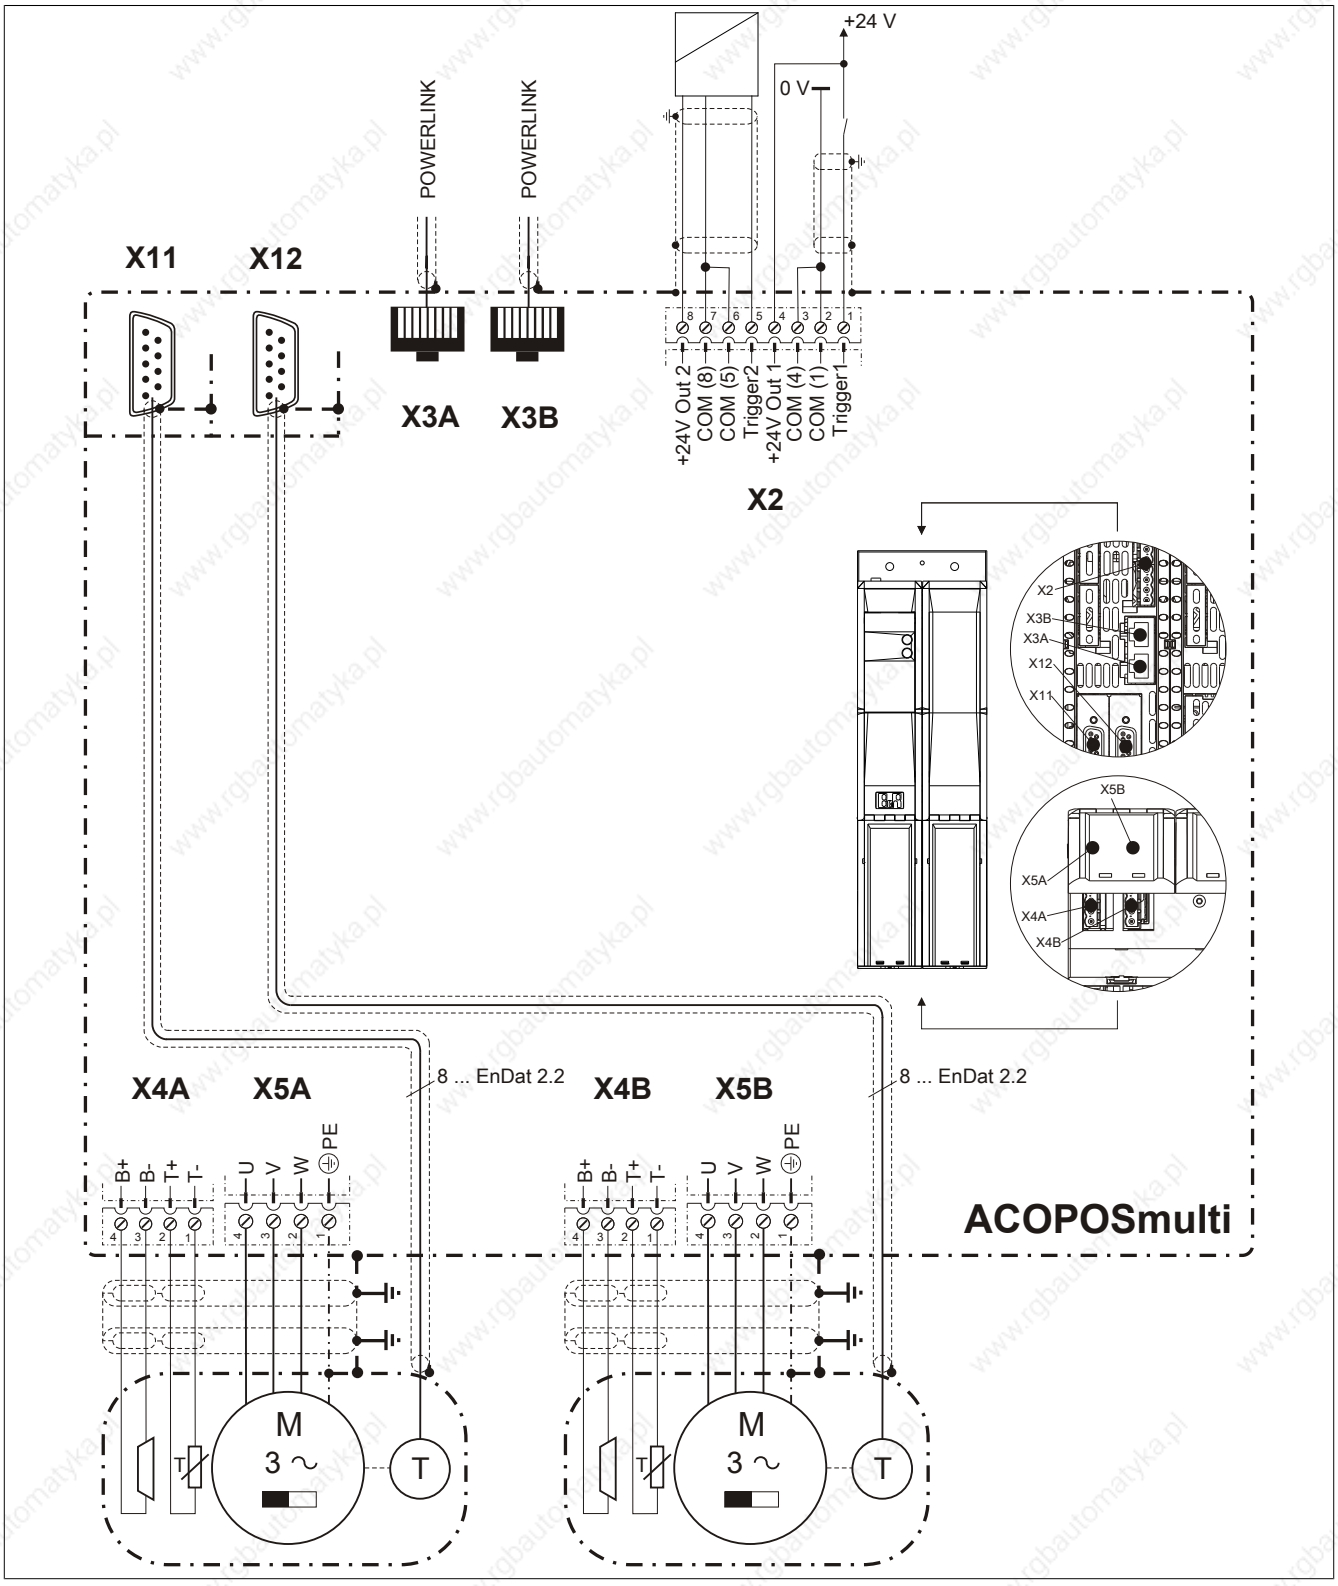

Figure 2: Overview of pin assignments

5.2 X2 connector - Pinout

X2	Pin	Name	Function
	1	Trigger 1	Trigger 1
	2	COM (1)	Trigger 1 0 V
	3	COM (2)	+24 V output 1 0 V
	4	+24V Out 1	+24 V output 1
	5	Trigger 2	Trigger 2
	6	COM (5)	Trigger 2 0 V
	7	COM (8)	+24 V output 2 0 V
	8	+24V Out 2	+24 V output 2

Table 3: X2 connector - Pinout

5.3 X3A, X3B connectors - Pinout

X3A, X3B	Pin	Name	Function
	1	RXD	Receive signal
	2	RXD\	Receive signal inverted
	3	TXD	Transmit signal
	4	Shield	Shield
	5	Shield	Shield
	6	TXD\	Transmit signal inverted
	7	Shield	Shield
	8	Shield	Shield

Table 4: X3A, X3B connectors - Pinout

5.4 X4A connector - Pinout

X4A	Name	Function
	T-	Axis 1: Temperature sensor -
	T+	Axis 1: Temperature sensor +
	B- [1)]	Axis 1: Brake -
	B+ [1)]	Axis 1: Brake +

Table 5: X4A connector - Pinout

1) Wiring is not permitted to exceed a total length of 3 m.

Danger!

The functional fail safe state is enabled if the SBC output B+ is shorted to 24V (i.e. safe pulse disabling is activated). However, the brake always remains on because of the short circuit to 24V!

This can lead to dangerous situations because the motor holding brake is not able to stop the coasting down movement!

Appropriate wiring measures must be implemented to ensure that the SBC output B+ is not shorted to 24V!

Danger!

The SBC output

- **is not permitted to be wired across multiple modules!**
- **is not permitted to be wired as an open emitter!**
- **is not permitted to be wired as an open collector!**

Information:

The transistors of the SBC output stage are tested cyclically. When the output channels are active, this test emits low pulses on the output with a maximum length of 600 µs.

This must be taken into consideration when choosing the motor holding brake!

Danger!

The connections for the motor temperature sensors and the motor holding brake are safely isolated circuits. These connections are therefore only permitted to be connected to devices or components that have sufficient isolation in accordance with IEC 60364-4-41 or EN 61800-5-1.

Caution!

If B+ and B- are swapped when connecting the permanent magnet holding brakes, then the brakes cannot be opened! ACOPOSmulti inverter modules cannot determine if a holding brake is connected with reverse polarity!

Warning!

Temperature sensors are only permitted to be connected to the X4A/T+ and X4A/T- connectors on an ACOPOSmulti module under the following conditions:

- **There is no ACOPOSmulti plug-in module in SLOT1 on the ACOPOSmulti module with a temperature sensor connected to T+ and T-.**

Otherwise, the temperature monitoring functions on the ACOPOSmulti module may become ineffective, which in extreme cases can cause the hardware (e.g. motors) connected to the ACOPOSmulti module to be destroyed!

5.5 X5A connector - Pinout

X5A	Name	Function
	⏚	Axis 1: Protective ground conductor
	W	Axis 1: Motor connection W
	V	Axis 1: Motor connection V
	U	Axis 1: Motor connection U

Table 6: X5A connector - Pinout

Warning!

B&R 8BCM motor cables must be used when cabling the motor connections.

5.6 Pinout - SafeMC module

Figure	X11 (X12)	Pin	Name	Function
		1	U+	Encoder supply +12.5 V
		2	---	---
		3	---	---
		4	D	Data input
		5	T	Clock output
		6	COM (1)	Encoder supply 0 V
		7	---	---
		8	D\	Data input inverted
		9	T\	Clock output inverted

Information:

The SafeMC module is only permitted to be used together with 8BCF EnDat 2.2 cables!

Note:

The SafeMC modules cannot be replaced! SafeMC modules and the corresponding inverter module form a single unit. In the event of an error, the entire inverter module must be replaced.