


Ratings and Specifications


Item	Type		Standard	L-shaped	T-shaped, slot center 7 mm	Close-mounting		T-shaped, slot center 10 mm	F-shaped	R-shaped
		NPN models	Connector models EE-SX670 EE-SX670A EE-SX470	EE-SX671 EE-SX671A EE-SX471	EE-SX672 EE-SX672A EE-SX472	EE-SX673 EE-SX673A EE-SX473	EE-SX674 EE-SX674A EE-SX474	EE-SX675	EE-SX676	EE-SX677
	Pre-wired models	EE-SX670-WR	EE-SX671-WR	EE-SX672-WR	EE-SX673-WR	EE-SX674-WR	EE-SX675-WR	EE-SX676-WR	EE-SX677-WR	
	PNP models	Connector models EE-SX670P EE-SX670R	EE-SX671P EE-SX671R	EE-SX672P EE-SX672R	EE-SX673P EE-SX673R	EE-SX674P EE-SX674R	EE-SX675P	EE-SX676P	EE-SX677P	
	Pre-wired models	EE-SX670P-WR	EE-SX671P-WR	EE-SX672P-WR	EE-SX673P-WR	EE-SX674P-WR	EE-SX675P-WR	EE-SX676P-WR	EE-SX677P-WR	
Sensing distance			5 mm (slot width)							
Sensing object			Opaque: 2 × 0.8 mm min.							
Differential distance			0.025 mm							
Light source			Infrared with a peak wavelength of 940 nm							
Indicator 1			Light indicator (red) (turns ON when light is interrupted for models with A or R suffix)							
Supply voltage			5 to 24 V, ripple (p-p): 10% max.							
Current consumption			12 mA max. (connector models, terminal open), 35 mA max. (pre-wired models), 30 mA max. (pre-wired models)							
Control output			open collector: 5 to 24 V, 100 mA max. 100 mA load current with a residual voltage of 0.8 V max. 40 mA load current with a residual voltage of 0.4 V max. OFF current (leakage current): 0.5 mA max. open collector: 5 to 24 V, 50 mA max. 50 mA load current with a residual voltage of 1.3 V max. OFF current (leakage current): 0.5 mA max.							
Protection circuits			Load short circuit protection (connector models), no circuit protection (pre-wired models)							
Response frequency 2			1 min. (3 ms average)							
Ambient illumination			1,000 lx max. with fluorescent light on the surface of the receiver.							
Ambient temperature range			Operating: -25 to 55°, Storage: -30 to 80° (with no icing or condensation)							
Ambient humidity range			Operating: 5% to 85%, Storage: 5% to 95% (with no icing or condensation)							
Vibration resistance			Destruction: 20 to 2,000 Hz (peak acceleration: 100 m/s ²) 1.5 mm double amplitude for 2 h (4 min periods) each in X, Y, and Z directions							
Shock resistance			Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions							
Degree of protection			IP 60529 50							
Connecting method			Connector models (direct soldering possible), pre-wired models (Standard cable length: 1 m), models with connectors (Standard cable length: 0.1 m)							
Weight	Connector models	pprox. 3.1 g	pprox. 3 g	pprox. 2.4 g	pprox. 2.3 g	pprox. 3 g	pprox. 2.7 g	pprox. 2.2 g	pprox. 2.2 g	
	Pre-wired models	pprox. 18.9 g	pprox. 17.3 g	pprox. 17.8 g	pprox. 16.8 g	pprox. 17.1 g	pprox. 18.3 g	pprox. 16.9 g	pprox. 16.9 g	
Material	Case	Polybutylene phthalate (PBT)								
	Cover	Polycarbonate								
	Emitter/receiver	Polycarbonate								

- The indicator is a red LED (peak wavelength: 690 nm).
- The response frequency was measured by detecting the rotating disc shown at the right.

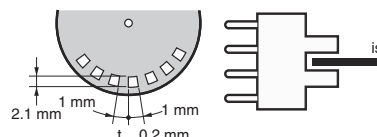


Engineering Data (Reference Value)


Sensing Position Characteristics

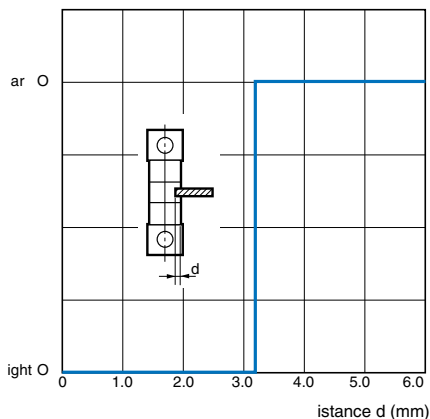

Sensing Position Characteristics

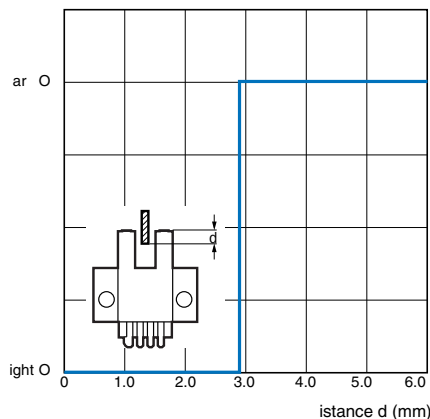

Repeated Sensing Position Characteristics

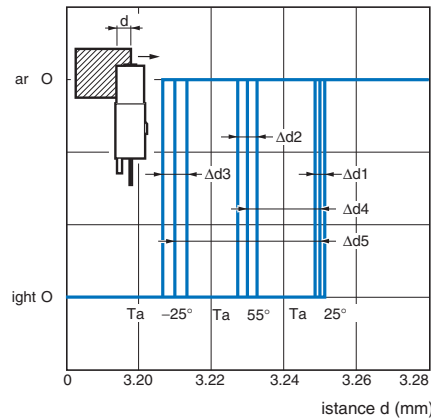

Vcc = 12 V, No. of repetitions: 20, Δd1 = 0.002 mm, Δd2 = 0.004 mm, Δd3 = 0.005 mm, Δd4 = 0.02 mm, Δd5 = 0.04 mm

Note: The data applies to dark status. Operation may be affected by external light interference or light coming through the sensing object.

I/O Circuit Diagrams

NPN Output

Model	Output configuration	Timing charts	Terminal connections	Output circuit
EE-SX67□ EE-SX67□-WR	Light-ON	Incident Interrupted light indicator (red) OFF Output transistor OFF load Operates (e.g., relay) Releases	Short-circuited between ○ terminal and positive ⊕ terminal	EE-SX67□ EE-SX67□A
	Dark-ON	Incident Interrupted light indicator (red) OFF Output transistor OFF load Operates (e.g., relay) Releases	Open between ○ terminal and positive ⊕ terminal *1 *2	
EE-SX670A EE-SX671A EE-SX672A EE-SX673A EE-SX674A	Light-ON	Incident Interrupted light indicator (red) OFF Output transistor OFF load Operates (e.g., relay) Releases	Short-circuited between ○ terminal and positive ⊕ terminal	EE-SX67□-WR
	Dark-ON	Incident Interrupted light indicator (red) OFF Output transistor OFF load Operates (e.g., relay) Releases	Open between ○ terminal and positive ⊕ terminal *1 *2	
EE-SX470 EE-SX471 EE-SX472 EE-SX473 EE-SX474	Light-ON	Incident Interrupted light indicator (red) OFF Output transistor OFF load Operates (rela.) Releases	---	

*1. Do not connect the L terminal to 0 V when using dark-ON operation.

*2. If you do not use the L terminal wire ((2) pink) when you use a Connector with Cable for an EE-1006 or EE-1010-series Photomicrosensor, noise may affect the Photomicrosensor. To prevent the effects of noise, cut the unused L terminal wire at the base of the connector and wrap it with insulating tape to prevent it from coming in contact with other terminals.