



OFICJALNY DYSTRYBUTOR

RGB ELEKTRONIKA AGACIAK CIACIEK SP.J.
ul. Jana Długosza 2-6
51-162 Wrocław

+48 71 325 15 05
biuro@rgbelektronika.pl



PRECIZIKA
METROLOGY



A90H

PHOTOELECTRIC ANGLE ENCODER

(A90H-A, A90H-AV, A90H-F)


The semi-precision photoelectric angle encoder **A90H** is used to measure angular position of the key machine components, industrial robots, comparators, rotary tables and to establish an informational link with DCC, NC or Digital Readout Units. It provides information about the value and direction of motion. The encoder is used in automatic control, on-line gauging, process monitoring systems, etc.

Three versions of output signals are available:

- **A90H-A** - sinusoidal signals, with amplitude approx. 11 μ A_{pp};
- **A90H-AV** - sinusoidal signals, with amplitude approx. 1 V_{pp};
- **A90H-F** - square-wave signals (TTL) with integrated subdividing electronics for interpolation x1, x2, x5, x10, x20, x25, x50 and 100.

The modification with distance-coded reference marks is available.

The encoder has two coupling versions: P- via shaft collar and H - via central screw.

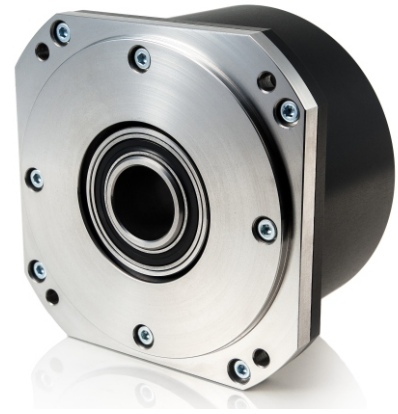

◆ Mechanical Data



◆ Line number (z):	18000	- axial	0.02 mm
◆ Number of output pulses per revolution for A90H-F :	18000, 36000, 90000, 180000, 360000, 450000, 900000, 1800000	- radial	±0.02 mm
◆ Reference signal:		◆ Accuracy grades:	±5.0 arc. sec ; ±7.5 arc. sec
- standard (S)	one per shaft revolution	◆ Starting torque at 20°C	≤ 0.08 Nm
- distance-coded (K)	36 per shaft revolution	◆ Rotor moment of inertia	< 0.6 × 10 ⁻⁴ kgm ²
◆ Permissible mech. speed	≤ 3000 rpm	◆ Protection (IEC 529)	IP64
◆ Max. operating speed (depends on number of output pulses)	600 to 1000 rpm	◆ Maximum weight without cable	1.2 kg
◆ Permissible shaft runout:		◆ Operating temperature	0...+70 °C
		◆ Storage temperature	-30...+85 °C
		◆ Maximum humidity (non condensing)	98 %
		◆ Permissible vibration (55 to 2000 Hz)	≤ 100 m/s ²
		◆ Permissible shock (5 ms)	≤ 300 m/s ²

◆ Electrical Data



Version	A90H-A \sim 11 μ A _{pp}	A90H-AV \sim 1 V _{pp}	A90H-F \square TTL
◆ Supply voltage	+5 V ±5%	+5 V ±5%	+5 V ±5%
◆ Max. supply current (without load)	100 mA	120 mA	150 mA
◆ Light source	LED	LED	LED
◆ Incremental signals	Two sinusoidal I ₁ and I ₂ . Amplitude at 1 k Ω load: - I ₁ = 7...16 μ A - I ₂ = 7...16 μ A	Differential sine +A/-A and +B/-B Amplitude at 120 Ω load: - A = 0.6...1.2 V - B = 0.6...1.2 V	Differential square-wave U ₁ / $\overline{U_1}$ and U ₂ / $\overline{U_2}$. Signal levels at 20 mA load current: - low (logic "0") ≤ 0.5 V - high (logic "1") ≥ 2.4 V
◆ Reference signal	One quasi-triangular I ₀ peak per revolution. Signal magnitude at 1 k Ω load: - I ₀ = 2...8 μ A (usable component)	One quasi-triangular +R and its complementary -R per revolution. Signal magnitude at 120 Ω load: - R = 0.2...0.8 V (usable component)	One differential square-wave U ₀ / $\overline{U_0}$ per revolution. Signal levels at 20 mA load current: - low (logic "0") ≤ 0.5 V - high (logic "1") ≥ 2.4 V
◆ Max. operating frequency	(-3dB cutoff) ≥ 160 kHz	(-3dB cutoff) ≥ 180 kHz	160-1300 kHz (depends on interpolation factor)
◆ Direction of signals	I ₂ lags I ₁ for clockwise rotation (viewed from encoder mounting side)	+B lags +A for clockwise rotation (viewed from encoder mounting side)	U ₂ lags U ₁ for clockwise rotation (viewed from encoder mounting side)
◆ Max. rise and fall time			≤ 0.2 μ s
◆ Standard cable length	1 m, without connector	1 m, without connector	1 m, without connector
◆ Maximum cable length	5 m	25 m	25 m

Note: 1. Maximum operating rotation speed (with proper encoder counting) is limited by maximum operating frequency and maximum mechanical rotation speed. 2. If cable extension is used, power supply conductor cross-section should not be smaller than 0.5 mm².


Mounting type P (clamp)

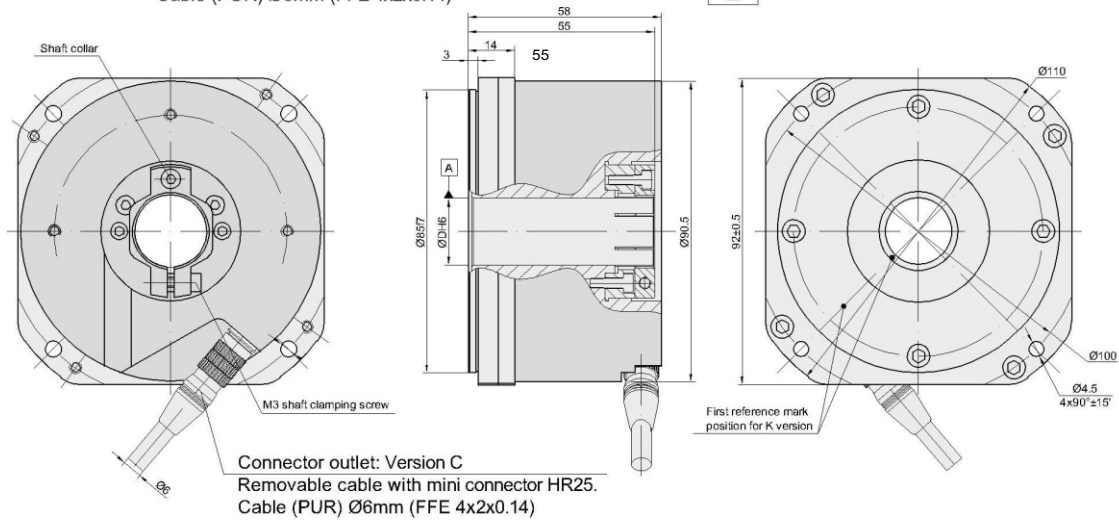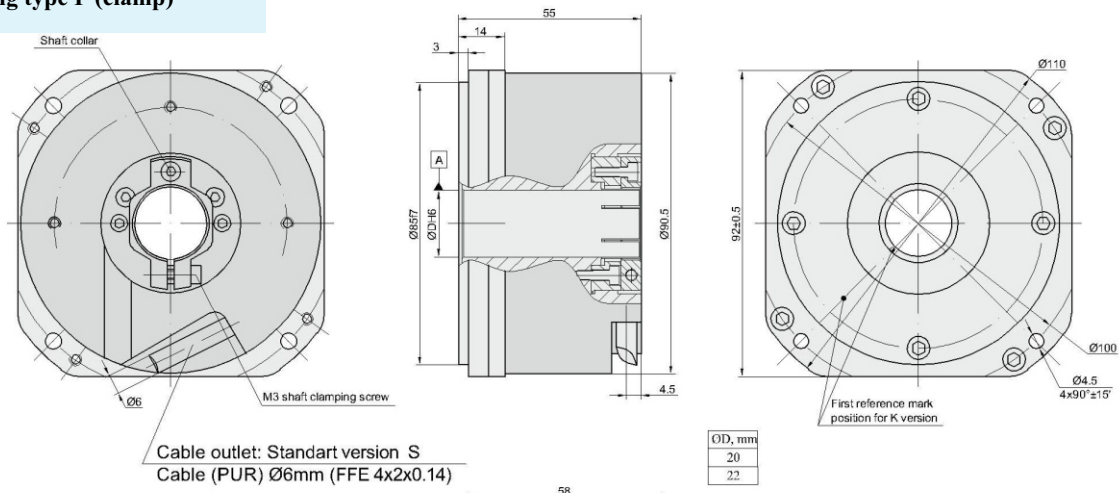

Mounting type H (screw)

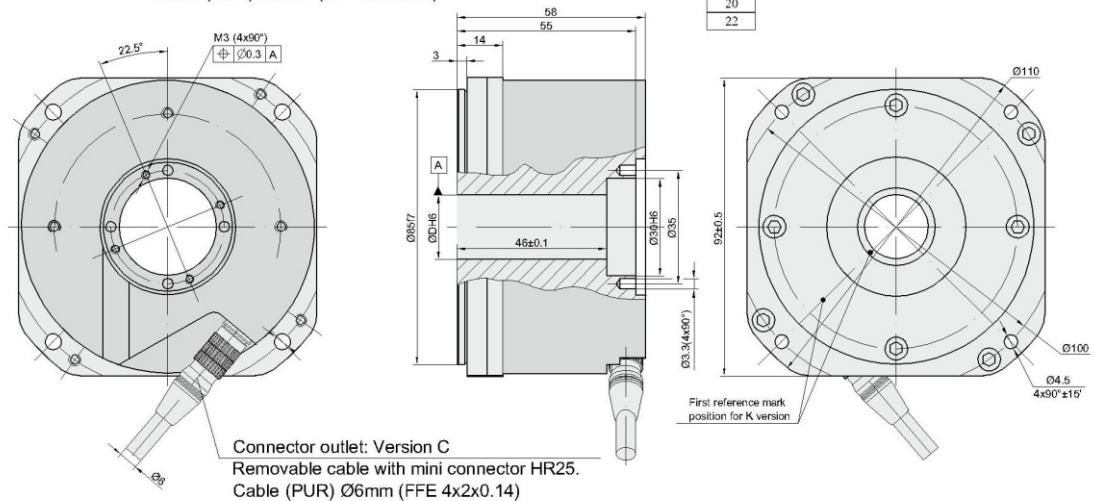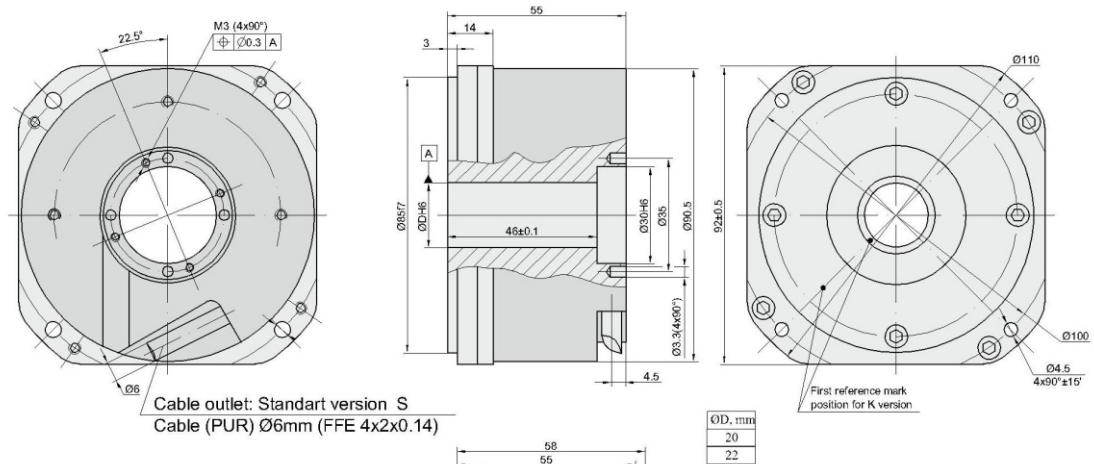


◆ Mounting dimensions

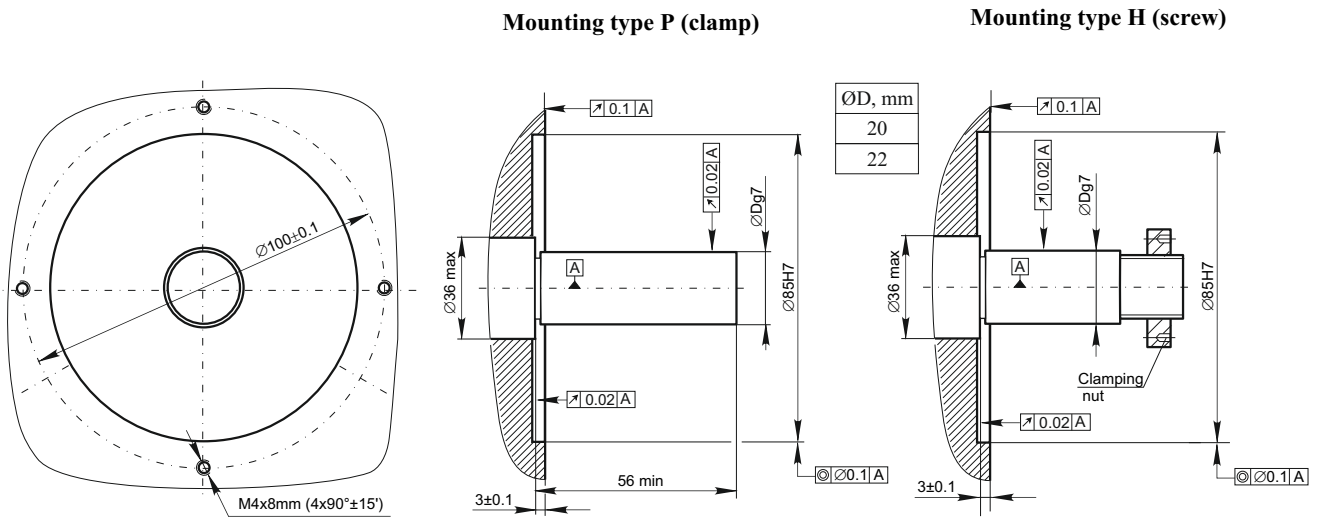


◆ Output signals

Version **A90H-A** $\sim 11 \mu\text{App}$




Version **A90H-AV** $\sim 1 \text{Vpp}$

Complementary signals are not shown




Version **A90H-F** \square TTL



◆ Accessories


C9

9-pin round connector for **A90H-A**




C12

12-pin round connector for **A90H-AV** and **A90H-F**




D9

9-pin flat connector for all **A90H** versions




D15

15-pins flat connector for connection to DRO CS3000 and CS5500 Only for **A90H-F**




ONC

10-pin round connector for all version of **A90H**




RS 10

10-pin round connector for all version of **A90H**



B 12

12-pin round connector for all version of **L18**

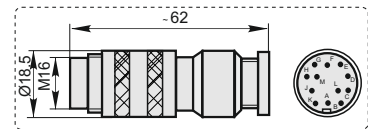

● Order form

A90H - X - X X X X X - X - XX - X X - X - X - X X / X

Output signals version:	Pulse number per revolution:	Reference signal:	Accuracy grade:	Diameter of shaft hole:	Mounting type:	Cable or connector outlet:	Cable length:	Connector type:
A, AV or F	18000 ... 1800000	S - one per revolution K - 36 per revolution, distance-coded	50 - ±5.0 arc. sec. 75 - ±7.5 arc. sec.	20 - 20 mm 22 - 22 mm	P - clamp H - screw	S - version S (cable outlet) C-version C (connector outlet)	AR01 - 1m AR02 - 2m AR03 - 3m ...-...	W - without connector D9 - flat, 9 pins C9 - round, 9 pins D15 - flat, 15 pins ONC - round, 10 pins RS 10 - round, 10 pins B12 - round, 12 pins

Order example: A90H-A-18000-K-50-20-P-S-AR01/W