


Data sheet | Item number: 787-1721

Switched-mode power supply; Eco; 1-phase; 12 VDC output voltage; 8 A output current; DC-OK LED




[www.wago.com/787-1721](http://www.wago.com/787-1721)

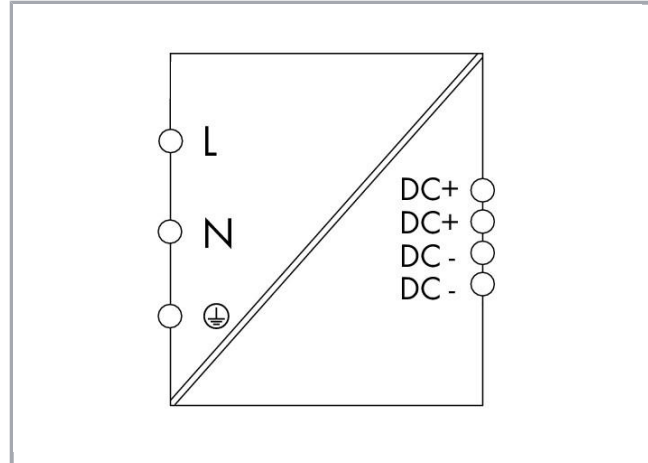

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at {0}.

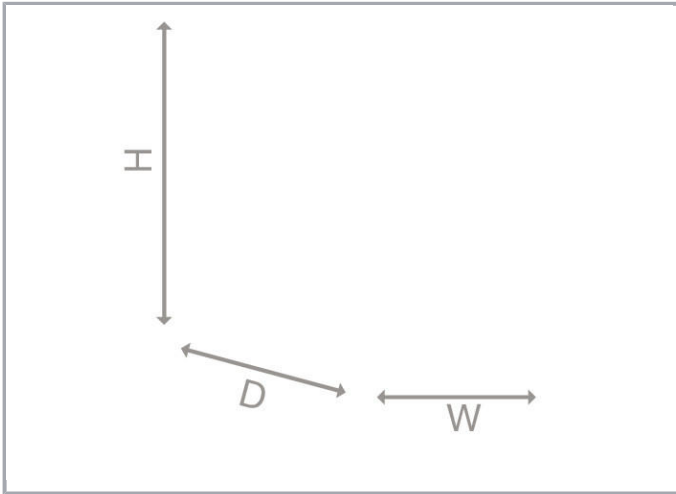

## Item description

### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

## Data

### Technical Data

#### Input

Phases	1
Nominal input voltage $U_{i\text{nom}}$	AC 100 ... 240 V
Input voltage range	AC 90 ... 264 V; DC 125 ... 375 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current $I_i$	$\leq 3$ A (100 VAC)
Discharge current	$\leq 3,5$ mA
Inrush current	$\leq 18$ A
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 10$ ms (230 VAC)

Subject to changes. Please also observe the further product documentation!