
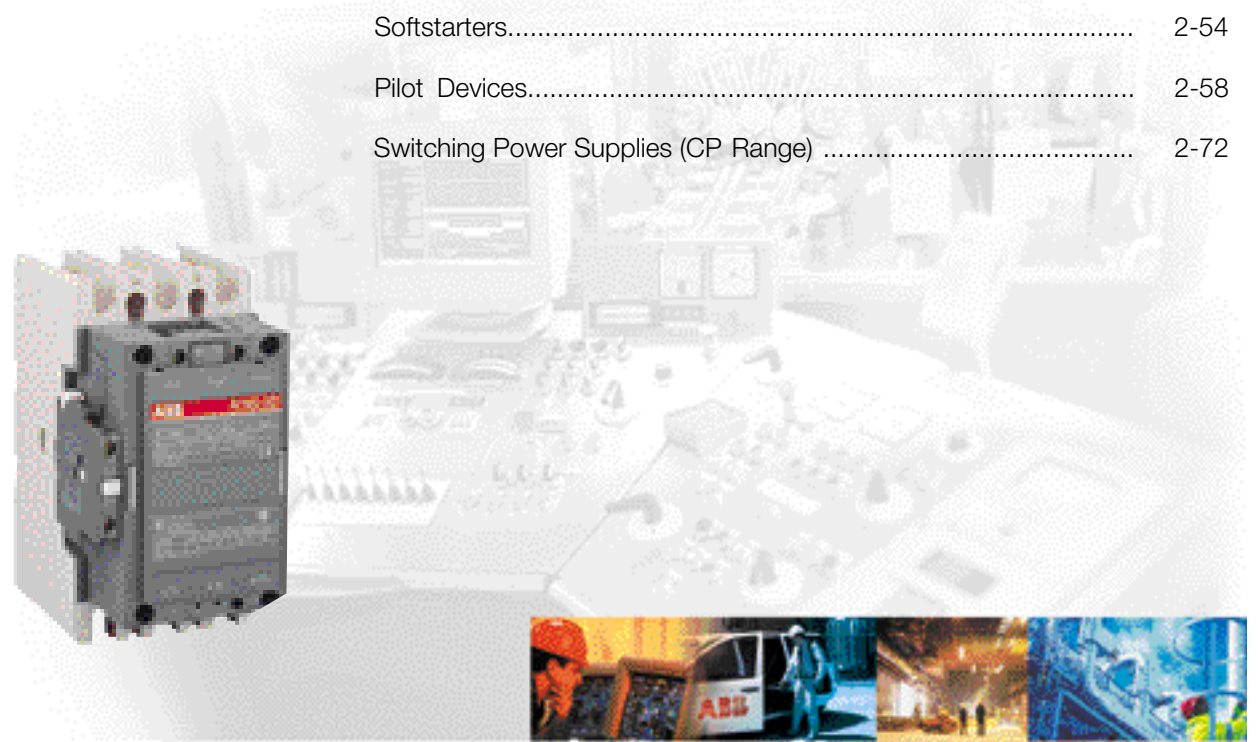


Contents

3 Pole Contactors.....	2-2
4 Pole Contactors.....	2-20
Mini Contactors.....	2-37
Manual Motor Starters	2-42
Field Bus Plugs.....	2-49
Softstarters.....	2-54
Pilot Devices.....	2-58
Switching Power Supplies (CP Range)	2-72

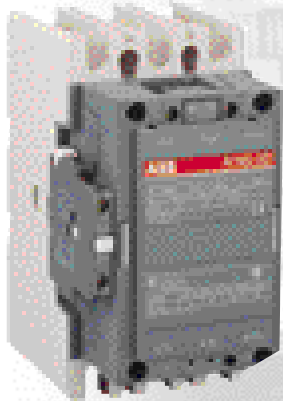

[Return to main index](#)

A., AF., 3-pole Contactors



a.c. Circuit Switching

Switching of 3-phase Cage Motors

AC-3 utilization category
When making, the motor current is about $6 \times I_n$.
Breaking while the motor is running at I_n motor F.L.C.

AC-3	Power rating	≤ 55 °C, 400 V
AC-3	Rated operational current	≤ 55 °C, 400 V ≤ 55 °C, 415 V ≤ 55 °C, 690 V

	A9	A12	A16	A26	A30	A40
kW	4	5.5	7.5	11	15	18.5
A	9	12	17	26	32	37
A	9	12	17	26	32	37
A	7	9	10	17	21	25

Switching of Resistive Circuits

AC-1 utilization category
When making, the switched-on current is equal to the I_n load rated current with $\cos \phi = 0.95$.

AC-1	Rated operational current	≤ 40 °C ≤ 55 °C ≤ 70 °C
	With conductor cross-sectional area	mm ²
	Rated operational voltage	V

	A9	A12	A16	A26	A30	A40
A	25	27	30	45	55	60
A	22	25	27	40	55	60
A	18	20	23	32	39	42
mm ²	2.5	4	4	6	10	16
V	690					

3-pole contactors

Selection & Ordering

- Select contactor type.
- Select contactor coil voltage on cover folding page 0/1, according to control circuit supply. (Please quote coil voltage in plain text).

Control circuit supply	Types	A9-30-10	A12-30-10	A16-30-10	A26-30-10	A30-30-10	A40-30-10
a.c.	Control circuit supply						
a.c. & d.c.	Control circuit supply (Electronic coil interface)	-	-	-	-	-	-
d.c.	Control circuit supply	AE9-30-00	AE12-30-00	AE16-30-00	AE26-30-00	AE30-30-00	AE40-30-00

Contactor Main Accessories

Selection & Ordering

- Select accessory type and quote required data in plain text.

Accessory	Types	CA 5-10	CA 5-01
Auxiliary contacts	CA 5-..., 1-pole CAL 5-..., 2-pole	1-pole, front mounting	1-pole, front mounting
Timers	TP..., Pneumatic TE..., Electronic Supply voltages: 24 V a.c./d.c., 110 ... 120; 220 ... 240; 380 ... 440 V a.c.	TP 40 DA, TP 180 DA Direct timing - Front mounting	TP 40 TE5S Direct timing - Inde
Interlocks	VE 5-., Mechanical / Electrical VM..., Mechanical mounting between 2 contactors	VE 5-1	VM 5-1
Surge suppressors	RV., (Varistor) a.c./d.c. RC., (Capacitor) a.c.	RV 5	RC 5-1

Protection of 3-phase motors

Selection & Ordering

- Select O/L relay type and setting range according to motor F.L.C.

O/L relays	Types & setting range in Amps	TA 25 DU...	TA 42 DU...
TA..DU., Thermal O/L relay E..DU., Electronic O/L relay Standard starting time 2 ... 10 s tripping class 10 A		0.10...0.16 0.16...0.25 0.25...0.40 0.40...0.63 0.63...1.0	1.0...1.4 1.3...1.8 1.7...2.4 2.2...3.1 2.8...4.0
		3.5...5.0 4.5...6.5 6.0...8.5 7.5...11 10...14	13...19 18...25 24...32
			22...32 29...42
		Please consult us for electronic solution	

[Return to main index](#)