

# MINIATURE LOW-PROFILE TENSION LINKS

## LOW PROFILE 19 mm (0.75") TO 25 mm (1") HEIGHT

### STANDARD AND METRIC MODELS

**Tension/Compression  
Calibrated in Tension**  
**10 lb to 1000 lb**  
**5 kg to 500 kgf**

1 Newton = 0.2248 lb  
1 daNewton = 10 Newtons  
1 lb = 454 g  
1 t = 1000 kgf = 2204 lb

## LC703/LCM703 Series



- ✓ Low Profile
- ✓ High Accuracy
- ✓ Rugged Industrial Design

The LC703/LCM703 Series comprises economical universal (tension/compression) load cells with a low profile. Ranges above 100 lb are stainless steel; ranges below 100 lb are aluminum. The low profile and rugged design make LC703 and LCM703 suitable for many industrial applications, including robotics, automated weighing systems, and batch-process control systems.

### SPECIFICATIONS

**Excitation:** 10 Vdc (15V max)

**Output:** 2 mV/V nominal

**5-Point Calibration:**

0%, 50%, 100%, 50%, 0%

**Linearity:**

10 to 100 lb: ±0.15%

>100 lb: ±0.10 FSO

5 to 50 kgf: ±0.15%

75 to 500 kgf: ±0.10%

**Hysteresis:**

10 to 100 lb: ±0.15%

>100 lb: ±0.10 FSO

5 to 50 kgf: ±0.15%

75 to 500 kgf: ±0.10%

**Repeatability:** ±0.05%


**Zero Balance:** ±1.0% FSO

**Operating Temp Range:**

-40 to 82°C (-40 to 180°F)

**STANDARD**  
LC703-25,  
shown actual size.

**METRIC**  
LCM703-150,  
shown actual size.

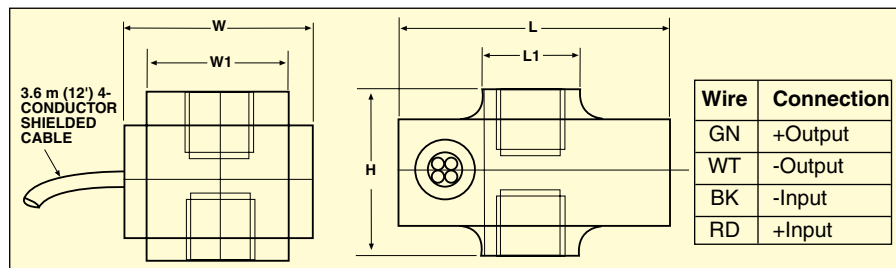

**Dimensions: mm (in)**

CAPACITY	L (MAX)	L1	W	W1	H	THREAD
10 lb	38 (1.50)	14 (0.56)	14 (0.54)	9.5 (0.38)	19 (0.75)	10-32 x 0.20
5 kgf						M5 x 0.8-6H
25 to 100 lb	41 (1.62)	14 (0.56)	17 (0.66)	13 (0.50)	19 (0.75)	¼-28 x 0.23
10 to 50 kgf						M6 x 1.00-6H
150 to 1K lb	44 (1.75)	14 (0.56)	24 (0.93)	19 (0.75)	25 (1.0)	¾-24 x 0.38
75 to 500 kgf						M10 x 1.5-6H

**Compensated Temp Range:**  
16 to 71°C (60 to 160°F)

**Thermal Effects:**

**Zero:** ±0.005% FSO/°F

**Span:** ±0.005% FSO/°F

**Protection Class:** IP54

**Safe Overload:** 150% of capacity

**Ultimate Overload:** 300% of capacity

**Output Resistance:** 350 ±10 Ω

**Input Resistance:** 360 Ω minimum

**Full Scale Deflection:** 0.003" nominal

**Construction:**

≤100 lb: Aluminum

>100 lb: 17-4 PH stainless steel

≤50 kg: Aluminum

>50 kg: 17-4 PH stainless steel

**Electrical:** 3.6 m (12') shielded 4-conductor PVC cable

# MINIATURE LOW-PROFILE TENSION LINKS

To Order				
CAPACITY		MODEL NO.	COMPATIBLE METERS*	ROD END
kgf	lb			
<b>STANDARD MODELS</b>				
4.5	10	LC703-10	DPiS, DP41-S, DP25B-S	REC-010M
11	25	LC703-25	DPiS, DP41-S, DP25B-S	REC-014M
23	50	LC703-50	DPiS, DP41-S, DP25B-S	REC-014M
34	75	LC703-75	DPiS, DP41-S, DP25B-S	REC-014M
45	100	LC703-100	DPiS, DP41-S, DP25B-S	REC-014M
68	150	LC703-150	DPiS, DP41-S, DP25B-S	REC-038M
91	200	LC703-200	DPiS, DP41-S, DP25B-S	REC-038M
136	300	LC703-300	DPiS, DP41-S, DP25B-S	REC-038M
227	500	LC703-500	DPiS, DP41-S, DP25B-S	REC-038M
341	750	LC703-750	DPiS, DP41-S, DP25B-S	REC-038M
455	1000	LC703-1K	DPiS, DP41-S, DP25B-S	REC-038M
<b>METRIC MODELS</b>				
5	11	LCM703-5	DPiS, DP41-S, DP25B-S	MREC-M5M
10	22	LCM703-10	DPiS, DP41-S, DP25B-S	MREC-M6M
25	55	LCM703-25	DPiS, DP41-S, DP25B-S	MREC-M6M
50	110	LCM703-50	DPiS, DP41-S, DP25B-S	MREC-M6M
75	165	LCM703-75	DPiS, DP41-S, DP25B-S	MREC-M10M
100	220	LCM703-100	DPiS, DP41-S, DP25B-S	MREC-M10M
150	331	LCM703-150	DPiS, DP41-S, DP25B-S	MREC-M10M
250	551	LCM703-250	DPiS, DP41-S, DP25B-S	MREC-M10M
500	1102	LCM703-500	DPiS, DP41-S, DP25B-S	MREC-M10M

Comes complete with 5-point NIST-traceable calibration and 59 kΩ shunt data.

\* Visit us online for compatible meters. DPiS meter suitable for one direction measurement only.

**Ordering Examples:** LC703-200, 200 lb capacity universal link with 3.6 m (12') cable.

LCM703-100, 100 kgf capacity universal link with 3.6 m (12') cable, MREC-M10M, accessory rod ends.

## COMPATIBLE METERS

### DP25B/DP41-B



- ✓ mV, V, mA, Strain Gage Thermocouple, RTD Inputs
- ✓ Full Process Unit Scaling
- ✓ Built-In Transducer Power



DP41-B, shown smaller than actual size.

**MONOGRAM SERIES**

**PATENTED**



DP25B-E, shown smaller than actual size.

## To Order

MODEL NO.	DESCRIPTION
DP25B-E	4-digit voltage/current input meter with excitation
DP25B-S	4-digit mV input meter with excitation
DP41-B	6-digit 1/8 DIN universal input meter with excitation

Comes complete with operator's manual.

**Ordering Examples:** DP25B-E, voltage/current input meter for use with 0 to 5 V, 0 to 10 V, 4 to 20 mA output transducers.

DP25B-S, mV input meter for use with mV/V output transducers, DP41-B, universal input meter for use with all standard transducer outputs.