

Magnetic Contactors and Starters

SC and SW series

Optional unit

Coil drive units for IC output SZ-CD

This unit is designed to carry out ON-OFF control for contactors with output (24V DC) from the electronic controller. It can be attached to a side or top of a contactor, thus saving on installation space.

■ Features

- This unit operates at, 24V DC.
- Module type allows easy attachment and removal.
- SZ-CD5 and -CD6 can be installed individually and rail mounted.
- Surge suppression function (except SZ-CD5)
- This unit has a built-in surge suppression device (varistor) to protect electronic equipment from surges which occur when the coil is de-energized.




Type		Used with
SZ-CD1 SZ-CD3 SZ-CD5	With relay output	SC-03 to 5-1 SC-N1 to N3 SC-N4 to N12
SZ-03/CD2-24 SZ-CD4 SZ-CD6	With SSR output	SC-03 to 5-1 SC-N1 to N3 SC-N4to N12

■ Specifications

Description	SZ-CD1	SZ-CD3, CD5	SZ-03/CD2-24, CD4, CD6
Coil	Rated voltage Pick-up voltage (at 20°C) Drop-out voltage (at 20°C) Max. allowable voltage Power consumption	24V DC 85% or less of rated voltage Over 5% of rated voltage 130% or less of rated voltage 0.2W(8.3mA)	24V DC 70% or less of rated voltage Over 5% of rated voltage 110% or less of rated voltage 0.36W(15mA)
Contact	Output device Max. make/break voltage Operating time(ms)	Relay output 250V AC, 110V DC 2-5	SSR output 100-240V AC 1 or less


■ Dimensions, mm

SZ-CD1,03/CD2-24 (Top mount)

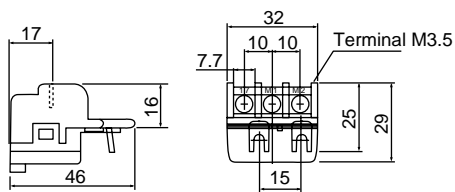


Mass: 26g

SZ-CD3,CD4 (Top mount)

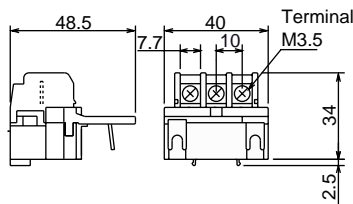

Mass: 28g


SZ-CD5,CD6 (Side mount)

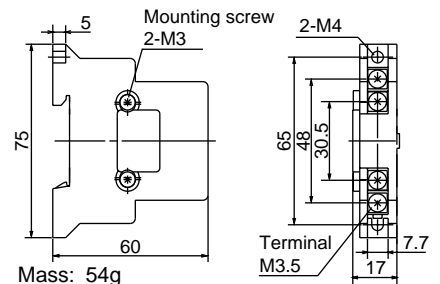


Mass: 54g

■ Wiring diagrams


SZ-CD1




SZ-03/CD2-24




SZ-CD3



SZ-CD4



SZ-CD5



SZ-CD6

