SKM 200GB123D

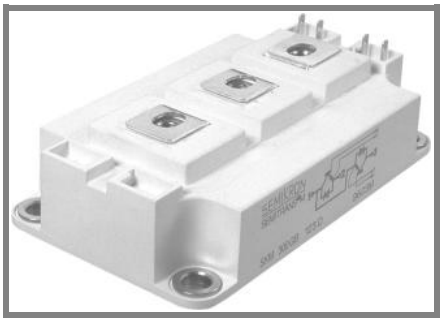

SEMITRANS® 3

IGBT Modules

SKM 200GB123D

SKM 200GAL123D

SKM 200GAR123D

Features

- MOS input (voltage controlled)
- N channel, homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (13 mm) and creepage distances (20 mm)

Typical Applications*

- AC inverter drives
- UPS

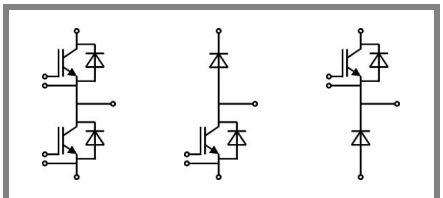

GB GAL GAR

Absolute Maximum Ratings			T_c = 25 °C, unless otherwise specified	
Symbol	**Conditions**		**Values**	**Units**
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 150 °C	T_{case} = 25 °C	200	A
		T_{case} = 85 °C	180	A
I_{CRM}	I_{CRM}=2xI_{Cnom}		300	A
V_{GES}			± 20	V
t_{psc}	V_{CC} = 600 V; $V_{GE} \leq$ 20 V; V_{CES} < 1200 V	T_j = 125 °C	10	µs
Inverse Diode				
I_F	T_j = 150 °C	T_{case} = 25 °C	200	A
		T_{case} = 80 °C	130	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		300	A
I_{FSM}	t_p = 10 ms; sin.	T_j = 150 °C	1440	A
Freewheeling Diode				
I_F	T_j = 150 °C	T_{case} = 25 °C	260	A
		T_{case} = 80 °C	180	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		400	A
I_{FSM}	t_p = 10 ms; sin.	T_j = 150 °C	1800	A
Module				
$I_{t(RMS)}$			500	A
T_{vj}			- 40 ... + 150 (125)	°C
T_{stg}			- 40...+ 125	°C
V_{isol}	AC, 1 min.		2500	V

Characteristics			T_c = 25 °C, unless otherwise specified			
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
IGBT						
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 6 mA		4,5	5,5	6,5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = V_{CES}	T_j = 25 °C		0,1	0,3	mA
V_{CE0}		T_j = 25 °C		1,4	1,6	V
		T_j = 125 °C		1,6	1,8	V
r_{CE}	V_{GE} = 15 V	T_j = 25°C		7,33	9,33	mΩ
		T_j = 125°C		10	12,66	mΩ
$V_{CE(sat)}$	I_{Cnom} = 150 A, V_{GE} = 15 V	T_j = °$C_{chiplev.}$		2,5	3	V
C_{ies}	V_{CE} = 25, V_{GE} = 0 V	f = 1 MHz		10	13	nF
C_{oes}				1,5	2	nF
C_{res}				0,8	1,2	nF
Q_G	V_{GE} = -8V - +20V			1500		nC
R_{Gint}	T_j = °C			2,5		Ω
$t_{d(on)}$	R_{Gon} = 5,6 Ω	V_{CC} = 600V		220	400	ns
t_r		I_C= 150A		100	200	ns
E_{on}		T_j = 125 °C		24		mJ
$t_{d(off)}$	R_{Goff} = 5,6 Ω	V_{GE} = -15V		600	800	ns
t_f				70	100	ns
E_{off}				17		mJ
$R_{th(j-c)}$	per IGBT				0,09	K/W

© by SEMIKRON

SKM 200GB123D

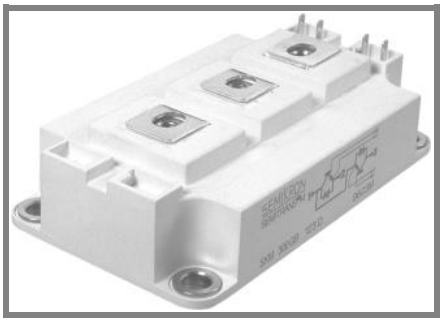

SEMITRANS® 3

IGBT Modules

SKM 200GB123D

SKM 200GAL123D

SKM 200GAR123D

Features

- MOS input (voltage controlled)
- N channel, homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (13 mm) and creepage distances (20 mm)

Typical Applications*

- AC inverter drives
- UPS

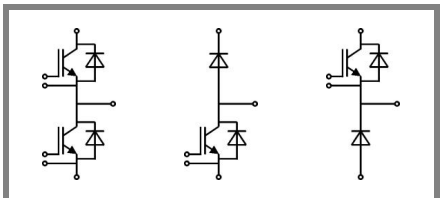

GB **GAL** **GAR**

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
Inverse Diode						
$V_F = V_{EC}$	I_{Fnom} = 150 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		2	2,5	V
		T_j = 125 °$C_{chiplev.}$		1,8		V
V_{F0}		T_j = 25 °C		1,1	1,2	V
		T_j = 125 °C				V
r_F		T_j = 25 °C		6	8,7	mΩ
		T_j = 125 °C				mΩ
I_{RRM}	I_F = 150 A	T_j = 125 °C		90		A
Q_{rr}	di/dt = 1500 A/µs			8		µC
E_{rr}	V_{GE} = -15 V; V_{cc} = 600V			6,6		mJ
$R_{th(j-c)D}$	per diode				0,25	K/W
Freewheeling Diode						
$V_F = V_{EC}$	I_{Fnom} = 200 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		2	2,5	V
		T_j = 125 °$C_{chiplev.}$		1,8		V
V_{F0}		T_j = 25 °C		1,1	1,2	V
		T_j = 125 °C				V
r_F		T_j = 25 °C		4,5	6,5	V
		T_j = 125 °C				V
I_{RRM}	I_F = 200 A	T_j = 125 °C		120		A
Q_{rr}	di/dt = 2000 A/µs			11		µC
E_{rr}	V_{GE} = 0 V; V_{CC} = 600 V					mJ
$R_{th(j-c)FD}$	per diode				0,18	K/W
Module						
L_{CE}				15	20	nH
$R_{CC'+EE'}$	res., terminal-chip	T_{case}= 25 °C		0,35		mΩ
		T_{case}= 125 °C		0,5		mΩ
$R_{th(c-s)}$	per module				0,038	K/W
M_s	to heat sink M6		3		5	Nm
M_t	to terminals M6, M4		2,5		5	Nm
w					325	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

© by SEMIKRON

SKM 200GB123D

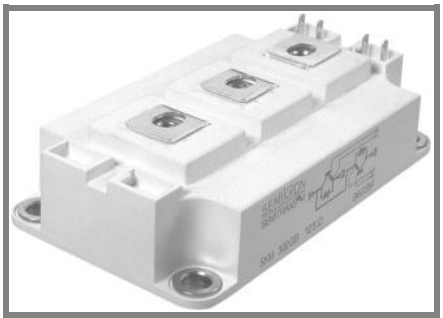

SEMITRANS® 3

IGBT Modules

SKM 200GB123D

SKM 200GAL123D

SKM 200GAR123D

Features

- MOS input (voltage controlled)
- N channel, homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (13 mm) and creepage distances (20 mm)

Typical Applications*

- AC inverter drives
- UPS

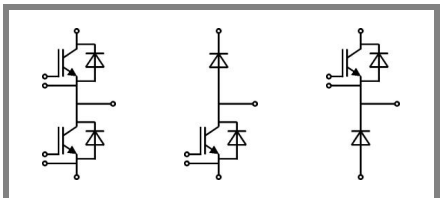

GB **GAL** **GAR**

Z_{th} Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
R_i	i = 1	59	mk/W
R_i	i = 2	23	mk/W
R_i	i = 3	6,8	mk/W
R_i	i = 4	1,2	mk/W
tau_i	i = 1	0,03	s
tau_i	i = 2	0,0087	s
tau_i	i = 3	0,002	s
tau_i	i = 4	0,0002	s
$Z_{th(j-c)D}$			
R_i	i = 1	170	mk/W
R_i	i = 2	66	mk/W
R_i	i = 3	12	mk/W
R_i	i = 4	2	mk/W
tau_i	i = 1	0,0348	s
tau_i	i = 2	0,0072	s
tau_i	i = 3	0,077	s
tau_i	i = 4	0,0002	s

© by SEMIKRON

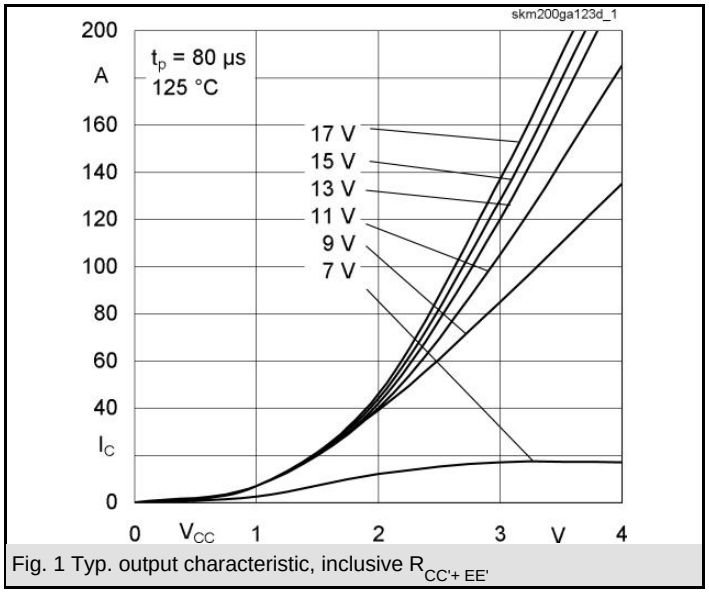

Fig. 1 Typ. output characteristic, inclusive $R_{CC'+ EE'}$

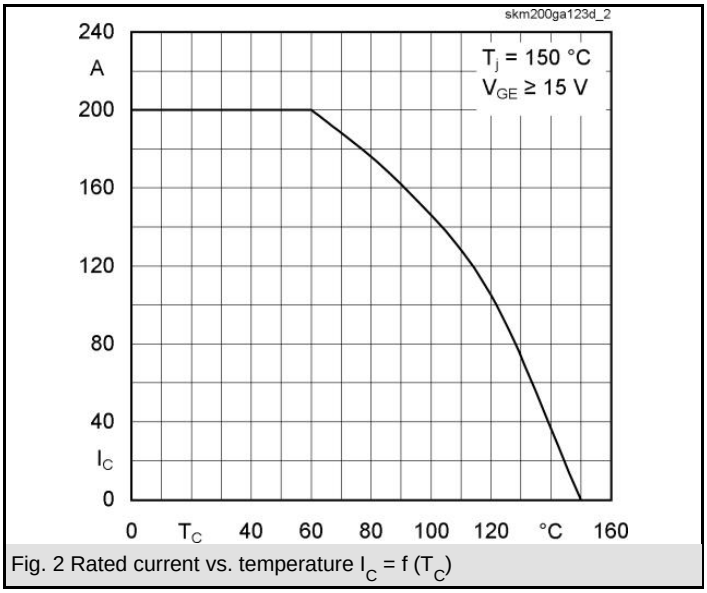

Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

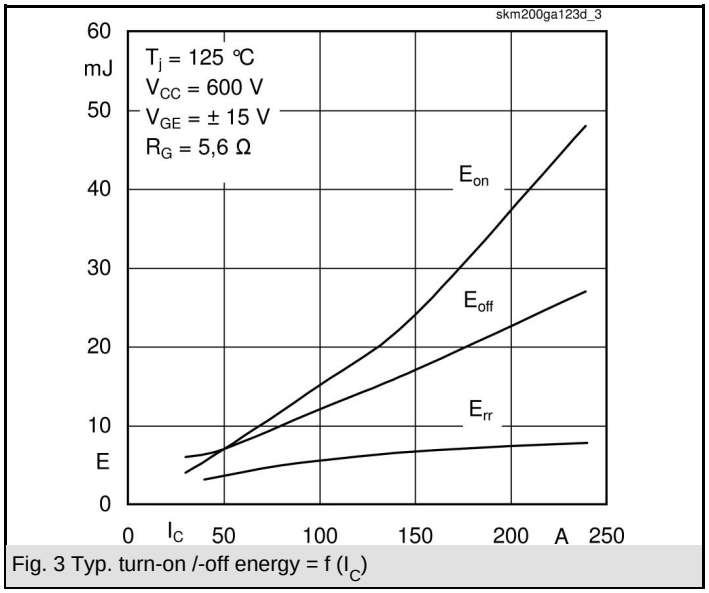

Fig. 3 Typ. turn-on /-off energy = f (I_C)

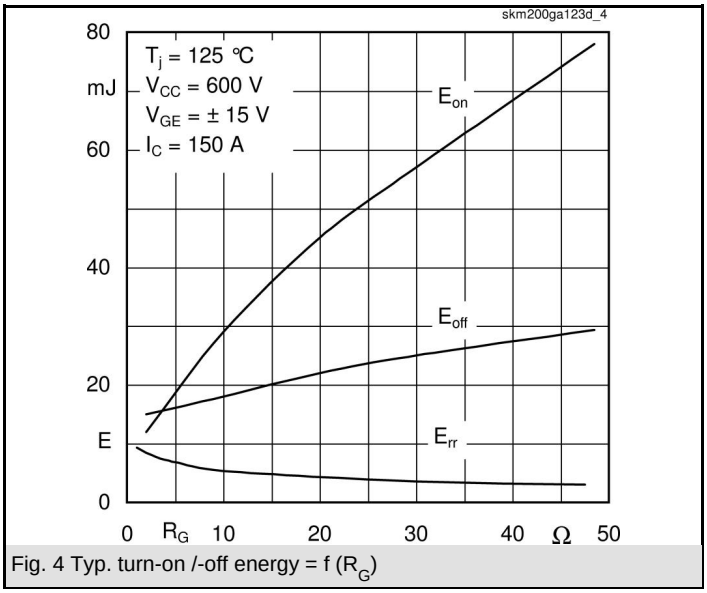

Fig. 4 Typ. turn-on /-off energy = f (R_G)

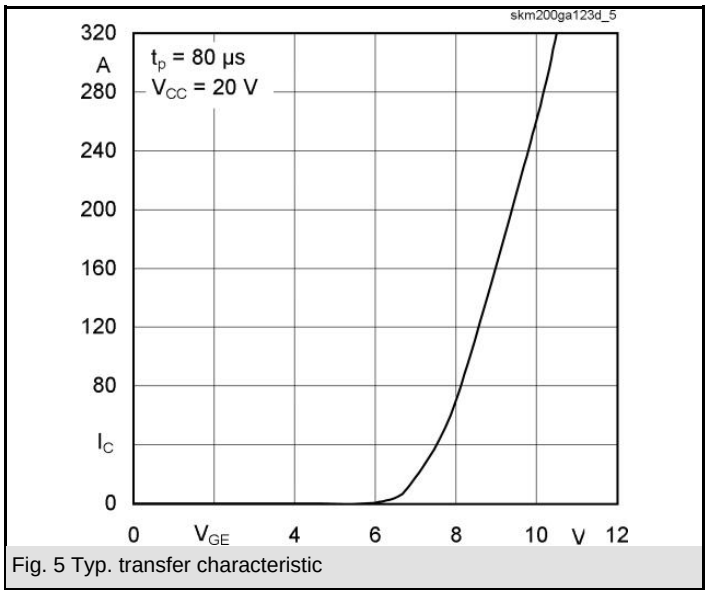

Fig. 5 Typ. transfer characteristic

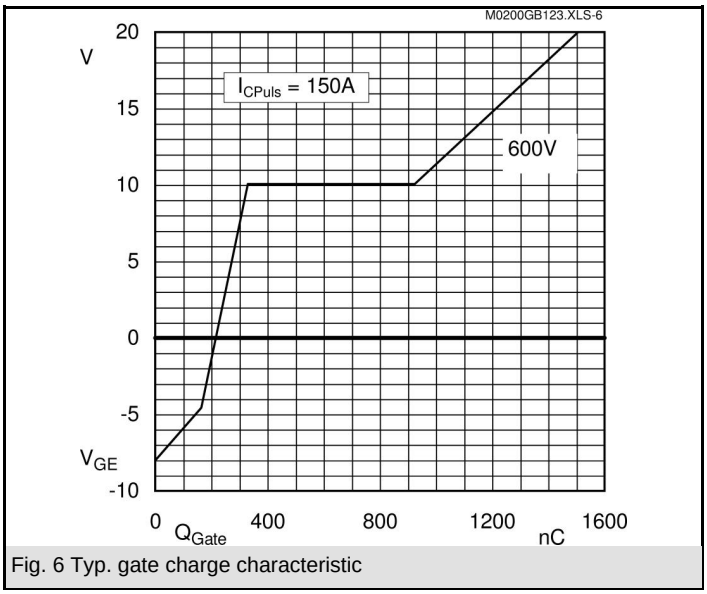

Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

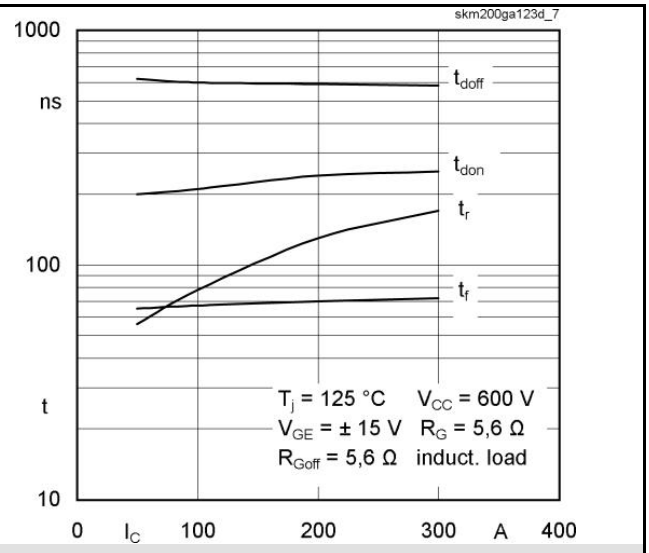

Fig. 7 Typ. switching times vs. I_C

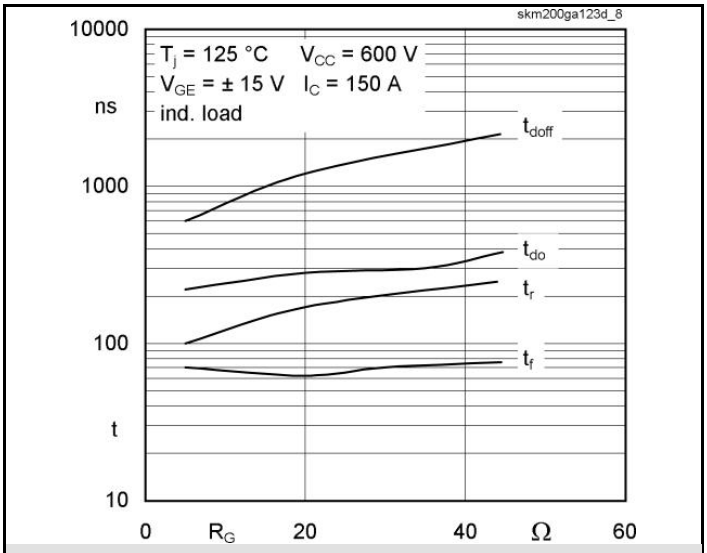

Fig. 8 Typ. switching times vs. gate resistor R_G

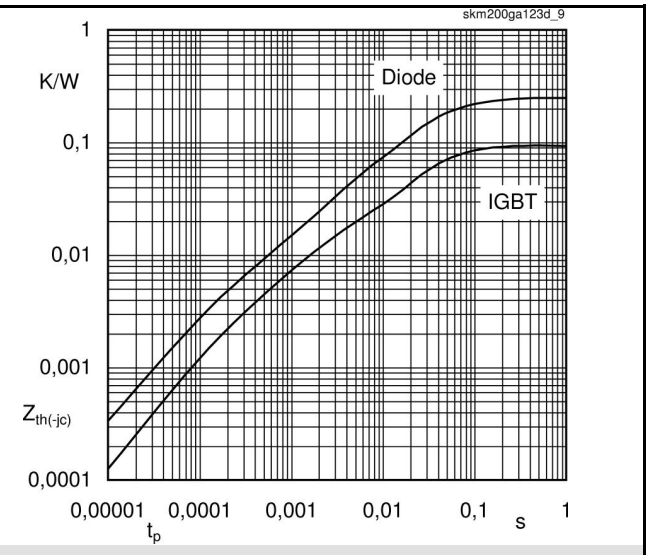

Fig. 9 Transient thermal impedance

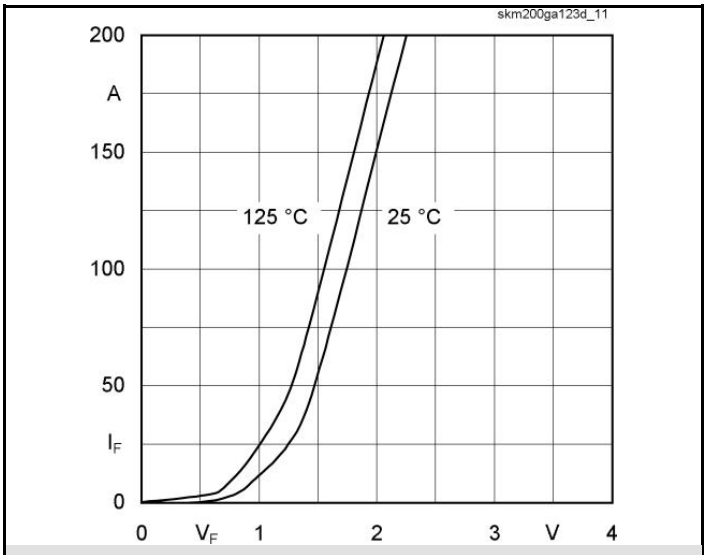

Fig. 10 CAL diode forward characteristic

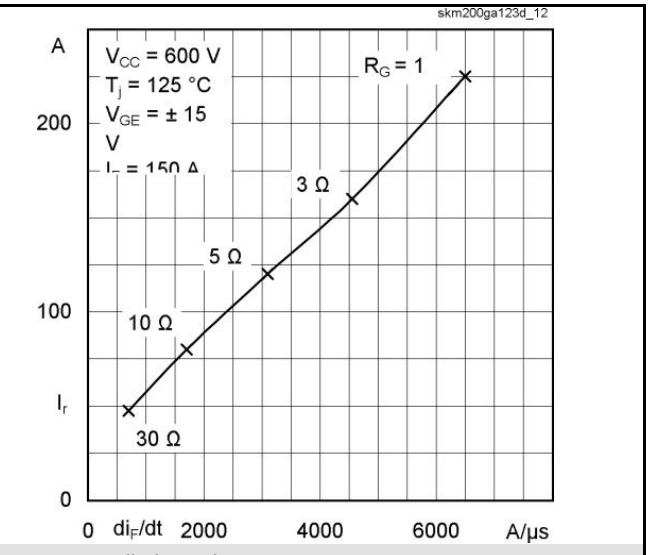

Fig. 11 Typ. CAL diode peak reverse recovery current

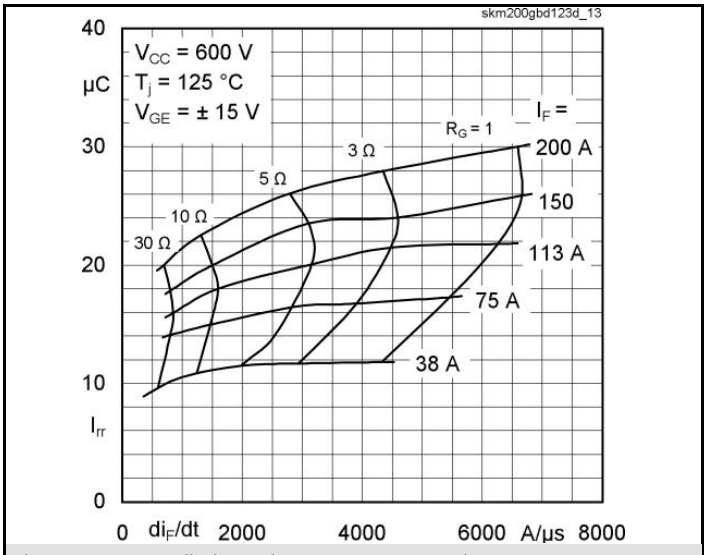

Fig. 12 Typ. CAL diode peak reverse recovery charge

 © by SEMIKRON

SKM 200GB123D

UL Recognized File 63 532

CASED56

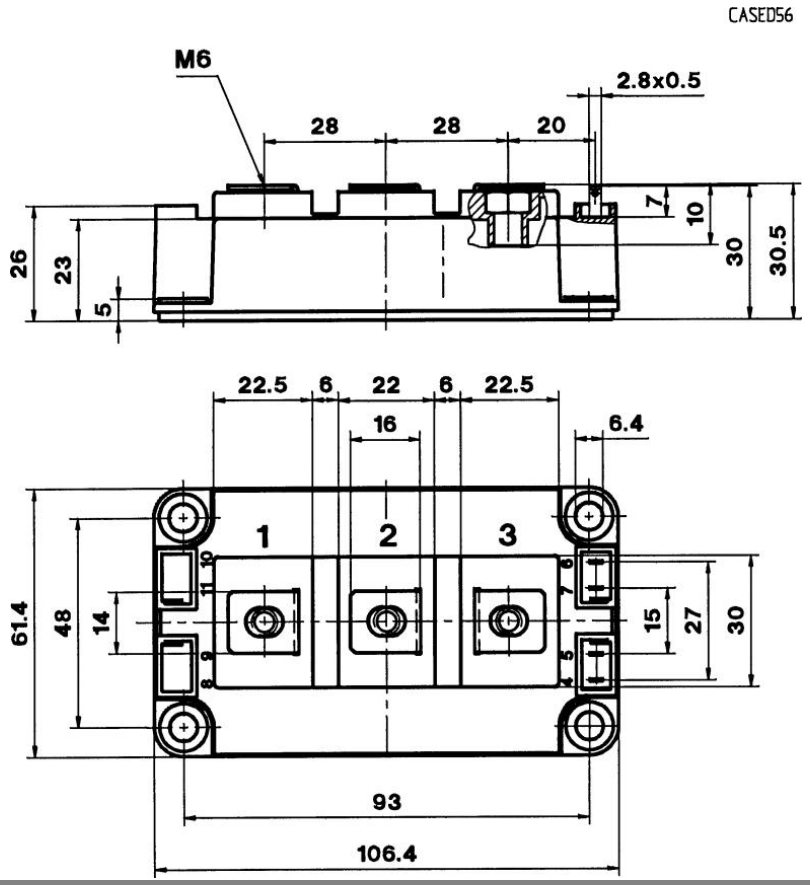

Case D 56

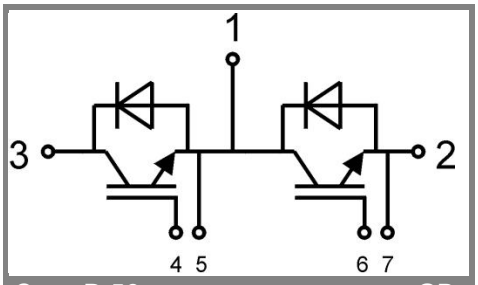

Case D 56 GB

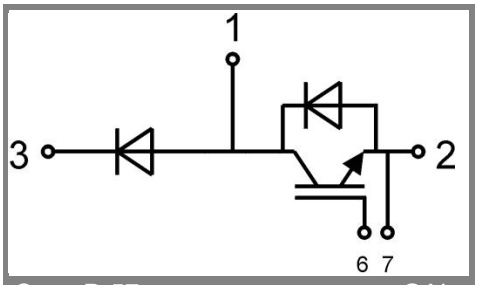

Case D 57 GAL
(56)

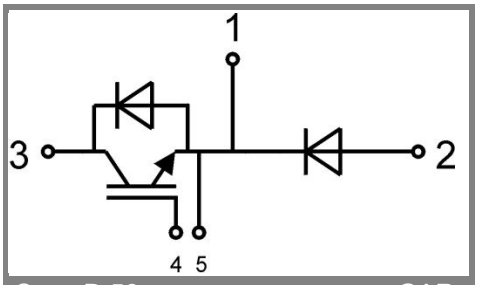

Case D 58 GAR
(56)

 © by SEMIKRON