

BTE6000 / PTU6000 Series

Precision stainless steel pressure transmitters

INDIVIDUAL PERFORMANCE CHARACTERISTICS¹

0...10 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{amb} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU6N...	4.85	5.0	5.15	V
	all others	-0.15	0	0.15	
Full scale span ⁷	BTE/PTU6N...	4.9	5.0	5.1	
	all others	9.9	10.0	10.1	
Output impedance				50	Ω
Power consumption (no load)			100		mW

1...6 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{amb} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU6N...	3.35	3.5	3.65	V
	all others	0.85	1.0	1.15	
Full scale span ⁷	BTE/PTU6N...	2.4	2.5	2.6	
	all others	4.9	5.0	5.1	
Output impedance			6.0	50	Ω
Power consumption (no load)			100		mW

4...20 mA output ($V_s = 15\text{ V}$, $R_L = 100\ \Omega$, $t_{amb} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU6N...	11.85	12.0	12.15	mA
	all others	3.85	4.0	4.15	
Full scale span ⁷	BTE/PTU6N...	7.9	8.0	8.1	
	all others	15.9	16.0	16.1	
Output impedance			0.1		Ω
Power consumption ($I_L = 20\text{ mA}$)			260		mW

0...20 mA output ($V_s = 15\text{ V}$, $R_L = 100\ \Omega$, $t_{amb} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU6N...	9.85	10.0	10.15	mA
	all others	-0.15	0	0.15	
Full scale span ⁷	BTE/PTU6N...	9.9	10.0	10.1	
	all others	19.9	20.0	20.1	
Output impedance			0.1		Ω
Power consumption ($I_L = 20\text{ mA}$)			260		mW

BTE6000 / PTU6000 Series

Precision stainless steel pressure transmitters

Specification notes:

1. IP 65 protection is given when the connector is locked with a rubber washer. For proper function the gage port is vented to the atmosphere through the connector/cable assembly. Thus the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects tested and guaranteed from 0 to 70°C relative to 25°C. All specifications shown are relative to 25°C.
5. Non-linearity refers to the **Best Straight Line** fit measured for offset, full scale span and 1/2 full scale span.
6. Long term stability is the change in output after one year or 1 million pressure cycles.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. Test are in accordance with EN61000-6-2, April 1999.
9. CE-labelling is in accordance with 89/336/EEC.
10. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.
11. Available for pressure ranges from 1 bar (15 psi) absolute upwards only.
12. Other sealing materials are available on request.


ELECTROMAGNETIC CAPABILITY⁸

	Test conditions	Criterion	Interference
Radiated, radio frequency electromagnetic field immunity (RFI)	EN61000-4-3: Grade 3, 10 V/m, 80 to 1000 MHz 80 % AMC (1 kHz)	A	<1 %FSO
Electrical fast transient / burst immunity (EFT)	EN61000-4-4: Grade 3, ±2 kV	B	<1 %FSO
Electrostatic discharge immunity test (ESD)	EN61000-4-2: Grade 4, ±8 kV, contact discharge	B	<1 %FSO
Immunity to conducted disturbances induced by radio-frequency fields	EN61000-4-6: Grade 3, 0.15 to 80 MHz 10 V, 80 % AMC (1 kHz)	A	<1 %FSO

LOAD LIMITATION


0...20 mA output version

4...20 mA output version

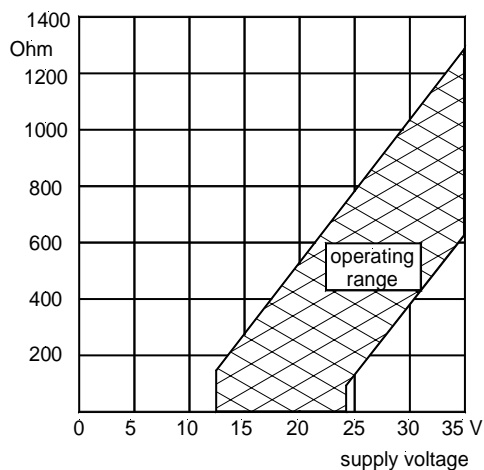

RECOMMENDED ACCESSORY

Plug **DIN EN 175301-803 A** and profile washer included in delivery. For a complete connector/cable assembly use order no. **ZK000110-x** (x=cable lengths in m).

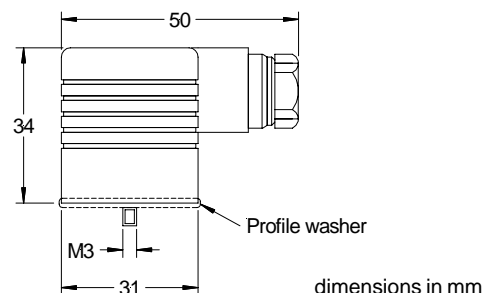

Note:

For proper function of all gage devices the gage port must be vented to the atmosphere through the connector/cable assembly.