


## SUBMINIATURE, HIGH SENSITIVITY PHOTOINTERRUPTER

### \*Features

- Compact and thin.
- Visible light cut-off type.
- High sensitivity.
- Package: 1000pcs/Reel.
- Moisture sensitivity level : level 4.
- RoHS Compliant.

### \*Applications

- Cassette tape recorders, VCRs.
- Floppy disk drives.
- Various microcomputerized control equipment.

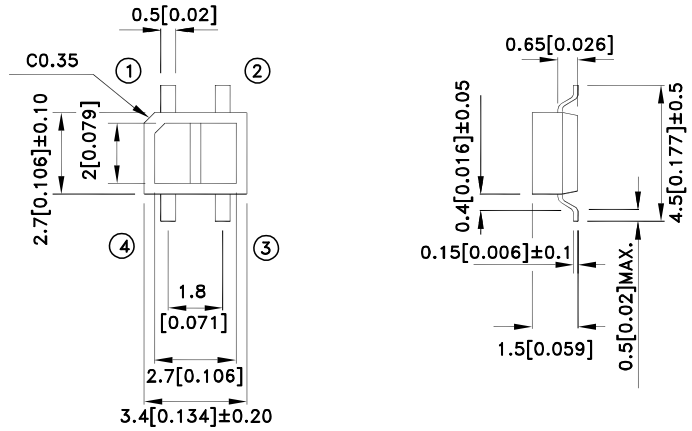

- ① Anode                      ② Emitter  
③ Collector                  ④ Cathode

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the data-sheet are subject to change without prior notice.

### \*Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P_D$	75	mW
	Peak Forward Current (Pulse Width $\leq 100\mu\text{s}$ , Duty Cycle =1%)	$I_{FP}$	1	A
Output	Collector-emitter voltage	$V_{CEO}$	35	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	20	mA
	Collector power dissipation	$P_C$	75	mW
Operating temperature		$T_{opr}$	-25~+85	°C
Storage temperature		$T_{stg}$	-40~+100	°C

#### Note:

1. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.



## Electro-optical Characteristics

Parameter		Symbol	Conditions	Min.	TYP.	Max.	Unit	
Input	Forward Voltage	$V_F$	$I_F=20\text{mA}$	1.0	1.2	1.5	V	
	Reverse Current	$I_R$	$V_R=6\text{V}$	-	-	10	$\mu\text{A}$	
	Peak Wavelength	$\lambda_P$	$I_F=20\text{mA}$	-	940	-	nm	
Output	Collector Dark Current	$I_{CEO}$	$V_{CE}=20\text{V}$	-	$10^{-9}$	$10^{-7}$	A	
Transfer characteristics	*1 Collector Current	$I_C$	$V_{CE}=2\text{V}$ $I_F=4\text{mA}$	10	-	400	$\mu\text{A}$	
	*2 Leak Current	$I_{LEAK}$	$V_{CE}=2\text{V}$ $I_F=4\text{mA}$	-	-	0.1	$\mu\text{A}$	
	Response time	Rise time	$t_r$	$V_{CE}=2\text{V}$ $I_C=100\mu\text{A}$ $R_L=1\text{K}\Omega, d=1\text{mm}$	-	20	100	$\mu\text{sec}$
		Fall time	$t_f$		-	20	100	$\mu\text{sec}$

\*1 The condition and arrangement of the reflective object are shown below.

\*2 Without reflective object.

\*3 Excess driving current and/or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

## Classification table of radiant flux

BIN CODE	E	F	G
$I_C (\mu\text{A})$	10~120	100~250	200~400

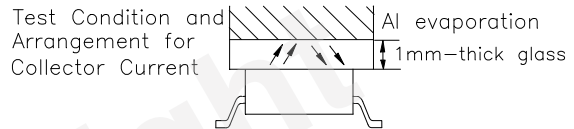


Fig. 1 Forward Current vs. Forward Voltage




Fig. 2 Collector Current vs. Forward Current

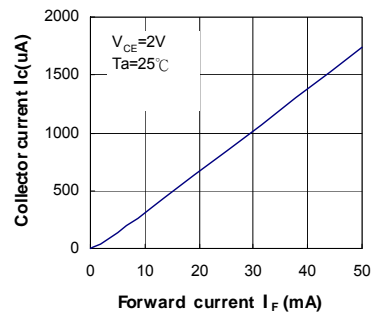


Fig. 3 Collector Current vs. Collector-emitter Voltage




Fig. 4 Relative Collector Current vs. Ambient Temperature

