Wide Gap Slotted Optical Switch

OPB800 (L and W Series)



Features:

- 0.375” (9.525 mm) wide gap
- Choice of aperture size
- Choice of minimum photocurrent
- Choice of opaque or IR transmissive shells
- Available for PCBoard mounting or with 24” 26 AWG wires

Description:

The OPB800L series, PCBoard mounting, of wide gap switch provides the flexibility of a custom device from a standard product line, while the OPB800W series, remote mounted, switch offers 24” (610 mm) 26 AWG wire interconnect.

Building from a standard housing that utilizes a 0.375” (9.5 mm) wide slot, a user can specify the electrical output parameters, discrete shell material and the aperture width.

Housings are made from an opaque grade of injection-molded plastic that minimizes the assembly’s sensitivity to visible and near-infrared ambient radiation. Discrete shells, which are exposed on parallel faces inside the device throat, are made of IR transmissive plastic (for applications where aperture contamination may occur) or of opaque plastic with aperture openings (for maximum protection against ambient light).

Applications:

- Non-contact interruptive object sensing
- Assembly line automation
- Machine automation
- Equipment security
- Machine safety

Part Number Guide

OPB 8 X X X X X Z

Optek Assembly

Phototransistor Output Family

Discrete Shell Material:
0 — Transmissive plastic Discrete shell
1 — Opaque plastic Discrete shell

Electrical Specification Variations:
0 = Electrical Parameter A
1 = Electrical Parameter B
2 = Electrical Parameter C

For “W” series only
Sensor Aperture:
1 — 0.010” (.254 mm)
5 — 0.050” (1.270 mm)

Emitter Aperture:
5 — 0.050” (1.270 mm)

Mounting configurations:
L — Solder lead termination
W — Wire termination

Note: Assemblies with 0.010” apertures are currently available with electrical parameter “A” only.
Wires = 26AWG—24” Long

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 |Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Storage and Operating Temperature L Series W Series	 -40° C to +85° C -40° C to +80° C
Lead Soldering Temperature [1/16 inch (1.6mm) from the case for 5 sec. with soldering iron][2]	260° C

Input Diode

Forward DC Current	50 mA
Peak Forward Current (1 µs pulse width, 300 pps)	3 A
Reverse DC Voltage	2 V
Power Dissipation[1]	100 mW

Output Phototransistor

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Collector DC Current	30 mA
Power Dissipation[1]	100 mW

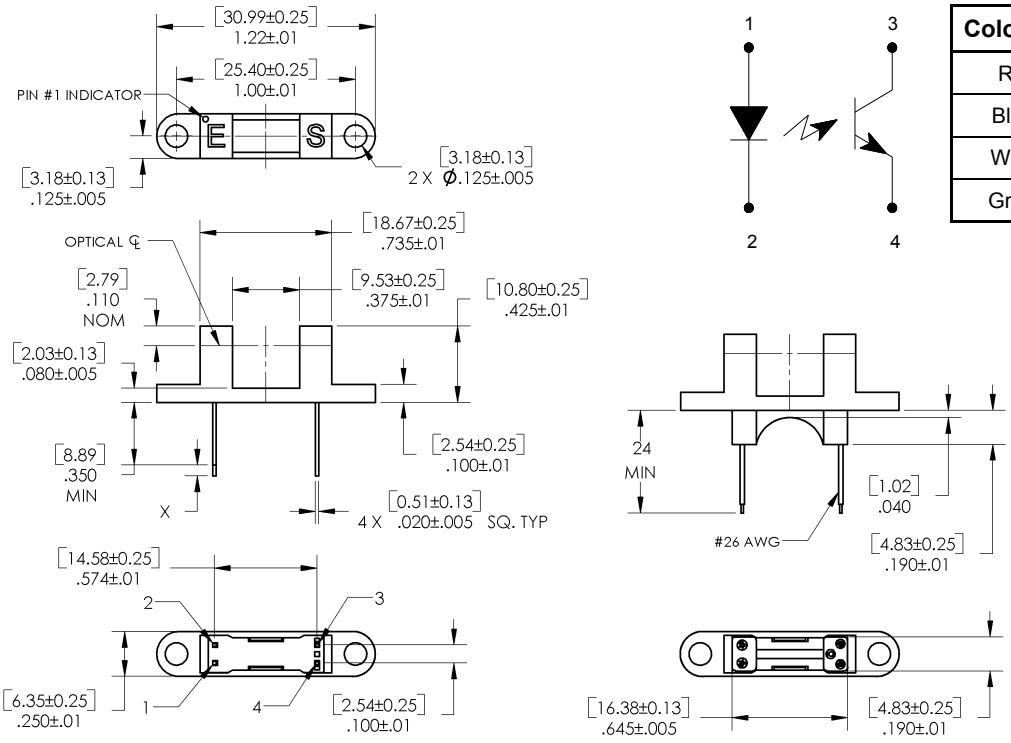

Color/Pin #	Description
Red-1	Anode
Black-2	Cathode
White-3	Collector
Green-4	Emitter

DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 |Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com