

FWH

6x32mm high speed ferrule fuses



Catalog symbols:

- FWH-(amp)A6F
- FWH-(amp)A6FR (RoHS compliant)
- FWH5-(amp)A6F
- FWH5-(amp)A6FR (RoHS compliant)

Description:

Eaton's Bussmann® series of FWH 6x32mm ferrule high speed fuses are for the protection of DC common bus, DC drives, power converters/rectifiers and reduced rated voltage starters.

Specification:

Ratings

- Volts
 - 500Vac (0.25-1A and 3.15-30A)
 - 1000Vac (2A)
 - 600Vdc (1-5A)
- Amps
 - 0.25-30A
- Interrupting rating
 - 50kA AC (0.25-1A and 3.15-20A)
 - 30kA AC (2A)
 - 20kA AC (25-30A)
 - 50kA DC (1-5A)


Agency information

- CE
- RoHS compliant
- UL® Recognized JFHR2, E91958, 0.25-7A
- UL Recognized JDYX2, E19180, 10-30A
- CSA® Component Acceptance file Class 1422-30, 1422-90 (53787) 0.25-7A

Opening times:

Amp range	150%	200%	300%
0.25-7A	> 30 min.	> 30 min.	≤ 10 sec.
10-30A	> 30 min.	> 30 min.	≤ 10 sec.

Dimensions:

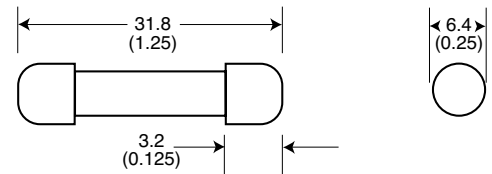

Features:

- Low watts loss in a compact size
- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)

Typical applications:

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters



Powering Business Worldwide

Catalog numbers:

Rated voltage		I ² t (A ² s)				Catalog numbers		
Amps	Vac	Vdc	Pre-arcing	Clearing @ 500Vac	Watts loss (W)	Standard	RoHS compliant	
0.25	500	—	0.01	0.05	2.7	FWH-250A6F	FWH-250A6F	
0.5	500	—	0.05	0.25	1.2	FWH-500A6F	FWH-500A6F	
1	500	600	0.4	2	1.7	FWH-001A6F	FWH-001A6F	
2	1000	600	1.3	3.5	3.2	FWH-002A6F	FWH-002A6F	
3.15	500	600	3.1	7.7	2.9	FWH-3.15A6F	FWH-3.15A6F	
4	500	600	—	—	—	FWH-004A6F	FWH-004A6F	
5	500	600	15	40	2.1	FWH-005A6F	FWH-005A6F	
6.3	500	—	36	90	2.3	FWH-6.30A6F	FWH-6.30A6F	
7	500	—	50	125	2.5	FWH-007A6F	FWH-007A6F	
10	500	—	9.9	139	2.86	FWH5-010A6F	FWH5-010A6FR	
12.5	500	—	20	60	3.53	FWH5-12-5A6F	FWH5-12-5A6FR	
15	500	—	44	146	3.08	FWH5-015A6F	FWH5-015A6FR	
16	500	—	48	177	4.48	FWH5-016A6F	FWH5-016A6FR	
20	500	—	75	259	4.26	FWH5-020A6F	FWH5-020A6FR	
25	500	—	126	345	—	FWH-025A6F	FWH-025A6FR	
30	500	—	145	430	—	FWH-030A6F	FWH-030A6FR	

0.25-7A 300% minimum opening current at rated voltage.

10-30A 200% minimum opening current at rated voltage.

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton
 1000 Eaton Boulevard
 Cleveland, OH 44122
 United States
 Eaton.com

Bussmann Division
 114 Old State Road
 Ellisville, MO 63021
 United States
 Eaton.com/bussmannseries

© 2015 Eaton
 All Rights Reserved
 Printed in USA
 Publication No. 720038 — BU-SB15288
 December 2015

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.
 UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.

