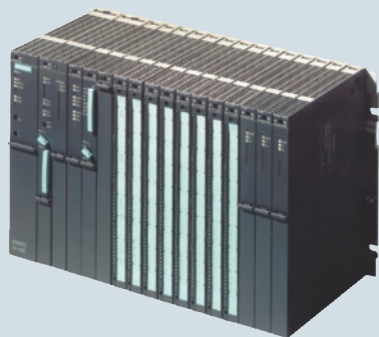


## SIMATIC S7-400

**6/2 Introduction****6/4 Central processing units**

6/4	Standard CPUs
6/4	CPU 412
6/8	CPU 414
6/13	CPU 416
6/18	CPU 417
6/21	SIPLUS Standard CPUs
6/21	SIPLUS CPU 412
6/22	SIPLUS CPU 414
6/23	SIPLUS CPU 416
6/25	SIPLUS CPU 417
6/26	Fail-safe CPUs
6/26	CPU 414F
6/30	CPU 416F
6/35	High-availability CPUs
6/35	CPU 412H
6/35	CPU 414H
6/35	CPU 416H
6/35	CPU 417H
6/41	Sync-module for coupling the CPU 41xH
6/42	Y-link for S7-400H
6/45	SIPLUS high-availability CPUs
6/45	SIPLUS CPU 412H
6/47	SIPLUS CPU 414H
6/49	SIPLUS CPU 417H
6/51	SIPLUS sync module for connecting the CPU 41xH
6/53	SIPLUS Y-Link for S7-400H
6/54	Interface modules PROFIBUS IF-964 DP module
6/55	SIPLUS PROFIBUS IF-964 DP module

**6/56 Digital modules**

6/56	SM 421 digital input module
6/59	SM 422 digital output module

**6/62 SIPLUS digital modules****6/64 Analog modules**

6/64	SM 431 analog input module
6/73	SM 432 analog output module

**6/75 SIPLUS analog modules****6/77 Function modules**

6/77	FM 450-1 counter module
6/79	FM 451 positioning module
6/81	FM 452 cam controller
6/83	FM 453 positioning module
6/85	FM 455 controller module
6/90	FM 458-1 DP application module

**6/101 SIPLUS function modules****6/103 Communication**

6/103	CP 440
6/104	CP 441-1, CP 441-2
6/106	Loadable drivers for CP 441-2 and CP 341
6/108	CP 443-5 Basic
6/110	CP 443-5 Extended
6/112	CP 443-1
6/115	CP 443-1 Advanced
6/120	SCALANCE M87x UMTS router

**6/125 SIPLUS communication****6/128 Connection methods**

6/128	Front connectors
6/129	SIMATIC TOP connect for SIMATIC S7-400

**6/131 Racks**

6/131	Racks
6/133	Fan subassembly

**6/134 SIPLUS racks****6/135 Interface modules**

6/135	IM 460-0
6/136	IM 461-0
6/137	IM 460-1
6/138	IM 461-1
6/139	IM 460-3
6/140	IM 461-3
6/141	IM 463-2

**6/142 SIPLUS interface modules****6/144 Power supplies****6/148 SIPLUS power supplies****6/149 Accessories**

6/149	Labeling sheets
6/150	Spare parts

**6/151 Modules for SIMATIC S7-400F/FH**

6/151	IM 153-1/153-2
6/154	SIPLUS IM 153-1/153-2
6/156	Isolation modules
6/157	SIPLUS isolation modules
6/158	Fail-safe I/O modules

**Brochures**

For brochures serving as selection guides for SIMATIC products refer to:

<http://www.siemens.com/simatic/printmaterial>

# SIMATIC S7-400

## Introduction

### S7-400/S7-400H/S7-400F/FH

#### Overview

The S7-400 is the most powerful PLC in the family of SIMATIC controllers. It enables successful automation solutions with Totally Integrated Automation (TIA). The S7-400 is an automation platform for system solutions in production and process engineering, and it is characterized primarily by its modularity and performance reserves.




#### S7-400H

- Fault-tolerant automation system with redundant design.
- For applications with high fail-safety requirements. Processes with high restart costs, expensive downtimes, little supervision, and few maintenance options.
- Redundant central functions.
- Increases availability of I/O: switched I/O configuration.
- Also possible to use I/Os with standard availability: single-sided configuration.
- Hot stand-by: automatic reaction-free switching to the standby unit in the event of a fault.
- Configuration with two separate or one divided central rack.
- Connection of switched I/O via redundant PROFIBUS DP.

#### S7-400

- The power PLC for the mid to high-end performance ranges.
- The solution for even the most demanding tasks.
- With a comprehensive range of modules and performance-graded CPUs for optimal adaptation to the automation task.
- Flexible in use through simple implementation of distributed structures; user-friendly connections.
- Optimal communication and networking options.
- User-friendly handling and uncomplicated design without a fan.
- Can be expanded without problems when the tasks increase.
- Multicomputing:  
Simultaneous operation of several CPUs in one S7-400 central controller.  
Multicomputing distributes the overall performance power of an S7-400. For example, complex tasks can be divided into technologies such as open-loop control, computing or communication, and assigned to different CPUs. And every CPU can be assigned its own local I/O.
- Modularity:  
The powerful backplane bus of the S7-400 and the communication interfaces that can be connected direct to the CPU enable high-performance operation of a host of communication lines. This enables, for example, division into one communication path for HMI and programming tasks, one for high-performance and equidistant motion control components, and one for a "normal" I/O fieldbus. Additionally required connections to MES/ERP systems or the Internet can also be implemented.
- Engineering and diagnostics:  
The S7-400 is configured and programmed extremely efficiently together with the SIMATIC Engineering Tools particularly in the case of extensive automation solutions with a high engineering component. For this purpose, high-level languages such as SCL and graphical engineering tools for sequential controls, state graph programs and technology-oriented diagrams are available, for example.

### Overview (continued)

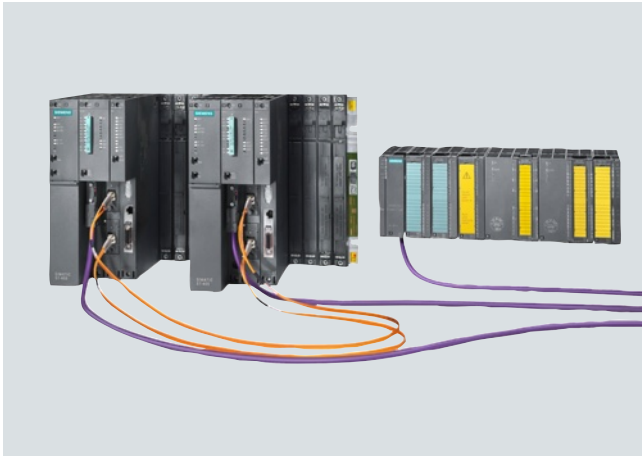

#### S7-400F/FH

- Failsafe automation system for plants with increased safety requirements
- Complies with safety requirements to SIL 3 in accordance with IEC 61508, AK6 in accordance with DIN V 19250 and Cat. 4 in accordance with EN 954-1
- If required, also fault tolerant through redundant design
- Without additional wiring of the safety-related I/O:
- Safety-relevant communication via PROFIBUS DP with PROFIsafe profile
- Based on S7-400H and ET 200M with fail-safe modules
- Standard modules for non-safety-related applications can also be used in the automation system
- Isolation module for joint use of fail-safe and standard modules in safety mode in one ET 200M

### Technical specifications

General technical data	
Degree of protection	IP20
Ambient temperature	0 to 60 °C
Relative humidity	5 to 95%, no condensation
Atmospheric pressure	1080 to 795 hPa (corresponds to an altitude of 1000 m to 2000 m)
Electromagnetic compatibility	
• Interference immunity	According to EN 61000-6-2
• Emitted interference	According to EN 61000-6-4
Mechanical load	
• Vibration, test according to / tested with	IEC 60068-2-6 (sine) 10 to 58 Hz; constant amplitude 0.075 mm; 58 to 500 Hz; constant acceleration 1 g; duration of oscillation: 10 frequency sweeps per axis in each direction of the three mutually perpendicular axes
• Shock, test according to / tested with	IEC 60068-2-27 Type of shock: Half-sine; strength of the shock 10 g (peak value), duration 6 ms direction of shock: 100 shocks in each of the 3 mutually perpendicular axes.

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 412

#### Overview



- The low-cost starter solution for the medium performance range
- Can be used in small and medium-sized systems with requirements of the medium performance range

#### Technical specifications

	6ES7 412-1XJ05-0AB0 CPU 412-1	6ES7 412-2XJ05-0AB0 CPU 412-2	6ES7 412-2EK06-0AB0 CPU 412-2 PN
<b>General information</b>			
Engineering with			
• Programming package	STEP7 V 5.3 SP2 or higher with HW update	STEP7 V 5.3 SP2 or higher with HW update	STEP7 V5.5 or higher/iMap V3.0 + iMap STEP7 Add-on V3.0 SP5 or higher
<b>Supply voltage</b>			
24 V DC	No; Power supply via system power supply	No; Power supply via system power supply	No; Power supply via system power supply
<b>Power losses</b>			
Power loss, typ.	2.5 W	4.5 W	5.5 W
<b>Memory</b>			
Work memory			
• integrated	288 kbyte	512 kbyte	1 Mbyte
• integrated (for program)	144 kbyte	256 kbyte	0.5 Mbyte
• integrated (for data)	144 kbyte	256 kbyte	0.5 Mbyte
Load memory			
• expandable FEPRAM, max.	64 Mbyte	64 Mbyte	64 Mbyte
• integrated RAM, max.	512 kbyte	512 kbyte	512 kbyte
• expandable RAM, max.	64 Mbyte	64 Mbyte	64 Mbyte
<b>CPU processing times</b>			
for bit operations, typ.	75 ns	75 ns	75 ns
for word operations, typ.	75 ns	75 ns	75 ns
for fixed point arithmetic, typ.	75 ns	75 ns	75 ns
for floating point arithmetic, typ.	225 ns	225 ns	225 ns
<b>Counters, timers and their retentivity</b>			
S7 counter			
• Number	2 048	2 048	2 048
IEC counter			
• present	Yes	Yes	Yes
S7 times			
• Number	2 048	2 048	2 048
IEC timer			
• present	Yes	Yes	Yes

**Technical specifications** (continued)

	<b>6ES7 412-1XJ05-0AB0</b> <b>CPU 412-1</b>	<b>6ES7 412-2XJ05-0AB0</b> <b>CPU 412-2</b>	<b>6ES7 412-2EK06-0AB0</b> <b>CPU 412-2 PN</b>
<b>Data areas and their retentivity</b>			
Flag			
• Number, max.	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area
<b>Address area</b>			
I/O address area			
• Inputs	4 kbyte	4 kbyte	4 kbyte
• Outputs	4 kbyte	4 kbyte	4 kbyte
Process image			
• Inputs, adjustable	4 kbyte	4 kbyte	4 kbyte
• Outputs, adjustable	4 kbyte	4 kbyte	4 kbyte
<b>Time of day</b>			
Clock			
• Hardware clock (real-time clock)	Yes	Yes	Yes
Operating hours counter			
• Number	16	16	16
<b>1st interface</b>			
Type of interface	integrated	integrated	integrated
Physics	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI
Functionality			
• MPI	Yes	Yes	Yes
• DP master	Yes	Yes	Yes
• DP slave	Yes	Yes	Yes
DP master			
• Number of DP slaves, max.	32	32	32
<b>2nd interface</b>			
Type of interface		integrated	PROFINET
Physics		RS 485 / PROFIBUS	Ethernet RJ45
Number of ports			2
Functionality			
• DP master		Yes	No
• DP slave		Yes	No
• PROFINET IO Controller			Yes
• PROFINET IO Device			Yes
• PROFINET CBA			Yes
DP master			
• Number of DP slaves, max.		64	
PROFINET IO Controller			
• Max. number of connectable IO devices for RT			256
• Number of IO devices with IRT and the option "high flexibility"			256
• Number of IO Devices with IRT and the option "high performance", max.			64
<b>Isochronous mode</b>			
Isochronous operation (application synchronized up to terminal)	Yes; For PROFIBUS only	Yes; For PROFIBUS only	Yes; Via PROFIBUS DP or PROFINET interface

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 412

#### Technical specifications (continued)

	6ES7 412-1XJ05-0AB0 CPU 412-1	6ES7 412-2XJ05-0AB0 CPU 412-2	6ES7 412-2EK06-0AB0 CPU 412-2 PN
<b>Communication functions</b>			
PG/OP communication	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes
Global data communication			
• supported	Yes	Yes	Yes
S7 basic communication			
• supported	Yes	Yes	Yes
S7 communication			
• supported	Yes	Yes	Yes
S5-compatible communication			
• supported	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5
Standard communication (FMS)			
• supported	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB
Open IE communication			
• TCP/IP			Yes; via integrated PROFINET interface and loadable FBs 46
- Number of connections, max.			Yes; Via integrated PROFINET interface or CP 443-1 Adv. and loadable FBs 46
• ISO-on-TCP (RFC1006)	Via CP 443-1 Adv. and loadable FB	Via CP 443-1 and loadable FB	Yes; via integrated PROFINET interface and loadable FBs 46
- Number of connections, max.			Yes; via integrated PROFINET interface and loadable FBs 46
• UDP			
- Number of connections, max.			
Web server			
• supported	No	No	Yes
Number of connections			
• overall	32	32	48
<b>Configuration</b>			
programming			
• Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes
Know-how protection			
• User program protection/password protection	Yes	Yes	Yes
• Block encryption			Yes; With S7 block Privacy
<b>Dimensions</b>			
Width	25 mm	25 mm	25 mm
Height	290 mm	290 mm	290 mm
Depth	219 mm	219 mm	219 mm
Required slots	1	1	1
<b>Weight</b>			
Weight, approx.	0.7 kg	0.7 kg	750 g

# SIMATIC S7-400

## Central processing units

Standard CPUs  
CPU 412

Ordering data	Order No.	Order No.
<b>CPU 412-1</b> Main memory 288 KB, power supply 24 V DC, MPI/PROFIBUS DP master interface, slot for memory card, incl. slot number labels	<b>6ES7 412-1XJ05-0AB0</b>	<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC
<b>CPU 412-2</b> Main memory 512 KB, power supply 24 V DC, MPI/PROFIBUS DP master interface, slot for memory card, incl. slot number labels	<b>6ES7 412-2XJ05-0AB0</b>	<b>6ES7 998-8XC01-8YE0</b>
<b>CPU 412-2 PN</b> Main memory 1 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, slot for memory card, incl. slot number labels	<b>6ES7 412-2EK06-0AB0</b>	<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates
<b>Memory card RAM</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 64 MB	<b>6ES7 952-0AF00-0AA0</b> <b>6ES7 952-1AH00-0AA0</b> <b>6ES7 952-1AK00-0AA0</b> <b>6ES7 952-1AL00-0AA0</b> <b>6ES7 952-1AM00-0AA0</b> <b>6ES7 952-1AP00-0AA0</b> <b>6ES7 952-1AS00-0AA0</b> <b>6ES7 952-1AY00-0AA0</b>	<b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface <b>6ES7 972-0BA12-0XA0</b> With PG interface <b>6ES7 972-0BB12-0XA0</b>
<b>FEPR0M memory card</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 32 MB 64 MB	<b>6ES7 952-0KF00-0AA0</b> <b>6ES7 952-0KH00-0AA0</b> <b>6ES7 952-1KK00-0AA0</b> <b>6ES7 952-1KL00-0AA0</b> <b>6ES7 952-1KM00-0AA0</b> <b>6ES7 952-1KP00-0AA0</b> <b>6ES7 952-1KS00-0AA0</b> <b>6ES7 952-1KT00-0AA0</b> <b>6ES7 952-1KY00-0AA0</b>	<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface <b>6ES7 972-0BA42-0XA0</b> With PG interface <b>6ES7 972-0BB42-0XA0</b>
<b>MPI cable</b> for connection of SIMATIC S7 and PG via MPI; 5 m in length	<b>6ES7 901-0BF00-0AA0</b>	<b>RS 485 bus connector with 90° cable outlet for FastConnect connection system</b> Max. transfer rate 12 Mbit/s Without PG interface • 1 unit <b>6ES7 972-0BA52-0XA0</b> • 100 units <b>6ES7 972-0BA52-0XB0</b> With PG interface • 1 unit <b>6ES7 972-0BB52-0XA0</b> • 100 units <b>6ES7 972-0BB52-0XB0</b>
<b>Slot number plates</b> 1 set (spare part)	<b>6ES7 912-0AA00-0AA0</b>	<b>RS 485 bus connector with axial cable outlet</b> For SIMATIC OP, for connection to PPI, MPI, PROFIBUS <b>6GK1 500-0EA02</b>
		<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m <b>6XV1 830-0EH10</b>

# SIMATIC S7-400

## Central processing units

Standard CPUs  
CPU 414

### Overview



- CPUs for high demands in the mid-level performance range
- Applicable for plants with additional demands on programming scope and processing speed
- Integrated PROFINET functions in CPU 414-3 PN/DP

### Technical specifications

	6ES7 414-2XK05-0AB0 CPU 414-2	6ES7 414-3XM05-0AB0 CPU 414-3	6ES7 414-3EM06-0AB0 CPU 414-3 PN/DP
<b>General information</b> Engineering with • Programming package	STEP7 V 5.3 SP2 or higher with HW update	STEP7 V 5.3 SP2 or higher with HW update	STEP7 V5.5 or higher/iMap V3.0 + iMap STEP7 Add-on V3.0 SP5 or higher
<b>Supply voltage</b> 24 V DC	No; Power supply via system power supply	No; Power supply via system power supply	No; Power supply via system power supply
<b>Power losses</b> Power loss, typ.	4.5 W	5.5 W	6.5 W
<b>Memory</b> Work memory • integrated • integrated (for program) • integrated (for data)	1 Mbyte 0.5 Mbyte 0.5 Mbyte	2.8 Mbyte 1.4 Mbyte 1.4 Mbyte	4 Mbyte 2 Mbyte 2 Mbyte
Load memory • expandable FEPRAM, max. • integrated RAM, max. • expandable RAM, max.	64 Mbyte 512 kbyte 64 Mbyte	64 Mbyte 512 kbyte 64 Mbyte	64 Mbyte 512 kbyte 64 Mbyte
<b>CPU processing times</b> for bit operations, typ.	45 ns	45 ns	45 ns
for word operations, typ.	45 ns	45 ns	45 ns
for fixed point arithmetic, typ.	45 ns	45 ns	45 ns
for floating point arithmetic, typ.	135 ns	135 ns	135 ns
<b>Counters, timers and their retentivity</b> S7 counter • Number	2 048	2 048	2 048
IEC counter • present	Yes	Yes	Yes
S7 times • Number	2 048	2 048	2 048
IEC timer • present	Yes	Yes	Yes

6



**Technical specifications (continued)**

	<b>6ES7 414-2XK05-0AB0 CPU 414-2</b>	<b>6ES7 414-3XM05-0AB0 CPU 414-3</b>	<b>6ES7 414-3EM06-0AB0 CPU 414-3 PN/DP</b>
<b>Data areas and their retentivity</b>			
Flag			
• Number, max.	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area
<b>Address area</b>			
I/O address area			
• Inputs	8 kbyte	8 kbyte	8 kbyte
• Outputs	8 kbyte	8 kbyte	8 kbyte
Process image			
• Inputs, adjustable	8 kbyte	8 kbyte	8 kbyte
• Outputs, adjustable	8 kbyte	8 kbyte	8 kbyte
<b>Time of day</b>			
Clock			
• Hardware clock (real-time clock)	Yes	Yes	Yes
Operating hours counter			
• Number	16	16	16
<b>1st interface</b>			
Type of interface	integrated	integrated	integrated
Physics	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI
Functionality			
• MPI	Yes	Yes	Yes
• DP master	Yes	Yes	Yes
• DP slave	Yes	Yes	Yes
DP master			
• Number of DP slaves, max.	32	32	32
<b>2nd interface</b>			
Type of interface	integrated	integrated	PROFINET
Physics	RS 485 / PROFIBUS	RS 485 / PROFIBUS	Ethernet RJ45
Number of ports			2
Functionality			
• DP master	Yes	Yes	No
• DP slave	Yes	Yes	No
• PROFINET IO Controller			Yes
• PROFINET IO Device			Yes
• PROFINET CBA			Yes
DP master			
• Number of DP slaves, max.	96	96	
PROFINET IO Controller			
• Max. number of connectable IO devices for RT			256
• Number of IO devices with IRT and the option "high flexibility"			256
• Number of IO Devices with IRT and the option "high performance", max.			64
<b>3rd interface</b>			
Type of interface		Pluggable interface module (IF), technical data as for 2nd interface	Pluggable interface module (IF)
Plug-in interface modules		IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)	IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)
Physics		RS 485 / PROFIBUS	RS 485 / PROFIBUS
Functionality			
• MPI		No	No
• DP master		Yes	Yes
• DP slave		Yes	Yes
DP master			
• Number of DP slaves, max.		96	96

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 414

#### Technical specifications (continued)

	6ES7 414-2XK05-0AB0 CPU 414-2	6ES7 414-3XM05-0AB0 CPU 414-3	6ES7 414-3EM06-0AB0 CPU 414-3 PN/DP
<b>Isochronous mode</b>			
Isochronous operation (application synchronized up to terminal)	Yes; For PROFIBUS only	Yes; For PROFIBUS only	Yes; Via PROFIBUS DP or PROFINET interface
<b>Communication functions</b>			
PG/OP communication	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes
Global data communication			
• supported	Yes	Yes	Yes
S7 basic communication			
• supported	Yes	Yes	Yes
S7 communication			
• supported	Yes	Yes	Yes
S5-compatible communication			
• supported	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5
Standard communication (FMS)			
• supported	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB
Open IE communication			
• TCP/IP			Yes; via integrated PROFINET interface and loadable FBs 62
- Number of connections, max.			Yes; Via integrated PROFINET interface or CP 443-1 Adv. and loadable FBs 62
• ISO-on-TCP (RFC1006)	Via CP 443-1 and loadable FB	Via CP 443-1 and loadable FB	Yes; via integrated PROFINET interface and loadable FBs 62
- Number of connections, max.			62
• UDP			Yes; via integrated PROFINET interface and loadable FBs 62
- Number of connections, max.			62
Web server			
• supported	No	No	Yes
Number of connections			
• overall	32	32	64
<b>Configuration</b>			
programming			
• Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes
Know-how protection			
• User program protection/password protection	Yes	Yes	Yes
• Block encryption			Yes; With S7 block Privacy
<b>Dimensions</b>			
Width	25 mm	50 mm	50 mm
Height	290 mm	290 mm	290 mm
Depth	219 mm	219 mm	219 mm
Required slots	1	2	2
<b>Weight</b>			
Weight, approx.	0.7 kg	0.9 kg	900 g

# SIMATIC S7-400

## Central processing units

Standard CPUs  
CPU 414

Ordering data	Order No.	Order No.
<b>CPU 414-2</b> Main memory 1 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, slot for memory card, incl. slot number labels	<b>6ES7 414-2XK05-0AB0</b>	<b>Slot number plates</b> 1 set (spare part)
<b>CPU 414-3</b> Main memory 2.8 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, slot for memory card, module slots for 1 IF module, incl. slot number labels	<b>6ES7 414-3XM05-0AB0</b>	<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC
<b>CPU 414-3 PN/DP</b> Main memory 4 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, slot for memory card, module slot for 1 IF module, incl. slot number labels	<b>6ES7 414-3EM06-0AB0</b>	<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates
<b>Memory card RAM</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 64 MB	<b>6ES7 952-0AF00-0AA0</b> <b>6ES7 952-1AH00-0AA0</b> <b>6ES7 952-1AK00-0AA0</b> <b>6ES7 952-1AL00-0AA0</b> <b>6ES7 952-1AM00-0AA0</b> <b>6ES7 952-1AP00-0AA0</b> <b>6ES7 952-1AS00-0AA0</b> <b>6ES7 952-1AY00-0AA0</b>	<b>PROFIBUS bus components</b> <b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface
<b>FEEPROM memory card</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 32 MB 64 MB	<b>6ES7 952-0KF00-0AA0</b> <b>6ES7 952-0KH00-0AA0</b> <b>6ES7 952-1KK00-0AA0</b> <b>6ES7 952-1KL00-0AA0</b> <b>6ES7 952-1KM00-0AA0</b> <b>6ES7 952-1KP00-0AA0</b> <b>6ES7 952-1KS00-0AA0</b> <b>6ES7 952-1KT00-0AA0</b> <b>6ES7 952-1KY00-0AA0</b>	<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface
<b>MPI cable</b> For connection of SIMATIC S7 and PG via MPI; 5 m in length	<b>6ES7 901-0BF00-0AA0</b>	<b>RS 485 bus connector with 90° cable outlet for FastConnect connection system</b> Max. transfer rate 12 Mbit/s Without PG interface • 1 unit • 100 units With PG interface • 1 unit • 100 units
<b>IF 964-DP interface module</b> To connect an additional DP line; for CPU 414-3, CPU 414-3 PN/DP, CPU 416-3, CPU 416-3 PN/DP, CPU 417-4	<b>6ES7 964-2AA04-0AB0</b>	<b>RS 485 bus connector with axial cable outlet</b> For SIMATIC OP, for connection to PPI, MPI, PROFIBUS
		<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m
		<b>RS 485 repeater for PROFIBUS</b> Transmission rate up to 12 Mbit/s; 24 V DC; IP20 enclosure

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 414

Ordering data	Order No.		Order No.
<b>PROFINET bus components</b>			
<b>IE FC TP standard cable GP 2x2</b> 4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/ IE FC RJ45 Plug; PROFINET-compatible; with UL approval; Sold by the meter	<b>6XV1 840-2AH10</b>	<b>IE FC RJ45 plugs</b> RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables	
<b>FO Standard Cable GP (50/125)</b> Standard cable, splittable, UL approval, sold by the meter	<b>6XV1 873-2A</b>	<b>IE FC RJ45 plug 180</b> 180° cable outlet 1 unit 10 units 50 units	<b>6GK1 901-1BB10-2AA0</b> <b>6GK1 901-1BB10-2AB0</b> <b>6GK1 901-1BB10-2AE0</b>
<b>SCALANCE X204-2 Industrial Ethernet switch</b> Industrial Ethernet Switches with integral SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two FO ports	<b>6GK5 204-2BB10-2AA3</b>	<b>PROFIBUS/PROFINET bus components</b> For establishing MPI/PROFIBUS/PROFINET communication	See IK PI, CA 01 catalogs

### Overview



- High-performance CPUs in the high-end performance range
- Applicable for plants with high requirements in the high-end performance range
- Integrated PROFINET functions in CPU 416-3 PN/DP

### Technical specifications

	<b>6ES7 416-2XN05-0AB0</b> <b>CPU 416-2</b>	<b>6ES7 416-3XR05-0AB0</b> <b>CPU 416-3</b>	<b>6ES7 416-3ES06-0AB0</b> <b>CPU416-3 PN/DP</b>
<b>General information</b> Engineering with • Programming package	STEP7 V 5.3 SP2 or higher with HW update	STEP7 V 5.3 SP2 or higher with HW update	STEP7 V5.5 or higher/iMap V3.0 + iMap STEP7 Add-on V3.0 SP5 or higher
<b>Supply voltage</b> 24 V DC	No; Power supply via system power supply	No; Power supply via system power supply	No; Power supply via system power supply
<b>Power losses</b> Power loss, typ.	4.5 W	5.5 W	6.5 W
<b>Memory</b> Work memory • integrated • integrated (for program) • integrated (for data)	5.6 Mbyte 2.8 Mbyte 2.8 Mbyte	11.2 Mbyte 5.6 Mbyte 5.6 Mbyte	16 Mbyte 8 Mbyte 8 Mbyte
Load memory • expandable FEPRM, max. • integrated RAM, max. • expandable RAM, max.	64 Mbyte 1 Mbyte 64 Mbyte	64 Mbyte 1 Mbyte 64 Mbyte	64 Mbyte 1 Mbyte 64 Mbyte
<b>CPU processing times</b> for bit operations, typ.	30 ns	30 ns	30 ns
for word operations, typ.	30 ns	30 ns	30 ns
for fixed point arithmetic, typ.	30 ns	30 ns	30 ns
for floating point arithmetic, typ.	90 ns	90 ns	90 ns
<b>Counters, timers and their retentivity</b> S7 counter • Number	2 048	2 048	2 048
IEC counter • present	Yes	Yes	Yes
S7 times • Number	2 048	2 048	2 048
IEC timer • present	Yes	Yes	Yes

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 416

#### Technical specifications (continued)

	6ES7 416-2XN05-0AB0 CPU 416-2	6ES7 416-3XR05-0AB0 CPU 416-3	6ES7 416-3ES06-0AB0 CPU416-3 PN/DP
<b>Data areas and their retentivity</b>			
Flag			
• Number, max.	16 kbyte; Size of bit memory address area	16 kbyte; Size of bit memory address area	16 kbyte; Size of bit memory address area
<b>Address area</b>			
I/O address area			
• Inputs	16 kbyte	16 kbyte	16 kbyte
• Outputs	16 kbyte	16 kbyte	16 kbyte
Process image			
• Inputs, adjustable	16 kbyte	16 kbyte	16 kbyte
• Outputs, adjustable	16 kbyte	16 kbyte	16 kbyte
<b>Time of day</b>			
Clock			
• Hardware clock (real-time clock)	Yes	Yes	Yes
Operating hours counter			
• Number	16	16	16
<b>1st interface</b>			
Type of interface	integrated	integrated	integrated
Physics	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI
Functionality			
• MPI	Yes	Yes	Yes
• DP master	Yes	Yes	Yes
• DP slave	Yes	Yes	Yes
DP master			
• Number of DP slaves, max.	32	32	32
<b>2nd interface</b>			
Type of interface	integrated	integrated	PROFINET
Physics	RS 485 / PROFIBUS	RS 485 / PROFIBUS	Ethernet RJ45
Number of ports			2
Functionality			
• DP master	Yes	Yes	No
• DP slave	Yes	Yes	No
• PROFINET IO Controller			Yes
• PROFINET IO Device			Yes
• PROFINET CBA			Yes
DP master			
• Number of DP slaves, max.	125	125	
PROFINET IO Controller			
• Max. number of connectable IO devices for RT			256
• Number of IO devices with IRT and the option "high flexibility"			256
• Number of IO Devices with IRT and the option "high performance", max.			64
<b>3rd interface</b>			
Type of interface		Pluggable interface module (IF), technical data as for 2nd interface	Pluggable interface module (IF)
Plug-in interface modules		IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)	IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)
Physics		RS 485 / PROFIBUS	RS 485 / PROFIBUS
Functionality			
• MPI		No	No
• DP master		Yes	Yes
• DP slave		Yes	Yes
DP master			
• Number of DP slaves, max.		125	125

**Technical specifications** (continued)

	<b>6ES7 416-2XN05-0AB0</b> <b>CPU 416-2</b>	<b>6ES7 416-3XR05-0AB0</b> <b>CPU 416-3</b>	<b>6ES7 416-3ES06-0AB0</b> <b>CPU416-3 PN/DP</b>
<b>Isochronous mode</b>			
Isochronous operation (application synchronized up to terminal)	Yes; For PROFIBUS only	Yes; For PROFIBUS only	Yes; Via PROFIBUS DP or PROFINET interface
<b>Communication functions</b>			
PG/OP communication	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes
Global data communication			
• supported	Yes	Yes	Yes
S7 basic communication			
• supported	Yes	Yes	Yes
S7 communication			
• supported	Yes	Yes	Yes
S5-compatible communication			
• supported	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5
Standard communication (FMS)			
• supported	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB
Open IE communication			
• TCP/IP			Yes; via integrated PROFINET interface and loadable FBs 94
- Number of connections, max.			94
• ISO-on-TCP (RFC1006)	Via CP 443-1 and loadable FB	Via CP 443-1 and loadable FB	Yes; Via integrated PROFINET interface or CP 443-1 and loadable FBs 94
- Number of connections, max.			94
• UDP			Yes; via integrated PROFINET interface and loadable FBs 94
- Number of connections, max.			94
Web server			
• supported	No	No	Yes
Number of connections			
• overall	64	64	96
<b>Configuration</b>			
programming			
• Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes
Know-how protection			
• User program protection/password protection	Yes	Yes	Yes
• Block encryption			Yes; With S7 block Privacy
<b>Dimensions</b>			
Width	25 mm	50 mm	50 mm
Height	290 mm	290 mm	290 mm
Depth	219 mm	219 mm	219 mm
Required slots	1	2	2
<b>Weight</b>			
Weight, approx.	0.7 kg	0.9 kg	900 g

# SIMATIC S7-400

## Central processing units

### Standard CPUs CPU 416

#### Ordering data

##### CPU 416-2

Main memory 5.6 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, slot for memory card, incl. slot number labels

#### Order No.

6ES7 416-2XN05-0AB0

##### CPU 416-3

Main memory 11.2 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, module slot for 1 IF module, slot for memory card, incl. slot number labels

6ES7 416-3XR05-0AB0

##### CPU 416-3 PN/DP

Main memory 16 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, module slot for 1 IF submodule, slot for memory card, incl. slot number labels

6ES7 416-3ES06-0AB0

#### Memory card RAM

64 KB

6ES7 952-0AF00-0AA0

256 KB

6ES7 952-1AH00-0AA0

1 MB

6ES7 952-1AK00-0AA0

2 MB

6ES7 952-1AL00-0AA0

4 MB

6ES7 952-1AM00-0AA0

8 MB

6ES7 952-1AP00-0AA0

16 MB

6ES7 952-1AS00-0AA0

64 MB

6ES7 952-1AY00-0AA0

#### FEPR0M memory card

64 KB

6ES7 952-0KF00-0AA0

256 KB

6ES7 952-0KH00-0AA0

1 MB

6ES7 952-1KK00-0AA0

2 MB

6ES7 952-1KL00-0AA0

4 MB

6ES7 952-1KM00-0AA0

8 MB

6ES7 952-1KP00-0AA0

16 MB

6ES7 952-1KS00-0AA0

32 MB

6ES7 952-1KT00-0AA0

64 MB

6ES7 952-1KY00-0AA0

#### MPI cable

for connection of SIMATIC S7 and PG via MPI; 5 m in length

6ES7 901-0BF00-0AA0

#### IF 964-DP interface module

To connect an additional DP line; for CPU 414-3, CPU 414-3 PN/DP, CPU 416-3, CPU 416-3 PN/DP, CPU 417-4

6ES7 964-2AA04-0AB0

#### Slot number plates

1 set (spare part)

#### Order No.

6ES7 912-0AA00-0AA0

#### SIMATIC Manual Collection

Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC

6ES7 998-8XC01-8YE0

#### SIMATIC Manual Collection update service for 1 year

Current "Manual Collection" DVD and the three subsequent updates

6ES7 998-8XC01-8YE2

#### PROFIBUS bus components

##### RS 485 bus connector with 90° cable outlet

Max. transfer rate 12 Mbit/s

Without PG interface

6ES7 972-0BA12-0XA0

With PG interface

6ES7 972-0BB12-0XA0

##### RS 485 bus connector with angled cable outlet

Max. transfer rate 12 Mbit/s

Without PG interface

6ES7 972-0BA42-0XA0

With PG interface

6ES7 972-0BB42-0XA0

##### RS 485 bus connector with 90° cable outlet for FastConnect connection system

Max. transfer rate 12 Mbit/s

Without PG interface

- 1 unit
- 100 units

6ES7 972-0BA52-0XA0  
6ES7 972-0BA52-0XB0

With PG interface

- 1 unit
- 100 units

6ES7 972-0BB52-0XA0  
6ES7 972-0BB52-0XB0

##### RS 485 bus connector with axial cable outlet

For SIMATIC OP, for connection to PPI, MPI, PROFIBUS

6GK1 500-0EA02

#### PROFIBUS FastConnect bus cable

Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m

6XV1 830-0EH10

#### RS 485 repeater for PROFIBUS

Transmission rate up to 12 Mbit/s; 24 V DC; IP20 enclosure

6ES7 972-0AA02-0XA0



# SIMATIC S7-400

## Central processing units

Standard CPUs  
CPU 416

Ordering data	Order No.		Order No.
<b>PROFINET bus components</b>			
<b>IE FC TP standard cable GP 2x2</b> 4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/ IE FC RJ45 Plug; PROFINET-compatible; with UL approval; Sold by the meter	<b>6XV1 840-2AH10</b>	<b>IE FC RJ45 plugs</b> RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables	
<b>FO Standard Cable GP (50/125)</b> Standard cable, splittable, UL approval, sold by the meter	<b>6XV1 873-2A</b>	<b>IE FC RJ45 plug 180</b> 180° cable outlet 1 unit 10 units 50 units	<b>6GK1 901-1BB10-2AA0</b> <b>6GK1 901-1BB10-2AB0</b> <b>6GK1 901-1BB10-2AE0</b>
<b>SCALANCE X204-2 Industrial Ethernet switch</b> Industrial Ethernet Switches with integral SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two FO ports	<b>6GK5 204-2BB10-2AA3</b>	<b>PROFIBUS/PROFINET bus components</b> For establishing MPI/PROFIBUS/PROFINET communication	See IK PI, CA 01 catalogs

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 417

#### Overview



- The most powerful SIMATIC S7-400 CPU
- Can be used in the most sophisticated installations in the upper performance range
- With two slots for IF modules

#### Technical specifications

6ES7 417-4XT05-0AB0 CPU 417-4	
<b>General information</b>	
Engineering with	
• Programming package	STEP7 V 5.3 SP2 or higher with HW update
<b>Supply voltage</b>	
24 V DC	No; Power supply via system power supply
<b>Power losses</b>	
Power loss, typ.	7.5 W
<b>Memory</b>	
Work memory	
• integrated	30 Mbyte
• integrated (for program)	15 Mbyte
• integrated (for data)	15 Mbyte
Load memory	
• expandable FEPRAM, max.	64 Mbyte
• integrated RAM, max.	1 Mbyte
• expandable RAM, max.	64 Mbyte
<b>CPU processing times</b>	
for bit operations, typ.	18 ns
for word operations, typ.	18 ns
for fixed point arithmetic, typ.	18 ns
for floating point arithmetic, typ.	54 ns
<b>Counters, timers and their retentivity</b>	
S7 counter	
• Number	2 048
IEC counter	
• present	Yes
S7 times	
• Number	2 048
IEC timer	
• present	Yes

6ES7 417-4XT05-0AB0 CPU 417-4	
<b>Data areas and their retentivity</b>	
Flag	
• Number, max.	16 kbyte; Size of bit memory address area
<b>Address area</b>	
I/O address area	
• Inputs	16 kbyte
• Outputs	16 kbyte
Process image	
• Inputs, adjustable	16 kbyte
• Outputs, adjustable	16 kbyte
<b>Time of day</b>	
Clock	
• Hardware clock (real-time clock)	Yes
Operating hours counter	
• Number	16
<b>1st interface</b>	
Type of interface	integrated
Physics	RS 485 / PROFIBUS + MPI
Functionality	
• MPI	Yes
• DP master	Yes
• DP slave	Yes
DP master	
• Number of DP slaves, max.	32
<b>2nd interface</b>	
Type of interface	integrated
Physics	RS 485 / PROFIBUS
Functionality	
• DP master	Yes
• DP slave	Yes
DP master	
• Number of DP slaves, max.	125

**Technical specifications** (continued)

6ES7 417-4XT05-0AB0 CPU 417-4	
<b>3rd interface</b>	
Type of interface	Pluggable interface module (IF), technical data as for 2nd interface
Plug-in interface modules	IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)
Physics	RS 485 / PROFIBUS
Functionality	
• MPI	No
• DP master	Yes
• DP slave	Yes
DP master	
• Number of DP slaves, max.	125
<b>4th interface</b>	
Type of interface	Pluggable interface module (IF), technical data as for 2nd interface
Plug-in interface modules	IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)
<b>Isochronous mode</b>	
Isochronous operation (application synchronized up to terminal)	Yes; For PROFIBUS only
<b>Communication functions</b>	
PG/OP communication	Yes
Data record routing	Yes
Global data communication	
• supported	Yes
S7 basic communication	
• supported	Yes
S7 communication	
• supported	Yes
S5-compatible communication	
• supported	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5
Standard communication (FMS)	
• supported	Yes; Via CP and loadable FB
Open IE communication	
• ISO-on-TCP (RFC1006)	Via CP 443-1 and loadable FB
Web server	
• supported	No
Number of connections	
• overall	64

6ES7 417-4XT05-0AB0 CPU 417-4	
<b>Configuration</b>	
programming	
• Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
- HiGraph®	Yes
Know-how protection	
• User program protection/password protection	Yes
<b>Dimensions</b>	
Width	50 mm
Height	290 mm
Depth	219 mm
Required slots	2
<b>Weight</b>	
Weight, approx.	0.9 kg

# SIMATIC S7-400

## Central processing units

### Standard CPUs

#### CPU 417

Ordering data	Order No.	Order No.	
<b>CPU 417-4</b> Main memory 30 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, module slots for up to 2 additional IF modules, slot for memory card, incl. slot number labels	<b>6ES7 417-4XT05-0AB0</b>	<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC	<b>6ES7 998-8XC01-8YE0</b>
<b>Memory card RAM</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 64 MB	<b>6ES7 952-0AF00-0AA0</b> <b>6ES7 952-1AH00-0AA0</b> <b>6ES7 952-1AK00-0AA0</b> <b>6ES7 952-1AL00-0AA0</b> <b>6ES7 952-1AM00-0AA0</b> <b>6ES7 952-1AP00-0AA0</b> <b>6ES7 952-1AS00-0AA0</b> <b>6ES7 952-1AY00-0AA0</b>	<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates	<b>6ES7 998-8XC01-8YE2</b>
<b>FEPRAM memory card</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 32 MB 64 MB	<b>6ES7 952-0KF00-0AA0</b> <b>6ES7 952-0KH00-0AA0</b> <b>6ES7 952-1KK00-0AA0</b> <b>6ES7 952-1KL00-0AA0</b> <b>6ES7 952-1KM00-0AA0</b> <b>6ES7 952-1KP00-0AA0</b> <b>6ES7 952-1KS00-0AA0</b> <b>6ES7 952-1KT00-0AA0</b> <b>6ES7 952-1KY00-0AA0</b>	<b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6ES7 972-0BA12-0XA0</b> <b>6ES7 972-0BB12-0XA0</b>
<b>MPI cable</b> for connection of SIMATIC S7 and PG via MPI; 5 m in length	<b>6ES7 901-0BF00-0AA0</b>	<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6ES7 972-0BA42-0XA0</b> <b>6ES7 972-0BB42-0XA0</b>
<b>IF 964-DP interface module</b> To connect an additional DP line; for CPU 414-3, CPU 414-3 PN/DP, CPU 416-3, CPU 416-3 PN/DP, CPU 417-4	<b>6ES7 964-2AA04-0AB0</b>	<b>RS 485 bus connector with 90° cable outlet for FastConnect connection system</b> Max. transfer rate 12 Mbit/s Without PG interface <ul style="list-style-type: none"> <li>• 1 unit</li> <li>• 100 units</li> </ul> With PG interface <ul style="list-style-type: none"> <li>• 1 unit</li> <li>• 100 units</li> </ul>	<b>6ES7 972-0BA52-0XA0</b> <b>6ES7 972-0BA52-0XB0</b> <b>6ES7 972-0BB52-0XA0</b> <b>6ES7 972-0BB52-0XB0</b>
<b>Slot number plates</b> 1 set (spare part)	<b>6ES7 912-0AA00-0AA0</b>	<b>RS 485 bus connector with axial cable outlet</b> For SIMATIC OP, for connection to PPI, MPI, PROFIBUS	<b>6GK1 500-0EA02</b>
		<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m	<b>6XV1 830-0EH10</b>

# SIMATIC S7-400

## Central processing units

SIPLUS Standard CPUs  
SIPLUS CPU 412

### Overview



- The low-cost introduction to the mid performance range
- Can be used in small and medium-sized plants with requirements in the mid performance range

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS CPU 412	
<b>Order No.</b>	<b>6AG1 412-2EK06-2AB0</b>
<b>Order No. based on</b>	<b>6ES7 412-2EK06-0AB0</b>
Range of ambient temperature	-25 ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies, except for the ambient conditions

#### Ambient conditions

Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For further technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

### Ordering data

### Order No.

<b>SIPLUS CPU 412-2 PN</b> (extended temperature range and medial exposure) Main memory 1 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, slot for memory card, incl. slot number labels	<b>6AG1 412-2EK06-2AB0</b>
<b>Memory Card RAM</b>	
2 MB	<b>6AG1 952-1AL00-4AA0</b>
4 MB	<b>6AG1 952-1AM00-7AA0</b>
8 MB	<b>6AG1 952-1AP00-7AA0</b>
16 MB	<b>6AG1 952-1AS00-7AA0</b>
64 MB	<b>6AG1 952-1AY00-7AA0</b>
<b>RS 485 bus connector with 90° cable outlet</b> (extended temperature range and medial exposure) Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6AG1 972-0BA12-2XA0</b> <b>6AG1 972-0BB12-2XA0</b>
<b>RS 485 bus connector with angled cable outlet</b> (extended temperature range and medial exposure) Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6AG1 972-0BA42-7XA0</b> <b>6AG1 972-0BB42-7XA0</b>
<b>RS 485 bus connector with axial cable outlet</b> For SIPLUS OP, for connection to PPI, MPI, PROFIBUS	<b>6AG1 500-0EA02-2AA0</b>
<b>Further accessories</b>	See SIMATIC CPU 412, page 6/7

# SIMATIC S7-400

## Central processing units

SIPLUS Standard CPUs  
SIPLUS CPU 414

### Overview



- CPUs for high demands in the mid-level performance range
- Applicable for plants with additional demands on programming scope and processing speed
- Integrated PROFINET functions in CPU 414-3 PN/DP

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS CPU 414	
<b>Order No.</b>	<b>6AG1 414-3EM06-7AB0</b>
<b>Order No. based on</b>	<b>6ES7 414-3EM06-0AB0</b>
Range of ambient temperature	-25 ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies, except for the ambient conditions
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For further technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

### Ordering data

### Order No.

<b>SIPLUS 414-3 PN/DP</b> (extended temperature range and medial exposure) Main memory 4 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, slot for memory card, module slot for 1 IF module, incl. slot number labels	<b>6AG1 414-3EM06-7AB0</b>
<b>Memory Card RAM</b> 2 MB 4 MB 8 MB 16 MB 64 MB	<b>6AG1 952-1AL00-4AA0</b> <b>6AG1 952-1AM00-7AA0</b> <b>6AG1 952-1AP00-7AA0</b> <b>6AG1 952-1AS00-7AA0</b> <b>6AG1 952-1AY00-7AA0</b>
<b>IF 964-DP interface module</b> For connecting an additional DP line; for SIPLUS CPU 414-3 PN/DP, CPU 416-3, CPU 416-3 PN/DP, CPU 417-4	<b>6AG1964-2AA04-7AB0</b>
<b>RS 485 bus connector with 90° cable outlet</b> (extended temperature range and medial exposure) max. transfer rate 12 Mbit/s without PG interface with PG interface	<b>6AG1 972-0BA12-2XA0</b> <b>6AG1 972-0BB12-2XA0</b>
<b>RS 485 bus connector with angled cable outlet</b> (extended temperature range and medial exposure) max. transfer rate 12 Mbit/s without PG interface with PG interface	<b>6AG1 972-0BA42-7XA0</b> <b>6AG1 972-0BB42-7XA0</b>
<b>RS 485 bus connector with axial cable outlet</b> (extended temperature range and medial exposure) For SIPLUS OP, for connection to PPI, MPI, PROFIBUS	<b>6AG1 500-0EA02-2AA0</b>
<b>RS 485 repeater for PROFIBUS</b> (extended temperature range and medial exposure) Transfer rate up to 12 Mbit/s; 24 V DC; IP20 enclosure	<b>6AG1 972-0AA02-7XA0</b>
<b>SCALANCE X204-2 Industrial Ethernet Switch</b> (medial exposure) Industrial Ethernet Switches with integral SNMP access, Web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two FO ports	<b>6AG1 204-2BB10-4AA3</b>
<b>IE FC RJ45 Plug 180</b> (extended temperature range and medial exposure) 180° cable outlet; 1 unit	<b>6AG1 901-1BB10-7AA0</b>
<b>Further accessories</b>	See SIMATIC CPU 414, page 6/11

# SIMATIC S7-400

## Central processing units

SIPLUS Standard CPUs  
SIPLUS CPU 416

### Overview



- High-performance CPUs in the high-end performance range
- Applicable for plants with high requirements in the high-end performance range
  - Integrated PROFINET functions in CPU 416-3 PN/DP

**Note:**

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS CPU 416-3		
Order number	6AG1 416-3XR05-4AB0	6AG1 416-3ES06-7AB0
Order No. based on	6ES7 416-3XR05-0AB0	6ES7 416-3ES06-0AB0
Range of ambient temperature	0 ... +60 °C	-25 ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components	
Technical data	The technical data of the standard product applies except for the ambient conditions	
Ambient conditions		
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.	
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!	
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!	
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!	
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K	

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

# SIMATIC S7-400

## Central processing units

SIPLUS Standard CPUs  
SIPLUS CPU 416

Ordering data	Order No.	Order No.
<b>SIPLUS CPU 416-3</b> (medial exposure) Power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, module slot for 1 IF module, slot for memory card, including mounting position labels 11.2 MB work memory	<b>6AG1 416-3XR05-4AB0</b>	
<b>SIPLUS CPU 416-3 PN/DP</b> (extended temperature range and medial exposure) Power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, module slot for 1 IF module, slot for memory card, including mounting position labels 11.2 MB work memory	<b>6AG1 416-3ES06-7AB0</b>	
<b>Memory Card RAM</b> (medial exposure) 2 MB (extended temperature range and medial exposure) 4 MB 8 MB 16 MB 64 MB	<b>6AG1 952-1AL00-4AA0</b>  <b>6AG1 952-1AM00-7AA0</b> <b>6AG1 952-1AP00-7AA0</b> <b>6AG1 952-1AS00-7AA0</b> <b>6AG1 952-1AY00-7AA0</b>	
<b>IF 964-DP interface module</b> (extended temperature range and medial exposure) For connecting an additional DP line; for SIPLUS CPU 414-3 PN/DP, CPU 416-3, CPU 416-3 PN/DP, CPU 417-4	<b>6AG1964-2AA04-7AB0</b>	
<b>RS 485 bus connector with 90° cable outlet</b> (extended temperature range and medial exposure) Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6AG1 972-0BA12-2XA0</b> <b>6AG1 972-0BB12-2XA0</b>	
		<b>RS 485 bus connector with angled cable outlet</b> (extended temperature range and medial exposure) Max. transfer rate 12 Mbit/s Without PG interface With PG interface
		<b>RS 485 bus connector with axial cable outlet</b> (extended temperature range and medial exposure) For SIPLUS OP, for connection to PPI, MPI, PROFIBUS
		<b>RS 485 repeater for PROFIBUS</b> Transfer rate up to 12 Mbit/s; 24 V DC; IP20 enclosure
		<b>SCALANCE X204-2 Industrial Ethernet Switch</b> Industrial Ethernet Switches with integral SNMP access, Web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two FO ports
		<b>IE FC RJ45 plug 180</b> (extended temperature range and medial exposure) 180° cable outlet; 1 unit
		<b>Further accessories</b> See SIMATIC CPU 416, page 6/16

6



# SIMATIC S7-400

## Central processing units

SIPLUS Standard CPUs  
SIPLUS CPU 417

### Overview



The most powerful SIMATIC S7-400 CPU

- Applicable for plants with maximum requirements in the high-end performance range
- With 2 plug-in slots for IF modules

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

SIPLUS CPU 417-4	
<b>Order number</b>	<b>6AG1 417-4XT05-4AB0</b>
<b>Order No. based on</b>	<b>6ES7 417-4XT05-0AB0</b>
Ambient temperature range	0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

### Ordering data

### Order No.

<b>SIPLUS CPU 417-4</b> (medial exposure) Power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, module slots for 2 additional IF modules, slot for memory card, including mounting position labels 30 MB work memory	<b>6AG1 417-4XT05-4AB0</b>
<b>Accessories</b> <b>Memory card RAM</b> (medial exposure) 2 MB (extended temperature range and medial exposure) 8 MB 16 MB 64 MB	<b>6AG1 952-1AL00-4AA0</b>  <b>6AG1 952-1AP00-7AA0</b> <b>6AG1 952-1AS00-7AA0</b> <b>6AG1 952-1AY00-7AA0</b>
<b>FEPRAM memory card</b> (medial exposure) 32 MB	<b>6AG1 952-1KT00-4AA0</b>
<b>RS 485 bus connector with 90° cable outlet</b> (extended temperature range and medial exposure) Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6AG1 972-0BA12-2XA0</b> <b>6AG1 972-0BB12-2XA0</b>
<b>RS 485 bus connector with angled cable outlet</b> (extended temperature range and medial exposure) Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6AG1 972-0BA42-7XA0</b> <b>6AG1 972-0BB42-7XA0</b>
<b>Further accessories</b>	See SIMATIC CPU 417, page 6/20

# SIMATIC S7-400

## Central processing units

### Fail-safe CPUs CPU 414F

#### Overview



- For constructing a fail-safe automation system for plants with increased safety requirements
- CPUs for high demands in the mid-level performance range
- Applicable for plants with additional demands on programming scope and processing speed
- Satisfies safety requirements up to SIL 3 acc. to IEC 61508 and Cat. 4 acc. to EN 954-1
- Standard and safety-related tasks can be performed with a single CPU
- Integrated PROFINET functions in CPU 414F-3 PN/DP
- Multi-processor mode is possible
- Safety-related communication with distributed I/O devices over PROFIBUS DP or PROFINET IO with PROFIsafe profile
- Fail-safe I/O modules can be connected in a distributed manner via the integrated interfaces (DP and PN with CPU 416F-3 PN/DP) and/or through communication modules (CP 443-5 Extended and CP 443-1 Adv.)
- Central and distributed use of standard modules for non-safety-oriented applications

6

#### Technical specifications

	6ES7 414-3FM06-0AB0 CPU 414F-3 PN/DP
<b>General information</b> Engineering with • Programming package	STEP7 V5.5 or higher/iMap V3.0 + iMap STEP7 Add-on V3.0 SP5 or higher
<b>Supply voltage</b> 24 V DC	No; Power supply via system power supply
<b>Power losses</b> Power loss, typ.	6.5 W
<b>Memory</b> Work memory • integrated • integrated (for program) • integrated (for data)	4 Mbyte 2 Mbyte 2 Mbyte
Load memory • expandable FEPRM, max. • integrated RAM, max. • expandable RAM, max.	64 Mbyte 512 kbyte 64 Mbyte
<b>CPU processing times</b> for bit operations, typ.	45 ns
for word operations, typ.	45 ns
for fixed point arithmetic, typ.	45 ns
for floating point arithmetic, typ.	135 ns

	6ES7 414-3FM06-0AB0 CPU 414F-3 PN/DP
<b>Counters, timers and their retentivity</b> S7 counter • Number	2 048
IEC counter • present	Yes
S7 times • Number	2 048
IEC timer • present	Yes
<b>Data areas and their retentivity</b> Flag • Number, max.	8 kbyte; Size of bit memory address area
<b>Address area</b> I/O address area • Inputs • Outputs	8 kbyte 8 kbyte
Process image • Inputs, adjustable • Outputs, adjustable	8 kbyte 8 kbyte
<b>Time of day</b> Clock • Hardware clock (real-time clock)	Yes
Operating hours counter • Number	16

**Technical specifications (continued)**

6ES7 414-3FM06-0AB0 CPU 414F-3 PN/DP	
<b>1st interface</b>	
Type of interface	integrated
Physics	RS 485 / PROFIBUS + MPI
Functionality	
• MPI	Yes
• DP master	Yes
• DP slave	Yes
DP master	
• Number of DP slaves, max.	32
<b>2nd interface</b>	
Type of interface	PROFINET
Physics	Ethernet RJ45
Number of ports	2
Functionality	
• DP master	No
• DP slave	No
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFINET CBA	Yes
PROFINET IO Controller	
• Max. number of connectable IO devices for RT	256
• Number of IO devices with IRT and the option "high flexibility"	256
• Number of IO Devices with IRT and the option "high performance", max.	64
<b>3rd interface</b>	
Type of interface	Pluggable interface module (IF)
Plug-in interface modules	IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)
Physics	RS 485 / PROFIBUS
Functionality	
• MPI	No
• DP master	Yes
• DP slave	Yes
DP master	
• Number of DP slaves, max.	96
<b>Isochronous mode</b>	
Isochronous operation (application synchronized up to terminal)	Yes; Via PROFIBUS DP or PROFINET interface

6ES7 414-3FM06-0AB0 CPU 414F-3 PN/DP	
<b>Communication functions</b>	
PG/OP communication	Yes
Data record routing	Yes
Global data communication	
• supported	Yes
S7 basic communication	
• supported	Yes
S7 communication	
• supported	Yes
S5-compatible communication	
• supported	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5
Standard communication (FMS)	
• supported	Yes; Via CP and loadable FB
Open IE communication	
• TCP/IP	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	62
• ISO-on-TCP (RFC1006)	Yes; Via integrated PROFINET interface or CP 443-1 Adv. and loadable FBs
- Number of connections, max.	62
• UDP	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	62
Web server	
• supported	Yes
Number of connections	
• overall	64
<b>Configuration</b>	
programming	
• Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
- HiGraph®	Yes
Know-how protection	
• User program protection/password protection	Yes
• Block encryption	Yes; With S7 block Privacy
<b>Dimensions</b>	
Width	50 mm
Height	290 mm
Depth	219 mm
Required slots	2
<b>Weight</b>	
Weight, approx.	900 g

# SIMATIC S7-400

## Central processing units

### Fail-safe CPUs CPU 414F

Ordering data	Order No.	Order No.
<b>CPU 414F-3 PN/DP</b> For setting up safety-related automation system; main memory 4 MB, power supply 24 V DC, MPI/PROFIBUS DP master interface, PROFINET interface, slot for memory card, module slot for 1 IF module, incl. slot number labels	<b>6ES7 414-3FM06-0AB0</b>	
<b>Distributed Safety V5.4 programming tool</b> Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, ET 200S Requirement: STEP 7 V5.3 SP3 and higher Floating license Floating license for 1 user, license key download without software or documentation <sup>1)</sup> ; email address required for delivery	<b>6ES7 833-1FC02-0YA5</b> <b>6ES7 833-1FC02-0YH5</b>	
<b>Distributed Safety Upgrade</b> From V5.x to V5.4; Floating license for 1 user	<b>6ES7 833-1FC02-0YE5</b>	
<b>STEP 7 Safety Advanced V11</b> Task: Engineering tool for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco Requirement: STEP 7 Professional V11 SP1 Floating license for 1 user Floating license for 1 user, license key download without software or documentation <sup>1)</sup> ; email address required for delivery	<b>6ES7 833-1FA11-0YA5</b> <b>6ES7 833-1FA11-0YH5</b>	
<b>STEP 7 Safety Advanced Upgrade</b> Distributed Safety V5.4 SP5 and STEP 7 Safety Advanced V11 for parallel use; incl. software on CD; Combo License for 1 user Distributed Safety V5.4 SP5 and STEP 7 Safety Advanced V11 for parallel use; includes software on CD; combo license for 1 user, license key download without software or documentation <sup>1)</sup> ; email address required for delivery	<b>6ES7 833-1FA11-0YE5</b> <b>6ES7 833-1FA11-0YK5</b>	
<b>Memory Card RAM</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 64 MB	<b>6ES7 952-0AF00-0AA0</b> <b>6ES7 952-1AH00-0AA0</b> <b>6ES7 952-1AK00-0AA0</b> <b>6ES7 952-1AL00-0AA0</b> <b>6ES7 952-1AM00-0AA0</b> <b>6ES7 952-1AP00-0AA0</b> <b>6ES7 952-1AS00-0AA0</b> <b>6ES7 952-1AY00-0AA0</b>	
		<b>FEPRM memory card</b> 64 KB 256 KB 1 MB 2 MB 4 MB 8 MB 16 MB 32 MB 64 MB
		<b>MPI cable</b> for connection of SIMATIC S7 and PG via MPI; 5 m in length
		<b>IF 964-DP interface module</b> For connecting an additional DP line
		<b>Slot number plates</b> 1 set (spare part)
		<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC
		<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates
		<b>PROFIBUS bus components</b>
		<b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface
		<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface
		<b>RS 485 bus connector with 90° cable outlet for FastConnect connection system</b> Max. transfer rate 12 Mbit/s Without PG interface • 1 unit • 100 units With PG interface • 1 unit • 100 units
		<b>RS 485 bus connector with axial cable outlet</b> For SIMATIC OP, for connection to PPI, MPI, PROFIBUS
		<b>6ES7952-0KF00-0AA0</b> <b>6ES7952-0KH00-0AA0</b> <b>6ES7 952-1KK00-0AA0</b> <b>6ES7 952-1KL00-0AA0</b> <b>6ES7 952-1KM00-0AA0</b> <b>6ES7 952-1KP00-0AA0</b> <b>6ES7 952-1KS00-0AA0</b> <b>6ES7 952-1KT00-0AA0</b> <b>6ES7 952-1KY00-0AA0</b> <b>6ES7 901-0BF00-0AA0</b> <b>6ES7 964-2AA04-0AB0</b> <b>6ES7 912-0AA00-0AA0</b> <b>6ES7 998-8XC01-8YE0</b> <b>6ES7 998-8XC01-8YE2</b> <b>6ES7 972-0BA12-0XA0</b> <b>6ES7 972-0BB12-0XA0</b> <b>6ES7 972-0BA42-0XA0</b> <b>6ES7 972-0BB42-0XA0</b> <b>6ES7 972-0BA52-0XA0</b> <b>6ES7 972-0BA52-0XB0</b> <b>6ES7 972-0BB52-0XA0</b> <b>6ES7 972-0BB52-0XB0</b> <b>6GK1 500-0EA02</b>

<sup>1)</sup> For up-to-date information and download availability, see: [www.siemens.com/tia-online-software-delivery](http://www.siemens.com/tia-online-software-delivery)

# SIMATIC S7-400

## Central processing units

Fail-safe CPUs  
CPU 414F

Ordering data	Order No.	Order No.
<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m	<b>6XV1 830-0EH10</b>	<b>6GK5 204-2BB10-2AA3</b>
<b>RS 485 repeater for PROFIBUS</b> Transmission rate up to 12 Mbit/s; 24 V DC; IP20 enclosure	<b>6ES7 972-0AA02-0XA0</b>	
<b>PROFINET bus components</b> <b>IE FC TP standard cable GP 2x2</b> 4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/IE FC RJ45 Plug; PROFINET-compatible; with UL approval; Sold by the meter	<b>6XV1 840-2AH10</b>	<b>SCALANCE X204-2 Industrial Ethernet Switch</b> Industrial Ethernet Switches with integral SNMP access, Web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two FO ports  <b>IE FC RJ45 plugs</b> RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables  <b>IE FC RJ45 plug 180</b> 180° cable outlet 1 unit 10 units 50 units
<b>FO Standard Cable GP (50/125)</b> Standard cable, splittable, UL approval, sold by the meter	<b>6XV1 873-2A</b>	
		<b>6GK1 901-1BB10-2AA0</b> <b>6GK1 901-1BB10-2AB0</b> <b>6GK1 901-1BB10-2AE0</b>
		<b>PROFIBUS/PROFINET bus components</b> For establishing MPI/PROFIBUS/PROFINET communication  See IK PI, CA 01 catalogs

# SIMATIC S7-400

## Central processing units

### Fail-safe CPUs CPU 416F

#### Overview



- For constructing a fail-safe automation system for plants with increased safety requirements
- High-performance CPU in the top-end performance range
- Satisfies safety requirements up to SIL 3 acc. to IEC 61508 and Cat. 4 acc. to EN 954-1
- Standard and safety-related tasks can be performed with a single CPU
- Multi-processor mode is possible
- Safety-related communication with distributed I/O devices over PROFIBUS DP with the *PROFIsafe* profile
- Fail-safe I/O modules can be connected decentralized over the integrated interfaces (DP and PN with CPU416F-3 PN/DP) and/or through communication modules (CP443-5 Ext. and CP443-1 Adv.)
- Standard modules for non-safety-related applications can be operated centrally and decentralized

#### Technical specifications

	6ES7 416-2FN05-0AB0 CPU 416F-2	6ES7 416-3FS06-0AB0 CPU416F-3 PN/DP
<b>General information</b>		
Engineering with • Programming package	STEP 7 V5.3 SP2 or higher with hardware update, Distributed Safety V5.2 SP2 or higher	STEP7 V5.5 or higher/iMap V3.0 + iMap STEP7 Add-on V3.0 SP5 or higher
<b>Supply voltage</b>		
24 V DC	No; Power supply via system power supply	No; Power supply via system power supply
<b>Power losses</b>		
Power loss, typ.	4.5 W	6.5 W
<b>Memory</b>		
Work memory • integrated • integrated (for program) • integrated (for data)	5.6 Mbyte 2.8 Mbyte 2.8 Mbyte	16 Mbyte 8 Mbyte 8 Mbyte
Load memory • expandable FEPRAM, max. • integrated RAM, max. • expandable RAM, max.	64 Mbyte 1 Mbyte 64 Mbyte	64 Mbyte 1 Mbyte 64 Mbyte
<b>CPU processing times</b>		
for bit operations, typ.	30 ns	30 ns
for word operations, typ.	30 ns	30 ns
for fixed point arithmetic, typ.	30 ns	30 ns
for floating point arithmetic, typ.	90 ns	90 ns
<b>Counters, timers and their retentivity</b>		
S7 counter • Number	2 048	2 048
IEC counter • present	Yes	Yes
S7 times • Number	2 048	2 048
IEC timer • present	Yes	Yes

**Technical specifications** (continued)

	<b>6ES7 416-2FN05-0AB0</b> <b>CPU 416F-2</b>	<b>6ES7 416-3FS06-0AB0</b> <b>CPU416F-3 PN/DP</b>
<b>Data areas and their retentivity</b>		
Flag		
• Number, max.	16 kbyte; Size of bit memory address area	16 kbyte; Size of bit memory address area
<b>Address area</b>		
I/O address area		
• Inputs	16 kbyte	16 kbyte
• Outputs	16 kbyte	16 kbyte
Process image		
• Inputs, adjustable	16 kbyte	16 kbyte
• Outputs, adjustable	16 kbyte	16 kbyte
<b>Time of day</b>		
Clock		
• Hardware clock (real-time clock)	Yes	Yes
Operating hours counter		
• Number	16	16
<b>1st interface</b>		
Type of interface	integrated	integrated
Physics	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI
Functionality		
• MPI	Yes	Yes
• DP master	Yes	Yes
• DP slave	Yes	Yes
DP master		
• Number of DP slaves, max.	32	32
<b>2nd interface</b>		
Type of interface	integrated	PROFINET
Physics	RS 485 / PROFIBUS	Ethernet RJ45
Number of ports		2
Functionality		
• DP master	Yes	No
• DP slave	Yes	No
• PROFINET IO Controller		Yes
• PROFINET IO Device		Yes
• PROFINET CBA		Yes
DP master		
• Number of DP slaves, max.	125	
PROFINET IO Controller		
• Max. number of connectable IO devices for RT		256
• Number of IO devices with IRT and the option "high flexibility"		256
• Number of IO Devices with IRT and the option "high performance", max.		64
<b>3rd interface</b>		
Type of interface		Pluggable interface module (IF)
Plug-in interface modules		IF 964-DP (MLFB: 6ES7964-2AA04-0AB0)
Physics		RS 485 / PROFIBUS
Functionality		
• MPI		No
• DP master		Yes
• DP slave		Yes
DP master		
• Number of DP slaves, max.		125

# SIMATIC S7-400

## Central processing units

### Fail-safe CPUs CPU 416F

#### Technical specifications (continued)

	6ES7 416-2FN05-0AB0 CPU 416F-2	6ES7 416-3FS06-0AB0 CPU416F-3 PN/DP
<b>Isochronous mode</b>		
Isochronous operation (application synchronized up to terminal)	Yes; For PROFIBUS only	Yes; Via PROFIBUS DP or PROFINET interface
<b>Communication functions</b>		
PG/OP communication	Yes	Yes
Data record routing	Yes	Yes
Global data communication		
• supported	Yes	Yes
S7 basic communication		
• supported	Yes	Yes
S7 communication		
• supported	Yes	Yes
S5-compatible communication		
• supported	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5	Yes; Via FC AG_SEND and AG_RECV, max. via 10 CP 443-1 or 443-5
Standard communication (FMS)		
• supported	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB
Open IE communication		
• TCP/IP		Yes; via integrated PROFINET interface and loadable FBs 94
- Number of connections, max.		Yes; Via integrated PROFINET interface or CP 443-1 and loadable FBs 94
• ISO-on-TCP (RFC1006)	Via CP 443-1 and loadable FB	Yes; via integrated PROFINET interface and loadable FBs 94
- Number of connections, max.		
• UDP		
- Number of connections, max.		
Web server		
• supported	No	Yes
Number of connections		
• overall	64	96
<b>Configuration programming</b>		
• Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	Yes	Yes
- GRAPH	Yes	Yes
- HiGraph®	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Block encryption		Yes; With S7 block Privacy
<b>Dimensions</b>		
Width	25 mm	50 mm
Height	290 mm	290 mm
Depth	219 mm	219 mm
Required slots	1	2
<b>Weight</b>		
Weight, approx.	0.7 kg	900 g



Ordering data	Order No.	Order No.
<b>CPU 416F-2</b> For configuring safety-related automation systems; 5.6 MB RAM, 24 V DC power supply, MPI/PROFIBUS DP master interface, PROFIBUS DP master interface, slot for memory card, incl. slot number labels	<b>6ES7 416-2FN05-0AB0</b>	
<b>CPU 416F-3 PN/DP</b> For configuring safety-related automation systems; main memory 16 MB, 24 V DC power supply, MPI/PROFIBUS DP master interface, PROFINET interface, PROFIBUS DP master interface, receptacle for 1 IF submodule, slot for memory card, incl. slot number labels	<b>6ES7 416-3FS06-0AB0</b>	
<b>S7 Distributed Safety V5.4 programming tool</b> <b>Task:</b> Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, ET 200S <b>Requirement:</b> STEP 7 V5.3 SP3 and higher Floating license	<b>6ES7 833-1FC02-0YA5</b> <b>6ES7 833-1FC02-0YH5</b>	
<b>S7 Distributed Safety upgrade</b> From V5.x to V5.4; Floating license for 1 user	<b>6ES7 833-1FC02-0YE5</b>	
<b>STEP 7 Safety Advanced V11</b> <b>Task:</b> Engineering tool for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco <b>Requirement:</b> STEP 7 Professional V11 SP1 Floating license for 1 user	<b>6ES7 833-1FA11-0YA5</b> <b>6ES7 833-1FA11-0YH5</b>	
<b>STEP 7 Safety Advanced Upgrade</b> Distributed Safety V5.4 SP5 and STEP 7 Safety Advanced V11 for parallel use; incl. software on CD; Combo License for 1 user  Distributed Safety V5.4 SP5 and STEP 7 Safety Advanced V11 for parallel use; includes software on CD; combo license for 1 user, license key download without software or documentation <sup>1)</sup> ; email address required for delivery	<b>6ES7 833-1FA11-0YE5</b>  <b>6ES7 833-1FA11-0YK5</b>	
		<b>Memory card RAM</b> 64 KB <b>6ES7 952-0AF00-0AA0</b> 256 KB <b>6ES7 952-1AH00-0AA0</b> 1 MB <b>6ES7 952-1AK00-0AA0</b> 2 MB <b>6ES7 952-1AL00-0AA0</b> 4 MB <b>6ES7 952-1AM00-0AA0</b> 8 MB <b>6ES7 952-1AP00-0AA0</b> 16 MB <b>6ES7 952-1AS00-0AA0</b> 64 MB <b>6ES7 952-1AY00-0AA0</b>
		<b>FEPR0M memory card</b> 64 KB <b>6ES7952-0KF00-0AA0</b> 256 KB <b>6ES7952-0KH00-0AA0</b> 1 MB <b>6ES7 952-1KK00-0AA0</b> 2 MB <b>6ES7 952-1KL00-0AA0</b> 4 MB <b>6ES7 952-1KM00-0AA0</b> 8 MB <b>6ES7 952-1KP00-0AA0</b> 16 MB <b>6ES7 952-1KS00-0AA0</b> 32 MB <b>6ES7 952-1KT00-0AA0</b> 64 MB <b>6ES7 952-1KY00-0AA0</b>
		<b>MPI cable</b> for connection of SIMATIC S7 and PG via MPI; 5 m in length <b>6ES7 901-0BF00-0AA0</b>
		<b>IF 964-DP interface module</b> For connecting an additional DP line <b>6ES7 964-2AA04-0AB0</b>
		<b>Slot number plates</b> 1 set (spare part) <b>6ES7 912-0AA00-0AA0</b>
		<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC <b>6ES7 998-8XC01-8YE0</b>
		<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates <b>6ES7 998-8XC01-8YE2</b>

<sup>1)</sup> For up-to-date information and download availability, see: [www.siemens.com/tia-online-software-delivery](http://www.siemens.com/tia-online-software-delivery)

# SIMATIC S7-400

## Central processing units

Fail-safe CPUs  
CPU 416F

Ordering data	Order No.	Order No.
<b>PROFIBUS bus components</b>		<b>PROFINET bus components</b>
<b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6ES7 972-0BA12-0XA0</b> <b>6ES7 972-0BB12-0XA0</b>	<b>IE FC TP standard cable GP 2x2</b> 4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/ IE FC RJ45 Plug; PROFINET-compatible; with UL approval; Sold by the meter
<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6ES7 972-0BA42-0XA0</b> <b>6ES7 972-0BB42-0XA0</b>	<b>FO Standard Cable GP (50/125)</b> Standard cable, splittable, UL approval, sold by the meter
<b>RS 485 bus connector with 90° cable outlet for FastConnect system</b> Max. transfer rate 12 Mbit/s Without PG interface • 1 unit • 100 units With PG interface • 1 unit • 100 units	<b>6ES7 972-0BA52-0XA0</b> <b>6ES7 972-0BA52-0XB0</b> <b>6ES7 972-0BB52-0XA0</b> <b>6ES7 972-0BB52-0XB0</b>	<b>SCALANCE X204-2 Industrial Ethernet Switch</b> Industrial Ethernet Switches with integral SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two FO ports
<b>RS 485 bus connector with axial cable outlet</b> For SIMATIC OP, for connection to PPI, MPI, PROFIBUS	<b>6GK1 500-0EA02</b>	<b>IE FC RJ45 plugs</b> RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables
<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m	<b>6XV1 830-0EH10</b>	<b>IE FC RJ45 plug 180</b> 180° cable outlet 1 unit 10 units 50 units
<b>RS 485 repeater for PROFIBUS</b> Transmission rate up to 12 Mbit/s; 24 V DC; IP20 enclosure	<b>6ES7 972-0AA02-0XA0</b>	<b>PROFIBUS/PROFINET bus components</b> For establishing MPI/PROFIBUS/PROFINET communication
		<b>6XV1 840-2AH10</b> <b>6XV1 873-2A</b> <b>6GK5 204-2BB10-2AA3</b> <b>6GK1 901-1BB10-2AA0</b> <b>6GK1 901-1BB10-2AB0</b> <b>6GK1 901-1BB10-2AE0</b> See IK PI, CA 01 catalogs

6

# SIMATIC S7-400

## Central processing units

High-availability CPUs  
CPU 412H, CPU 414H, CPU 416H, CPU 417H

### Overview CPU 412H



- CPU for SIMATIC S7-400H and S7-400F/FH
- Can be used in S7-400H high-availability systems
- Can be used with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- With integrated PROFIBUS DP master and combined MPI/PROFIBUS DP master interface
- With integrated PROFINET interface (2-port switch)
- Features 2 slots for sync modules

### Overview CPU 414H



- CPU for SIMATIC S7-400H and S7-400F/FH
- Can be used in S7-400H high-availability systems
- Can be used with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- With integrated PROFIBUS DP master and combined MPI/PROFIBUS DP master interface
- With integrated PROFINET interface (2-port switch)
- Features 2 slots for sync modules

### Overview CPU 416H

- CPU for SIMATIC S7-400H and S7-400F/FH
- Can be used in S7-400H high-availability systems
- Can be used with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- With integrated PROFIBUS DP master and combined MPI/PROFIBUS DP master interface
- With integrated PROFINET interface (2-port switch)
- Features 2 slots for sync modules

### Overview CPU 417H



- CPU for SIMATIC S7-400H and S7-400F/FH
- Can be used in S7-400H high-availability systems
- Can be used with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- With integrated PROFIBUS DP master interface and combined MPI/PROFIBUS DP master interface
- With integrated PROFINET interface (2-port switch)
- Features 2 slots for sync modules

# SIMATIC S7-400

## Central processing units

High-availability CPUs  
CPU 412H, CPU 414H, CPU 416H, CPU 417H

### Technical specifications

	6ES7 412-5HK06-0AB0 CPU 412-5H PN/DP	6ES7 414-5HM06-0AB0 CPU 414-5H PN/DP	6ES7 416-5HS06-0AB0 CPU 416-5H PN/DP	6ES7 417-5HT06-0AB0 CPU 417-5H PN/DP
<b>General information</b>				
Engineering with • Programming package	As of STEP 7 V5.5 SP2 with HF1	As of STEP 7 V5.5 SP2 with HF1	As of STEP 7 V5.5 SP2 with HF1	As of STEP 7 V5.5 SP2 with HF1
<b>Supply voltage</b>				
24 V DC	No; Power supply via system power supply	No; Power supply via system power supply	No; Power supply via system power supply	No; Power supply via system power supply
<b>Power losses</b>				
Power loss, typ.	7.5 W	7.5 W	7.5 W	7.5 W
<b>Memory</b>				
Work memory • integrated • integrated (for program) • integrated (for data)	1 Mbyte 512 kbyte 512 kbyte	4 Mbyte 2 Mbyte 2 Mbyte	16 Mbyte 6 Mbyte 10 Mbyte	32 Mbyte 16 Mbyte 16 Mbyte
Load memory • expandable FEPRM, max. • integrated RAM, max. • expandable RAM, max.	64 Mbyte 512 kbyte 64 Mbyte	64 Mbyte 512 kbyte 64 Mbyte	64 Mbyte 1 Mbyte 64 Mbyte	64 Mbyte 1 Mbyte 64 Mbyte
<b>CPU processing times</b>				
for bit operations, typ.	31.25 ns	18.75 ns	12.5 ns	7.5 ns
for word operations, typ.	31.25 ns	18.75 ns	12.5 ns	7.5 ns
for fixed point arithmetic, typ.	31.25 ns	18.75 ns	12.5 ns	7.5 ns
for floating point arithmetic, typ.	62.5 ns	37.5 ns	25 ns	15 ns
<b>Counters, timers and their retentivity</b>				
S7 counter • Number	2 048	2 048	2 048	2 048
IEC counter • present	Yes	Yes	Yes	Yes
S7 timer • Number	2 048	2 048	2 048	2 048
IEC timer • present	Yes	Yes	Yes	Yes
<b>Data areas and their retentivity</b>				
Flag • Number, max.	8 192 byte	8 192 byte	16 384 byte	16 384 byte
<b>Address area</b>				
I/O address area • Inputs • Outputs	8 kbyte 8 kbyte	8 kbyte 8 kbyte	16 kbyte 16 kbyte	16 kbyte 16 kbyte
Process image • Inputs, adjustable • Outputs, adjustable	8 kbyte 8 kbyte	8 kbyte 8 kbyte	16 kbyte 16 kbyte	16 kbyte 16 kbyte
<b>Time of day</b>				
Clock • Hardware clock (real-time clock)	Yes	Yes	Yes	Yes
Operating hours counter • Number	16	16	16	16

# SIMATIC S7-400

## Central processing units

High-availability CPUs  
CPU 412H, CPU 414H, CPU 416H, CPU 417H

### Technical specifications (continued)

	6ES7 412-5HK06-0AB0 CPU 412-5H PN/DP	6ES7 414-5HM06-0AB0 CPU 414-5H PN/DP	6ES7 416-5HS06-0AB0 CPU 416-5H PN/DP	6ES7 417-5HT06-0AB0 CPU 417-5H PN/DP
<b>1st interface</b>				
Type of interface	integrated	integrated	integrated	integrated
Physics	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI	RS 485 / PROFIBUS + MPI
Functionality				
• MPI	Yes	Yes	Yes	Yes
• DP master	Yes	Yes	Yes	Yes
• DP slave	No	No	No	No
DP master				
• Number of DP slaves, max.	32	32	32	32
<b>2nd interface</b>				
Type of interface	PROFINET	PROFINET	PROFINET	PROFINET
Physics	Ethernet RJ45	Ethernet RJ45	Ethernet RJ45	Ethernet RJ45
Number of ports	2	2	2	2
Functionality				
• DP master	No	No	No	No
• DP slave	No	No	No	No
• PROFINET IO Controller	Yes	Yes	Yes	Yes
• PROFINET IO Device	No	No	No	No
• PROFINET CBA	No	No	No	No
PROFINET IO Controller				
• Max. number of connectable IO devices for RT	256	256	256	256
<b>3rd interface</b>				
Type of interface	integrated	integrated	integrated	integrated
Physics	RS 485 / PROFIBUS	RS 485 / PROFIBUS	RS 485 / PROFIBUS	RS 485 / PROFIBUS
Functionality				
• DP master	Yes	Yes	Yes	Yes
• DP slave	No	No	No	No
DP master				
• Number of DP slaves, max.	64	96	125	125
<b>4th interface</b>				
Type of interface	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)
Plug-in interface modules	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0
<b>5th Interface</b>				
Type of interface	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)
Plug-in interface modules	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0	Synchronization modules 6ES7960-1AA06-0XA0 or 6ES7960-1AB06-0XA0
<b>Isochronous mode</b>				
Isochronous operation (application synchronized up to terminal)	No	No	No	No

# SIMATIC S7-400

## Central processing units

High-availability CPUs  
CPU 412H, CPU 414H, CPU 416H, CPU 417H

### Technical specifications (continued)

	6ES7 412-5HK06-0AB0 CPU 412-5H PN/DP	6ES7 414-5HM06-0AB0 CPU 414-5H PN/DP	6ES7 416-5HS06-0AB0 CPU 416-5H PN/DP	6ES7 417-5HT06-0AB0 CPU 417-5H PN/DP
<b>Communication functions</b>				
PG/OP communication	Yes	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes	Yes
S7 routing	Yes	Yes	Yes	Yes
Global data communication • supported	No	No	No	No
S7 basic communication • supported	No	No	No	No
S7 communication • supported	Yes	Yes	Yes	Yes
S5-compatible communication • supported	Yes; (via CP max. 10 and FC AG_SEND and FC AG_RECV)	Yes; (via CP max. 10 and FC AG_SEND and FC AG_RECV)	Yes; (via CP max. 10 and FC AG_SEND and FC AG_RECV)	Yes; (via CP max. 10 and FC AG_SEND and FC AG_RECV)
Standard communication (FMS) • supported	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB	Yes; Via CP and loadable FB
Open IE communication • TCP/IP	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	46	62	94	118
• ISO-on-TCP (RFC1006)	Yes; Via integrated PROFINET interface or CP 443-1 and loadable FBs	Yes; Via integrated PROFINET interface or CP 443-1 and loadable FBs	Yes; Via integrated PROFINET interface or CP 443-1 and loadable FBs	Yes; Via integrated PROFINET interface or CP 443-1 and loadable FBs
- Number of connections, max.	46	62	94	118
• UDP	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	46	62	94	118
Web server • supported	No	No	No	No
Number of connections • overall	48	64	96	120
<b>Configuration</b>				
programming				
• Programming language				
- LAD	Yes	Yes	Yes	Yes
- FBD	Yes	Yes	Yes	Yes
- STL	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes
- CFC	Yes	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes	Yes
Know-how protection				
• User program protection/password protection	Yes	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
<b>Dimensions</b>				
Width	50 mm	50 mm	50 mm	50 mm
Height	290 mm	290 mm	290 mm	290 mm
Depth	219 mm	219 mm	219 mm	219 mm
Required slots	2	2	2	2
<b>Weight</b>				
Weight, approx.	995 g	995 g	995 g	995 g

# SIMATIC S7-400

## Central processing units

High-availability CPUs  
CPU 412H, CPU 414H, CPU 416H, CPU 417H

Ordering data	Order No.	Order No.
<b>CPU 412-5H</b> For S7-400H and S7-400F/FH; 1 MB RAM, 1 combined MPI/ PROFIBUS DP master interface, 1 PROFIBUS DP interface, 2 PROFINET interfaces (switches), 2 slots for sync modules, slot for memory card, incl. slot number labels	<b>6ES7 412-5HK06-0AB0</b>	
<b>CPU 412-5H system bundle</b> Not assembled, consisting of: UR2-H rack, 2 x PS 405/407 power supply units, 2 x CPU 412-5H, 4 x Sync modules (for max. 10 m), 2 x fiber optic cables for sync mod- ules (1 m), 4 x backup batteries; additional two memory cards required (to be ordered separately)		
<b>412-5H system bundle, 120/230 V AC, 10 A</b>	<b>6ES7 400-0HR01-4AB0</b>	
<b>412-5H system bundle, 24/48/60 V DC, 10 A</b>	<b>6ES7 400-0HR51-4AB0</b>	
<b>CPU 414-5H</b> For S7-400H and S7-400F/FH; 4 MB RAM, 1 combined MPI/ PROFIBUS DP master interface, 1 PROFIBUS DP interface, 2 PROFINET interfaces (switches), 2 slots for sync modules, slot for memory card, incl. slot number labels	<b>6ES7 414-5HM06-0AB0</b>	
<b>CPU 414-5H system bundle</b> Not assembled, consisting of: UR2-H rack, 2 x PS 405/407 power supply units, 2 x CPU 414-5H, 4 x Sync modules (for max. 10 m), 2 x fiber optic cables for sync mod- ules (1 m), 4 x backup batteries; two additional memory cards required (to be ordered separately)		
<b>414-5H system bundle, 120/230 V AC, 10 A</b>	<b>6ES7 400-0HR02-4AB0</b>	
<b>414-5H system bundle, 24/48/60 V DC, 10 A</b>	<b>6ES7 400-0HR52-4AB0</b>	
<b>CPU 416-5H</b> For S7-400H and S7-400F/FH; 16 MB RAM, 1 combined MPI/ PROFIBUS DP master interface, 1 PROFIBUS DP interface, 2 PROFINET interfaces (switches), 2 slots for sync modules, slot for memory card, incl. slot number labels	<b>6ES7 416-5HS06-0AB0</b>	
		<b>CPU 416-5H system bundle</b> Not assembled, consisting of: UR2-H rack, 2 x PS 405/407 power supply units, 2 x CPU 416-5H, 4 x Sync modules (for max. 10 m), 2 x fiber optic cables for sync mod- ules (1 m), 4 x backup batteries; two additional memory cards required (to be ordered separately)
		<b>416-5H system bundle, 120/230 V AC, 10 A</b>
		<b>416-5H system bundle, 24/48/60 V DC, 10 A</b>
		<b>CPU 417-5H</b> For S7-400H and S7-400F/FH; 32 MB RAM, 1 combined MPI/PROFIBUS DP master inter- face, 1 PROFIBUS DP interface, 2 PROFINET interfaces (switches), 2 slots for sync modules, slot for memory card, incl. slot number labels
		<b>CPU 417-5H system bundle</b> Not assembled, consisting of: UR2-H rack, 2 x PS 405/407 power supply units, 2 x CPU 417-5H, 4 x Sync modules (for max. 10 m), 2 x fiber optic cables for sync mod- ules (1 m), 4 x backup batteries; two additional memory cards required (to be ordered separately)
		<b>417-5H system bundle, 120/230 V AC, 10 A</b>
		<b>417-5H system bundle, 24/48/60 V DC, 10 A</b>
		<b>Memory card RAM</b>
		1 MB <b>6ES7 952-1AK00-0AA0</b>
		2 MB <b>6ES7 952-1AL00-0AA0</b>
		4 MB <b>6ES7 952-1AM00-0AA0</b>
		8 MB <b>6ES7 952-1AP00-0AA0</b>
		16 MB <b>6ES7 952-1AS00-0AA0</b>
		64 MB <b>6ES7 952-1AY00-0AA0</b>
		<b>FEPROM memory card</b>
		1 MB <b>6ES7 952-1KK00-0AA0</b>
		2 MB <b>6ES7 952-1KL00-0AA0</b>
		4 MB <b>6ES7 952-1KM00-0AA0</b>
		8 MB <b>6ES7 952-1KP00-0AA0</b>
		16 MB <b>6ES7 952-1KS00-0AA0</b>
		32 MB <b>6ES7 952-1KT00-0AA0</b>
		64 MB <b>6ES7 952-1KY00-0AA0</b>

# SIMATIC S7-400

## Central processing units

High-availability CPUs  
CPU 412H, CPU 414H, CPU 416H, CPU 417H

Ordering data	Order No.	Order No.
<b>MPI cable</b> for connection of SIMATIC S7 and PG via MPI; 5 m in length	<b>6ES7 901-0BF00-0AA0</b>	
<b>Slot number plates</b> 1 set (spare part)	<b>6ES7 912-0AA00-0AA0</b>	
<b>S7 F Systems RT License</b> For processing safety-related user programs, for one S7 400H-based system each with CPU 412-5H, CPU 414-5H, CPU 416-5H or CPU 417-5H	<b>6ES7 833-1CC00-6YX0</b>	
<b>S7 F Systems V6.1</b> Programming and configuring environment for creating and operating safety-related STEP 7 programs for an S7 400H-based target system, floating license for 1 user, runs under Windows XP Prof SP2, Windows XP Prof SP2/SP3, Windows Server 2003 SP2 2 languages (English, German) Type of delivery: License certificate as well as software and electronic documentation on CD	<b>6ES7 833-1CC02-0YA5</b>	
<b>S7 F systems upgrade from V5.x/V6.0 to V6.1</b> 2 languages (English, German), floating license for 1 user Type of delivery: License certificate as well as software and electronic documentation on CD	<b>6ES7 833-1CC02-0YE5</b>	
<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC	<b>6ES7 998-8XC01-8YE0</b>	
		<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates
		<b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface
		<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface Max. transfer rate 1.5 Mbit/s Without PG interface
		<b>Bus connector RS 485 with 90° cable outlet for FastConnect connection technology</b> Max. transfer rate 12 Mbit/s Without PG interface <ul style="list-style-type: none"> <li>• 1 unit</li> <li>• 100 units</li> </ul> With PG interface <ul style="list-style-type: none"> <li>• 1 unit</li> <li>• 100 units</li> </ul>
		<b>RS 485 bus connector with axial cable outlet</b> For SIMATIC OP, for connection to PPI, MPI, PROFIBUS
		<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m



# SIMATIC S7-400

## Central processing units

### Sync-module for coupling the CPU 41xH

#### Overview



- For coupling the two CPU 41xH in the S7-400H subunits.
- Can be plugged direct into the CPU

#### Technical specifications

	6ES7 960-1AA06-0XA0	6ES7 960-1AB06-0XA0
<b>Input current</b> from CPU, max.	220 mA	240 mA
<b>Power losses</b> Power loss, typ.	0.77 W	0.83 W
<b>Dimensions</b>		
Width	13 mm	13 mm
Height	14 mm	14 mm
Depth	58 mm	58 mm
<b>Weight</b> Weight, approx.	14 g	14 g

#### Ordering data

##### Sync module

for coupling the CPU 41xH  
for S7-400H/F/FH;  
2 modules required per CPU;

for patch cable, can be used  
with fiber-optic cables up to 10 m

for patch and installation cables,  
can be used with fiber-optic cables  
up to 10 km

##### Order No.

**6ES7 960-1AA06-0XA0**

**6ES7 960-1AB06-0XA0**

##### Fiber-optic connecting cable

For Sync module  
6ES7 960-1Ax04-0XA0

- 1 m
- 2 m
- 10 m

For Sync module  
6ES7 960-1AB06-0XA0;  
fiber-optic monomode LC/LC duplex  
crossed 9/125 μ (max. 10 km)

##### Order No.

**6ES7 960-1AA04-5AA0**  
**6ES7 960-1AA04-5BA0**  
**6ES7 960-1AA04-5KA0**

On request

# SIMATIC S7-400

## Central processing units

### Y-link for S7-400H

#### Overview



- Transceiver for the transition from a redundant PROFIBUS DP master system to a single-channel PROFIBUS DP master system
- To connect devices with a single PROFIBUS DP interface to the redundant PROFIBUS DP master system of the SIMATIC S7-400H

#### Technical specifications

	6ES7 153-2BA02-0XB0
<b>General information</b>	
Vendor identification (VendorID)	801Eh
<b>Supply voltage</b>	
24 V DC	Yes
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
permissible range (ripple included), lower limit (DC)	20.4 V
permissible range (ripple included), upper limit (DC)	28.8 V
External protection for supply cables (recommendation)	2.5 A
Mains buffering	
• Mains/voltage failure stored energy time	5 ms
<b>Input current</b>	
Current consumption, max.	650 mA
Inrush current, typ.	3 A
$I^2t$	0.1 A <sup>2</sup> ·s
<b>Output voltage</b>	
Rated value, 5 V DC	Yes
<b>Output current</b>	
for backplane bus (5 V DC), max.	1.5 A
<b>Power losses</b>	
Power loss, typ.	5.5 W
<b>Address area</b>	
Addressing volume	
• Outputs	244 byte
• Inputs	244 byte
<b>Hardware configuration</b>	
Number of modules per DP slave interface, max.	12

	6ES7 153-2BA02-0XB0
<b>Time stamping</b>	
Accuracy	1 ms; 1ms at up to 8 modules; 10ms at up to 12 modules
Number of message buffers	15
Messages per message buffer	20
Number of stampable digital inputs, max.	128; Max. 128 signals/station; max. 32 signals/slot
Time format	RFC 1119
Time resolution	0.466 ns
Time interval for transmitting the message buffer if a message is present	1 000 ms
Time stamp on signal change	rising / falling edge as signal entering or exiting
<b>Interfaces</b>	
Interface physics, RS 485	Yes
Interface physics, FOC	No
<b>PROFIBUS DP</b>	
• Node addresses	1 to 125 permitted
• Automatic detection of transmission speed	Yes
• PROFIBUS DP, output current, max.	70 mA
• Transmission procedure	RS 485
• Transmission rate, max.	12 Mbit/s
• SYNC capability	Yes
• FREECE capability	Yes
• Direct data exchange (slave-to-slave communication)	Yes; Sender
• PROFIBUS DP	9-pin sub D
<b>1st interface</b>	
DP slave	
• GSD file	SI04801.GSG
• Automatic baud rate search	Yes
<b>Communication functions</b>	
Bus protocol/transmission protocol	PROFIBUS DP to EN 50170

### Technical specifications (continued)

6ES7 153-2BA02-0XB0	
<b>Isolation</b>	
Isolation checked with	Isolation voltage 500 V
<b>Degree and class of protection</b>	
IP20	Yes
<b>Ambient conditions</b>	
Operating temperature	
• Min.	0 °C
• max.	60 °C
Air pressure	
• Operating altitude above sea level, max.	3 000 m
<b>Dimensions</b>	
Width	40 mm
Height	125 mm
Depth	117 mm
<b>Weight</b>	
Weight, approx.	360 g

6ES7 197-1LB00-0XA0	
<b>General information</b>	
Requirements for DP master system	
• Length of parameter assignment message	244 byte
<b>Supply voltage</b>	
Description	via bus module
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
<b>Interfaces</b>	
PROFIBUS DP	
• Properties of the lower-level DP master systems	
- Transmission rate, max.	12 Mbit/s; 45.45 kbit/s to 12 Mbit/s
- Termination of lower-level DP master system	Active terminating resistor (Bus Terminator)
- Use of OLM/OBT	Yes
- Use of RS 485 repeaters, max.	9
- Number of DP slaves, max.	31; 64 when using RS 485 repeaters or OLM/OBT
<b>Protocols</b>	
PROFIBUS DP	Yes
<b>Interrupts/diagnostics/status information</b>	
Status indicator	No
Alarms	
• Alarms	No
Diagnostic messages	
• Diagnostic functions	Yes
<b>Galvanic isolation</b>	
to lower-level DP master system	Yes
<b>Dimensions</b>	
Width	40 mm
Height	125 mm
Depth	130 mm
<b>Weight</b>	
Weight, approx.	200 g

# SIMATIC S7-400

## Central processing units

### Y-link for S7-400H

#### Ordering data

#### Order No.

For use with STEP 7 from V5.4 or PCS 7 from V7.0:

#### Y link

For connecting single-channel DP slaves to SIMATIC S7-400H; consisting of  
 2 IM 153 interface modules (6ES7 153-2BA02-0XB0),  
 1 Y coupler (6ES7 197-1LB00-0XA0),  
 1 BM IM/IM bus module (6ES7 195-7HD80-0XA0),  
 1 BM Y coupler bus module (6ES7 654-7HY00-0XA0)

**6ES7 197-1LA04-0XA0**

For use with PCS 7 V6.0 or higher:

#### Y link

For connecting single-channel DP slaves to SIMATIC S7-400H; consisting of  
 2 IM 153 interface modules (6ES7 153-2BA82-0XB0),  
 1 Y coupler (6ES7 197-1LB00-0XA0),  
 1 BM IM/IM bus module (6ES7 195-7HD80-0XA0),  
 1 BM Y coupler bus module (6ES7 654-7HY00-0XA0)

**6ES7 197-1LA11-0XA0**

#### Accessories

#### Mounting rail

For assembling the Y link with active bus modules

- Length 483 mm
- Length 530 mm

#### Order No.

**6ES7 195-1GA00-0XA0**  
**6ES7 195-1GF30-0XA0**

# SIMATIC S7-400

## Central processing units

SIPLUS high-availability CPUs  
SIPLUS CPU 412H

### Overview



- CPU for SIMATIC S7-400H and S7-400F/FH
- Usable in high-availability systems such as the S7-400H
- Usable with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- Features a combined MPI/PROFIBUS DP master interface
- Features 2 slots for sync modules

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

### Technical specifications

The technical data correspond to those of the based-on modules apart from the values listed in the table:

	<b>6AG1 412-3HJ14-4AB0</b>	<b>6AG1 412-2EK06-2AB0</b>	<b>6AG1 412-5HK06-7AB0</b>
<b>Based on</b>	<b>6ES7 412-3HJ14-0AB0</b>	<b>6ES7 412-2EK06-0AB0</b>	<b>6ES7412-5HK06-0AB0</b>
<b>Ambient conditions</b>			
Extended ambient conditions			
<ul style="list-style-type: none"> <li>• Relative to ambient temperature-atmospheric pressure-installation altitude</li> </ul>	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m). For "F-Systems" applications max. +2000 m above sea level permissible
<ul style="list-style-type: none"> <li>• Relative humidity <ul style="list-style-type: none"> <li>- with condensation</li> </ul> </li> </ul>	100 %; Relative humidity, incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; Relative humidity, incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<ul style="list-style-type: none"> <li>• Resistance <ul style="list-style-type: none"> <li>- to biologically active substances</li> </ul> </li> </ul>	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation in corrosive atmospheres!	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!
<ul style="list-style-type: none"> <li>- to chemically active substances</li> </ul>	Yes; Class 3C4 incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!
<ul style="list-style-type: none"> <li>- to mechanically active substances</li> </ul>	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!
<b>Mechanical and climatic conditions during operation</b>			
Climatic conditions in operation			
<ul style="list-style-type: none"> <li>• Temperature <ul style="list-style-type: none"> <li>- Min.</li> <li>- max.</li> </ul> </li> </ul>	0 °C; = Tmin 60 °C; = Tmax	-25 °C; = Tmin 60 °C; = Tmax	-25 °C 70 °C; For "F-Systems" applications max. +60 °C permissible

# SIMATIC S7-400

## Central processing units

SIPLUS high-availability CPUs  
SIPLUS CPU 412H

### Ordering data

### Order No.

#### SIPLUS CPU 412-3H

**6AG1 412-3HJ14-4AB0**

(medial exposure)

for S7-400H and S7-400F/FH;  
768 KB work memory, combined  
MPI/PROFIBUS DP master interface,  
2 slots for sync modules, slot for  
memory card, including the  
mounting position labels

#### SIPLUS S7-400 CPU 412-2 PN

**6AG1 412-2EK06-2AB0**

(extended temperature range and  
medial exposure)

For S7-400H and S7-400F/FH;  
1 MB main memory  
(512 KB for code, 512 KB for data).  
2 interfaces:  
MPI/DP 12 Mbit/s (X1)  
Ethernet/PROFINET (X5)

#### SIPLUS S7-400 CPU 412-5H

**6AG1 412-5HK06-7AB0**

(extended temperature range and  
medial exposure)

For S7-400H and S7-400F/FH;  
1 MB main memory  
(512 KB for code, 512 KB for data).  
5 interfaces:  
1 x MPI/DP  
1 x DP  
1 x PN  
2 x for sync modules

### Order No.

#### Accessories

#### Memory card RAM

(medial exposure)

2 MB

**6AG1 952-1AL00-4AA0**

4 MB

**6AG1 952-1AM00-7AA0**

8 MB

**6AG1 952-1AP00-7AA0**

16 MB

**6AG1 952-1AS00-7AA0**

64 MB

**6AG1 952-1AY00-7AA0**

#### FEPRAM memory card

(medial exposure)

32 MB

**6AG1 952-1KT00-4AA0**

#### RS 485 bus connector

#### with 90° cable outlet

(extended temperature range and  
medial exposure)

Max. transfer rate 12 Mbit/s

Without PG interface

**6AG1 972-0BA12-2XA0**

With PG interface

**6AG1 972-0BB12-2XA0**

#### RS 485 bus connector

#### with angled cable outlet

(extended temperature range  
-40°C ... +70°C and  
medial exposure)

Max. transfer rate 12 Mbit/s

Without PG interface

**6AG1 972-0BA42-7XA0**

With PG interface

**6AG1 972-0BB42-7XA0**

#### Further accessories

See SIMATIC CPU 412,  
page 6/39

# SIMATIC S7-400

## Central processing units

SIPLUS high-availability CPUs  
SIPLUS CPU 414H

### Overview



CPU for SIMATIC S7-400H and S7-400F/FH

- Usable in high-availability systems such as the S7-400H
- Usable with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- With integral PROFIBUS DP master interface
- Features 2 slots for sync modules

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

### Technical specifications

The technical data correspond to those of the based-on modules apart from the values listed in the table:

	6AG1 414-4HM14-4AB0	6AG1 414-3EM06-7AB0	6AG1 414-5HM06-7AB0
Based on	6ES7 414-4HM14-0AB0	6ES7 414-3EM06-0AB0	6ES7 414-5HM06-0AB0
<b>Ambient conditions</b>			
Extended ambient conditions			
• Relative to ambient temperature -atmospheric pressure-installation altitude	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m). For "F-Systems" applications max. +2000 m above sea level permissible
• Relative humidity - with condensation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; Relative humidity, incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
• Resistance - to biologically active substances	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation in corrosive atmospheres!	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!
- to chemically active substances	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!
- to mechanically active substances	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!
<b>Mechanical and climatic conditions during operation</b>			
Climatic conditions in operation			
• Temperature - Min. - max.	0 °C; = Tmin 60 °C; = Tmax	-25 °C; = Tmin 70 °C; = Tmax	-25 °C 70 °C; For "F-Systems" applications max. +60 °C permissible

# SIMATIC S7-400

## Central processing units

SIPLUS high-availability CPUs  
SIPLUS CPU 414H

### Ordering data

### Order No.

### Order No.

#### SIPLUS CPU 414-4H

**6AG1 414-4HM14-4AB0**

(medial exposure)

For S7-400H and S7-400F/FH;  
2.8 MB main memory, MPI/  
PROFIBUS DP master interface,  
2 slots for sync modules, slot for  
memory card, incl. slot number  
labels

#### SIPLUS S7-400 CPU 414-3 PN/DP

**6AG1 414-3EM06-7AB0**

(extended temperature range and  
medial exposure)

4 MB main memory  
(2 MB for code, 2 MB for data)

3 interfaces:  
MPI/DP 12 Mbit/s (X1),  
Ethernet/PROFINET (X5),  
IF 964-DP pluggable (IF1)

#### SIPLUS S7-400 CPU 414-5H

**6AG1 414-5MH06-7AB0**

(extended temperature range and  
medial exposure)

For S7-400H and S7-400F/FH;  
1 MB main memory  
(512 KB for code, 512 KB for data)

5 interfaces:  
1 x MPI/DP  
1 x DP  
1 x PN  
2 x for sync modules

### Accessories

#### Memory Card RAM

(medial exposure)

2 MB

(extended temperature range and  
medial exposure)

4 MB

8 MB

16 MB

64 MB

#### FEPRM memory card

(medial exposure)

32 MB

#### RS 485 bus connector with 90° cable outlet

(extended temperature range and  
medial exposure)

Max. transfer rate 12 Mbit/s

Without PG interface

With PG interface

#### RS 485 bus connector with angled cable outlet

(extended temperature range and  
medial exposure)

Max. transfer rate 12 Mbit/s

Without PG interface

With PG interface

### Further accessories

**6AG1 952-1AL00-4AA0**

**6AG1 952-1AM00-7AA0**

**6AG1 952-1AP00-7AA0**

**6AG1 952-1AS00-7AA0**

**6AG1 952-1AY00-7AA0**

**6AG1 952-1KT00-4AA0**

**6AG1 972-0BA12-2XA0**

**6AG1 972-0BB12-2XA0**

**6AG1 972-0BA42-7XA0**

**6AG1 972-0BB42-7XA0**

See SIMATIC CPU 414-4H,  
page 6/39



# SIMATIC S7-400

## Central processing units

SIPLUS high-availability CPUs  
SIPLUS CPU 417H

### Overview



CPU for SIMATIC S7-400H and S7-400F/FH

- Usable in high-availability systems such as the S7-400H
- Usable with F runtime license as F-capable CPU in S7-400F/FH safety-related systems
- With integral PROFIBUS DP master interface
- Features 2 slots for sync modules

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

### Technical specifications

	6AG1 417-4HT14-4AB0 6ES7 417-4HT14-0AB0	6AG1 417-4XT05-4AB0 6ES7 417-4XT05-0AB0	6AG1 417-5HT06-7AB0 6ES7 417-5HT06-0AB0
<b>Based on</b>			
<b>Ambient conditions</b>			
Extended ambient conditions			
• Relative to ambient temperature-atmospheric pressure-installation altitude	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m). For "F-Systems" applications max. +2000 m above sea level permissible
• Relative humidity - with condensation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
• Resistance - to biologically active substances	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!
- to chemically active substances	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!
- to mechanically active substances	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!
<b>Mechanical and climatic conditions during operation</b>			
Climatic conditions in operation			
• Temperature - Min. - max.	0 °C; = Tmin 60 °C; = Tmax	0 °C; = Tmin 60 °C; = Tmax	-25 °C 70 °C; For "F-Systems" applications max. +60 °C permissible

# SIMATIC S7-400

## Central processing units

SIPLUS high-availability CPUs  
SIPLUS CPU 417H

### Ordering data

### Order No.

#### SIPLUS CPU 417H

(medial exposure)

For S7-400H and S7-400F/FH;  
30 MB work memory, MPI/  
PROFIBUS DP master interface,  
2 slots for sync modules, slot for  
memory card, incl. slot number  
plates

**6AG1 417-4HT14-4AB0**

#### SIPLUS S7-400 CPU417-4

(medial exposure)

For S7-400H and S7-400F/FH.  
Based on 6ES7 417-4XT05-0AB0

**6AG1 417-4XT05-4AB0**

#### SIPLUS S7-400 CPU 417-5H

(extended temperature range and  
medial exposure)

For S7-400H and S7-400F/FH;  
1 MB main memory  
(512 KB for code, 512 KB for data)

5 interfaces:

- 1 x MPI/DP
- 1 x DP
- 1 x PN
- 2 x for sync modules

**6AG1 417-5HT06-7AB0**

### Order No.

#### Accessories

#### Memory card RAM

(medial exposure)

2 MB

(extended temperature range and  
medial exposure)

4 MB

8 MB

16 MB

64 MB

**6AG1 952-1AL00-4AA0**

**6AG1 952-1AM00-7AA0**

**6AG1 952-1AP00-7AA0**

**6AG1 952-1AS00-7AA0**

**6AG1 952-1AY00-7AA0**

#### FEPR0M memory card

(medial exposure)

32 MB

**6AG1 952-1KT00-4AA0**

#### RS 485 bus connector with 90° cable outlet

(extended temperature range and  
medial exposure)

Max. transmission rate 12 Mbit/s

Without PG interface

**6AG1 972-0BA12-2XA0**

With PG interface

**6AG1 972-0BB12-2XA0**

#### RS 485 bus connector with angled cable outlet

(extended temperature range and  
medial exposure)

Max. transfer rate 12 Mbit/s

Without PG interface

**6AG1 972-0BA42-7XA0**

With PG interface

**6AG1 972-0BB42-7XA0**

#### Further accessories

See SIMATIC CPU 417-4H,  
page 6/39

# SIMATIC S7-400

## Central processing units

SIPLUS sync module  
for connecting the CPU 41xH

### Overview



- For linking the two CPUs 414-4H/417-4H in the subunits of the S7-400H
- Can be plugged directly into the CPU

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

### Technical specifications

	6ES7 960-1AA04-4XA0	6ES7 960-1AB04-4XA0	6ES7 960-1AA06-7XA0	6ES7 960-1AB06-7XA0
Based on	6ES7 960-1AA04-0XA0	6ES7 960-1AB04-0XA0	6ES7 960-1AA06-0XA0	6ES7 960-1AB06-0XA0
<b>Current consumption from CPU, max.</b>	210 mA	250 mA	220 mA	240 mA
<b>Power dissipation, typ.</b>	1.1 mW	1.3 mW	0.77 mW	0.83 mW
<b>Extended range of environmental conditions</b>				
• Temperatures	0 °C ... 60 °C	0 °C ... 60 °C	-25 °C ... +70 °C	-25 °C ... +70 °C
• Temperatures with reference to ambient temperature, air pressure and altitude	0 °C ... +60 °C at 1080 hPa ... 795 hPa (-1000 m ... +2000 m)	0 °C ... +60 °C at 1080 hPa ... 795 hPa (-1000 m ... +2000 m)	-25 °C ... +70 °C at 1080 hPa ... 795 hPa (-1000 m ... +2000 m)	-25 °C ... +70 °C at 1080 hPa ... 795 hPa (-1000 m ... +2000 m)
	0 °C ... +50 °C at 795 hPa ... 658 hPa (+2000 m ... +3500 m)	0 °C ... +50 °C at 795 hPa ... 658 hPa (+2000 m ... +3500 m)	-25 °C ... +60 °C at 795 hPa ... 658 hPa (+2000 m ... +3500 m)	-25 °C ... +60 °C at 795 hPa ... 658 hPa (+2000 m ... +3500 m)
	0 °C ... +40 °C at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	0 °C ... +40 °C at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	-25 °C ... +50 °C at 658 hPa ... 540 hPa (+3500 m ... +5000 m)	-25 °C ... +50 °C at 658 hPa ... 540 hPa (+3500 m ... +5000 m)
<b>Relative humidity (with condensation / maximum)</b>	100 %, incl. condensation/frost (no commissioning in bedewed state)	100 %, incl. condensation/frost (no commissioning in bedewed state)	100 %, incl. condensation/frost (no commissioning in bedewed state)	100 %, incl. condensation/frost (no commissioning in bedewed state)
<b>Resistance</b>				
• to biologically active substances / compliance with EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation.
• to chemically active substances / compliance with EN 60721-3-3	Yes; Class 3C4 (relative humidity < 75 %) incl. salt spray in accordance with EN 60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3C4 (relative humidity < 75 %) incl. salt spray in accordance with EN 60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3C4 (relative humidity < 75 %) incl. salt spray in accordance with EN 60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3C4 (relative humidity < 75 %) incl. salt spray in accordance with EN 60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation.
• to mechanically active substances, compliance with EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
<b>Dimensions</b>				
• Width	25 mm	25 mm	13 mm	13 mm
• Height	53 mm	53 mm	14 mm	14 mm
• Depth	140 mm	140 mm	58 mm	58 mm
<b>Cable length, max.</b>	10 m	10 km	10 m	10 km
<b>Weight, approx.</b>	65 g	65 g	14 g	14 g

# SIMATIC S7-400

## Central processing units

### SIPLUS sync module for connecting the CPU 41xH

Ordering data	Order No.	Accessories	Order No.
<b>SIPLUS sync module</b> (medial exposure) for coupling the CPU 41xH for S7-400H/F/FH; 2 modules required per CPU; <ul style="list-style-type: none"> <li>for patch cable, can be used with fiber-optic cables up to 10 m</li> <li>for patch and installation cables, can be used with fiber-optic cables up to 10 km</li> </ul>	<b>6AG1 960-1AA04-4XA0</b>  <b>6AG1 960-1AB04-4XA0</b>	<b>SIPLUS S7-400 OPTICAL FIBER CABLE 1M HF-S</b>  1 m 2 m 10 m	see SIMATIC sync module, page 6/41  <b>6AG1 960-1AA04-7AA0</b> <b>6AG1 960-1AA04-7BA0</b> <b>6AG1960-1AA04-7KA0</b>
<b>SIPLUS sync module</b> (extended temperature range -25 °C ... +70 °C and medial exposure) <ul style="list-style-type: none"> <li>for patch cable, can be used with fiber-optic cables up to 10 m</li> <li>for patch and installation cables, can be used with fiber-optic cables up to 10 km</li> </ul>	<b>6AG1 960-1AA06-7XA0</b>  <b>6AG1 960-1AB06-7XA0</b>		

# SIMATIC S7-400

## Central processing units

**SIPLUS Y-Link for S7-400H**

### Overview



- Bus coupler for transition from a redundant PROFIBUS DP master system to a single-channel PROFIBUS DP master system
- For connection of devices with only one PROFIBUS DP interface to the redundant PROFIBUS DP master system of the SIMATIC S7-400H

**Note:**

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

	<b>SIPLUS Y-Link for S7-400H</b>	<b>SIPLUS S7 BUS MODULE BM Y coupler</b>
<b>Order No.</b>	<b>6AG1 197-1LA11-4XA0</b>	<b>6AG1 654-7HY00-7XA0</b>
<b>Order No. based on</b>	<b>6ES7 197-1LA11-0XA0</b>	<b>6ES7 654-7HY00-0XA0</b>
Ambient temperature range	0 °C ... +60 °C	-25 °C ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components	
Technical data	The technical data of the standard product applies except for the ambient conditions.	

**Ambient conditions**

Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

<b>Ordering data</b>	<b>Order No.</b>	<b>Order No.</b>
For use with STEP 7 from V5.4 or PCS 7 from V7.0:		
<b>SIPLUS Y-Link for S7-400H</b> (medial exposure)	<b>6AG1 197-1LA11-4XA0</b>	
for connecting single-channel DP slaves to SIMATIC S7-400H; consisting of 2 IM 153 interface modules, 1 Y-coupler, 1 BM IM/IM bus module, 1 BM Y-coupler bus module		
	<b>Accessories</b>	
	<b>SIPLUS S7 BUS MODULE BM Y-coupler</b> (extended temperature range and medial exposure)	<b>6AG1 654-7HY00-7XA0</b>
	<b>Additional accessories</b>	See SIMATIC Y-Link, page 6/44

# SIMATIC S7-400

## Central processing units

### Interface modules

#### PROFIBUS IF-964 DP module

#### Overview



- To connect distributed I/Os over PROFIBUS DP
- Max. transmission rate 12 Mbit/s
- Electrically isolated RS 485 interface
- Connection via 9-pin sub-D connector
- The following connection options are available for each S7-400 CPU:
  - A PROFIBUS module in the CPUs 414-3, 414(F)-3 PN/DP, 416-3, 416(F)-3 PN/DP
  - Two PROFIBUS modules in the CPU 417-4

#### Note:

Can only be used with CPUs 6ES7 414-3XM05-0AB0, 6ES7 414-3EM05-0AB0, 6ES7 414-3EM06-0AB0, 6ES7 414-3FM06-0AB0, 6ES7 416-3XR05-0AB0, 6ES7 416-3ER05-0AB0, 6ES7 416-3ES06-0AB0, 6ES7 416-3FS06-0AB0 and 6ES7 417-4XT05-0AB0.

#### Technical specifications

6ES7 964-2AA04-0AB0	
<b>Input current</b> from CPU, max.	150 mA; Current consumption from S7-400 bus: The module uses no current at 24 V, it provides this voltage only at the DP interface. Total current consumption of the components connected to the DP interface, but maximum 150 mA. Current carrying capacity of the isolated 5 V (P5ext) maximum 90 mA, current carrying capacity of the 24 V maximum 150 mA.
<b>Power losses</b> Power loss, typ.	1 W
<b>Interfaces</b> PROFIBUS DP • Cable length, max.	1 200 m; At 9.6 kbit/s: max. 1200 m; at 12 Mbit/s: max. 100 m
<b>1st interface</b> Physics	RS 485
Isolated	Yes
Functionality • DP master • DP slave	Yes; Default setting Yes
DP master • Transmission rate, max. • Transmission rate, min. • Number of DP slaves, max. • Services - PG/OP communication - Equidistance mode support - SYNC/FREEZE - Direct data exchange (slave-to-slave communication)	12 Mbit/s 9.6 kbit/s 125; depending on the CPU used Yes Yes Yes Yes
• Address area - Inputs, max. - Outputs, max.	device-dependent device-dependent
• User data per DP slave - Inputs, max. - Outputs, max.	244 byte 244 byte
<b>Communication functions</b> Number of connections • overall	device-dependent
<b>Dimensions</b> Width	26 mm
Height	54 mm
Depth	130 mm
<b>Weight</b> Weight, approx.	65 g

#### Ordering data

#### Order No.

**IF-964 DP interface module**  
Interface module with integral PROFIBUS DP master interface

**6ES7 964-2AA04-0AB0**

# SIMATIC S7-400

## Central processing units

### SIPLUS PROFIBUS IF-964 DP module

#### Overview



- To connect distributed I/O via PROFIBUS DP
- Max. transmission rate 12 Mbit/s
- Electrically isolated RS-485 interface
- Connection via 9-pin Sub-D socket
- Depending on the S7-400 CPU, one or two pluggable PROFIBUS modules:
  - CPU 414-3/416-3: 1 module
  - CPU 417-4: 2 modules

#### Notes:

Can only be used with the CPUs 6AG1 416-3XR05-4AB0, 6AG1 416-3ER05-4AB0 and 6AG1 417-4XT05-4AB0.

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS PROFIBUS IF-964 DP module	
<b>Order No.</b>	<b>6AG1 964-2AA04-7AB0</b>
<b>Order No. based on</b>	<b>6ES7 964-2AA04-0AB0</b>
Ambient temperature range	-25 ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions.
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For further technical documentation on SIPLUS, see: [www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.
<b>SIPLUS IF-964 DP interface module</b>	<b>6AG1 964-2AA04-7AB0</b>
(extended temperature range and medial exposure)	
Interface module with integrated PROFIBUS DP master interface	

# SIMATIC S7-400

## Digital modules

### SM 421 digital input module

#### Overview



- Digital inputs for the SIMATIC S7-400
- For connecting standard switches and two-wire proximity switches (BERO)

#### Technical specifications

	6ES7 421-7BH01-0AB0	6ES7 421-1BL01-0AA0	6ES7 421-1EL00-0AA0	6ES7 421-1FH20-0AA0	6ES7 421-7DH00-0AB0
<b>Supply voltage</b>					
Load voltage L+					
• Rated value (DC)	24 V				
• permissible range, lower limit (DC)	20.4 V				
• permissible range, upper limit (DC)	28.8 V				
<b>Input current</b>					
from backplane bus 5 V DC, max.	130 mA	20 mA	200 mA	80 mA	150 mA
from supply voltage L+, max.	120 mA				
<b>Power losses</b>					
Power loss, max.	5 W	6 W	16 W	12 W	8 W; 3.5 W (24 V DC); 6.5 W (48 V DC); 8.0 W (60 V DC)
<b>Digital inputs</b>					
Number/binary inputs	16	32	32	16	16
Number of simultaneously controllable inputs					
• all mounting positions					
- up to 40 °C, max.	16	32	32	16	16
- up to 60 °C, max.	16	32	32	16	16
Input voltage					
• Type of input voltage					
• Rated value, DC	DC 24 V	DC 24 V	AC/DC 120 V	AC/DC 230 V; 120/230 V UC	AC/DC 24 V; 24 to 60 V UC
• Rated value, UC				0 to 40 V AC/ -40 to +40 V DC	-6 to +6 V DC/ 0 to 5 V AC
• for signal "0"	-30 to +5 V DC	-30 to +5 V DC	0 to 20 V UC	74 to 264 V AC; 80 to 264 V DC, -80 to -264 V	15 to 72 V DC; -15 to -72 V DC; 15 to 60 V AC
• for signal "1"	11 to 30 V DC	13 to 30 V DC	79 to 132 V AC; 80 to 132 V DC		
• Frequency range					
			47 to 63 Hz	47 to 63 Hz	47 to 63 Hz AC / DC



#### Technical specifications (continued)

	6ES7 421-7BH01-0AB0	6ES7 421-1BL01-0AA0	6ES7 421-1EL00-0AA0	6ES7 421-1FH20-0AA0	6ES7 421-7DH00-0AB0
<b>Input current</b> <ul style="list-style-type: none"> <li>for signal "0", max. (permissible quiescent current)</li> <li>for signal "1", typ.</li> </ul>	6 mA; 6 to 8 mA	1.3 mA 7 mA	1 mA 2 mA; 2 to 5 mA	6 mA; AC: 6 mA; DC: 2 mA 10 mA; at 120 V: 10 mA AC, 1.8 mA DC; at 230 V: 14 mA AC, 2 mA DC	4 mA; 4 to 10 mA
<b>Input delay</b> (for rated value of input voltage) <ul style="list-style-type: none"> <li>for standard inputs               <ul style="list-style-type: none"> <li>Parameterizable</li> <li>Rated value</li> </ul> </li> </ul>	Yes				Yes 0.5 ms; 0.5 / 3 / 10 / 20 ms
<b>Cable length</b> <ul style="list-style-type: none"> <li>Cable length, shielded, max.</li> <li>Cable length unshielded, max.</li> </ul>	1 000 m; 1000 m/3 ms; 70 m/0.5 ms; 30 m/0.1 ms; 30 m/0.05 ms 600 m; 600 m: 3 ms; 50 m: 0.5 ms; 20 m: 0.1 ms; 20 m: 0.05 ms	1 000 m 600 m	1 000 m 600 m	1 000 m 600 m	1 000 m 600 m; 600 m: 3, 10, 20 ms; 100 m: 0.5 ms
<b>Encoder</b> Connectable encoders <ul style="list-style-type: none"> <li>2-wire sensor               <ul style="list-style-type: none"> <li>Permissible quiescent current (2-wire sensor), max.</li> </ul> </li> </ul>	Yes 3 mA	Yes 1.5 mA	Yes 1 mA	Yes 5 mA; AC: 5 mA	Yes 0.5 mA; 0.5 to 2 mA
<b>Interrupts/diagnostics/status information</b> <b>Alarms</b> <ul style="list-style-type: none"> <li>Diagnostic alarm</li> <li>Hardware interrupt</li> </ul>	Yes; Parameterizable Yes; Parameterizable				Yes; Parameterizable Yes; Parameterizable
<b>Diagnostic messages</b> <ul style="list-style-type: none"> <li>Diagnostics</li> </ul>	Yes; internal/external fault				Yes; internal/external fault
<b>Galvanic isolation</b> Galvanic isolation digital inputs <ul style="list-style-type: none"> <li>between the channels, in groups of</li> <li>between the channels and the backplane bus</li> </ul>	8 Yes	32 Yes	8 Yes	4 Yes	1 Yes
<b>Isolation</b> Isolation checked with	500 V DC	500 V DC	1500 V AC	1500 V AC	1500 V AC
<b>Dimensions</b> Width	25 mm	25 mm	25 mm	25 mm	25 mm
Height	290 mm	290 mm	290 mm	290 mm	290 mm
Depth	210 mm	210 mm	210 mm	210 mm	210 mm
<b>Weight</b> Weight, approx.	600 g	500 g	600 g	650 g	600 g

# SIMATIC S7-400

## Digital modules

### SM 421 digital input module

#### Ordering data

##### SM 421 digital input modules

16 inputs, 24 V DC, with process/diagnostics interrupt

**6ES7 421-7BH01-0AB0**

32 inputs, 24 V DC

**6ES7 421-1BL01-0AA0**

32 inputs, 120 V AC/DC

**6ES7 421-1EL00-0AA0**

16 inputs, 120/230 V AC/DC, inputs according to IEC 1131-2 Type 2

**6ES7 421-1FH20-0AA0**

16 inputs, 24 to 60 V AC/DC, with process/diagnostics interrupt

**6ES7 421-7DH00-0AB0**

##### Front connector

48-pin

- with screw contacts, 1 unit
- with screw contacts, 84 units
- with spring-loaded terminals, 1 unit
- with crimp contacts, 1 unit
- with crimp contacts, 84 units

**6ES7 492-1AL00-0AA0**

**6ES7 492-1AL00-1AB0**

**6ES7 492-1BL00-0AA0**

**6ES7 492-1CL00-0AA0**

**6ES7 492-1CL00-1AB0**

##### SIMATIC TOP connect

See page 6/129; for information about which components can be used for the respective module, see Industry Mall

#### Order No.

##### Cover film for labeling strips

**6ES7 492-2XX00-0AA0**

Spare part

##### Labeling sheets for machine inscription

DIN A4, for printing using laser printer; pack of 10

petrol

**6ES7 492-2AX00-0AA0**

light-beige

**6ES7 492-2BX00-0AA0**

yellow

**6ES7 492-2CX00-0AA0**

red

**6ES7 492-2DX00-0AA0**

##### SIMATIC Manual Collection

**6ES7 998-8XC01-8YE0**

Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC

##### SIMATIC Manual Collection update service for 1 year

**6ES7 998-8XC01-8YE2**

Current "Manual Collection" DVD and the three subsequent updates

#### Overview



- Digital outputs for the SIMATIC S7-400
- For connecting solenoid valves, contactors, low-power motors, lamps and motor starters

#### Technical specifications

	6ES7 422-1FH00-0AA0	6ES7 422-1HH00-0AA0	6ES7 422-1BH11-0AA0	6ES7 422-1BL00-0AA0	6ES7 422-7BL00-0AB0
<b>Supply voltage</b>					
Load voltage L+					
• Rated value (DC)		60 V	24 V	24 V	24 V
• permissible range, lower limit (DC)		1 V	20.4 V	20.4 V	20.4 V
• permissible range, upper limit (DC)		60 V	28.8 V	28.8 V	28.8 V
Load voltage L1					
• Rated value (AC)	230 V; 120/230 V AC	230 V			
• permissible range, lower limit (AC)	79 V	2 V			20.4 V
• permissible range, upper limit (AC)	264 V	264 V			28.8 V
<b>Input current</b>					
from load voltage L+ (without load), max.	1.5 mA		30 mA	30 mA	120 mA
from load voltage L1 (without load), max.	6 mA				
from backplane bus 5 V DC, max.	400 mA	1 A	160 mA	200 mA	200 mA
<b>Power losses</b>					
Power loss, max.	16 W	25 W	7 W	4 W	8 W
<b>Digital outputs</b>					
Number/binary outputs	16	16; Relay	16	32	32
Limitation of inductive shutdown voltage to			-30 V	-27 V	L+ (-45 V)
Lamp load, max.	50 W	60 W	10 W	5 W	5 W
<b>Output voltage</b>					
• for signal "1", min.	L1 (-18.1 V)		L+ (-0.5 V)	L+ (-0.3 V)	L+ (-0.8 V)
<b>Output current</b>					
• for signal "1" rated value	2 A	5 A	2 A	0.5 A	0.5 A
• for signal "1" permissible range for 0 to 60 °C, min.	10 mA		5 mA	5 mA	5 mA
• for signal "1" permissible range for 0 to 60 °C, max.			2.4 A	0.6 A	0.6 A
• for signal "0" residual current, max.	2.6 mA		0.5 mA	0.3 mA	0.5 mA

# SIMATIC S7-400

## Digital modules

### SM 422 digital output module

#### Technical specifications (continued)

	6ES7 422-1FH00-0AA0	6ES7 422-1HH00-0AA0	6ES7 422-1BH11-0AA0	6ES7 422-1BL00-0AA0	6ES7 422-7BL00-0AB0
Switching frequency					
• with resistive load, max.	10 Hz	10 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz		0.1 Hz	0.5 Hz	2 Hz
Aggregate current of outputs (per group)					
• all mounting positions					
- up to 60 °C, max.	2 A; 5 A with fan subassembly; per 4 adjacent outputs	5 mA; 10 A with fan subassembly	2 A; 2 adjacent outputs each	2 A; 8 adjacent outputs each	2 A
Relay outputs					
• Number of operating cycles, max.		100 000; 100,000 (AC 15 / DC 13); 3,000,000 mechanical			
• Switching capacity of contacts					
- with inductive load, max.		5 A; 5 A (30 V DC); 5 A (230 V AC)			
- Switching frequency/contacts/at ohmic load/maximum		5 A; 5 A (30 V DC); 5 A (230 V AC); 1.2 A (60 V DC); 0.2 A (125 V DC)			
Cable length					
• Cable length, shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m
• Cable length unshielded, max.	600 m	600 m	600 m	600 m	600 m
<b>Interrupts/diagnostics/status information</b>					
Alarms					
• Diagnostic alarm					Yes; Parameterizable
Diagnostic messages					
• Diagnostics					Yes; internal/external fault
<b>Galvanic isolation</b>					
Galvanic isolation digital outputs					
• between the channels, in groups of	4	2	8	32	8
• between the channels and the backplane bus	Yes	Yes	Yes	Yes	Yes
<b>Isolation</b>					
Isolation checked with	1500 V AC	1500 V AC	500 V DC	500 V DC	500 V DC
<b>Dimensions</b>					
Width	25 mm	25 mm	25 mm	25 mm	25 mm
Height	290 mm	290 mm	290 mm	290 mm	290 mm
Depth	210 mm	210 mm	210 mm	210 mm	210 mm
<b>Weight</b>					
Weight, approx.	800 g	700 g	600 g	600 g	600 g

Ordering data	Order No.		Order No.
<b>SM 422 digital output modules</b>		<b>Labeling sheets for machine inscription</b>	
16 outputs, 24 V DC; 2 A	<b>6ES7 422-1BH11-0AA0</b>	DIN A4, for printing using laser printer; pack of 10	
32 outputs, 24 V DC; 0.5 A	<b>6ES7 422-1BL00-0AA0</b>	petrol	<b>6ES7 492-2AX00-0AA0</b>
32 outputs, 24 V DC, 0.5 A; with diagnostics	<b>6ES7 422-7BL00-0AB0</b>	light-beige	<b>6ES7 492-2BX00-0AA0</b>
16 outputs, 120/230 V AC; 2 A	<b>6ES7 422-1FH00-0AA0</b>	yellow	<b>6ES7 492-2CX00-0AA0</b>
16 outputs, relay contacts	<b>6ES7 422-1HH00-0AA0</b>	red	<b>6ES7 492-2DX00-0AA0</b>
<b>Front connector</b>		<b>SIMATIC Manual Collection</b>	<b>6ES7 998-8XC01-8YE0</b>
48-pin		Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC	
• with screw contacts, 1 unit	<b>6ES7 492-1AL00-0AA0</b>		
• with screw contacts, 84 units	<b>6ES7 492-1AL00-1AB0</b>		
• with spring-loaded terminals, 1 unit	<b>6ES7 492-1BL00-0AA0</b>		
• with crimp contacts, 1 unit	<b>6ES7 492-1CL00-0AA0</b>		
• with crimp contacts, 84 units	<b>6ES7 492-1CL00-1AB0</b>		
<b>SIMATIC TOP connect</b>	See page 6/129	<b>SIMATIC Manual Collection update service for 1 year</b>	<b>6ES7 998-8XC01-8YE2</b>
<b>Cover film for labeling strips</b>	<b>6ES7 492-2XX00-0AA0</b>	Current "Manual Collection" DVD and the three subsequent updates	
Spare part			

# SIMATIC S7-400

## SIPLUS digital modules

### SIPLUS SM 421 digital input module

#### Overview



- Digital inputs for SIMATIC S7-400
- For connection of switches and 2-wire proximity switches (BEROs)

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS SM 421 digital input module

<b>Order number</b>	<b>6AG1 421-1BL01-2AA0</b>
<b>Order No. based on</b>	<b>6ES7 421-1BL01-0AA0</b>
Ambient temperature range	-25 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.
<b>SIPLUS SM 421 digital input modules</b> (extended temperature range and medial exposure) 32 inputs, 24 V DC	<b>6AG1 421-1BL01-2AA0</b>
<b>Accessories</b>	

# SIMATIC S7-400

## SIPLUS digital modules

### SIPLUS SM 422 digital output module

#### Overview



- Digital outputs for SIMATIC S7-400
- For connecting solenoid valves, contactors, small-power motors, lamps and motor starters

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS SM 422 digital input module

<b>Order number</b>	<b>6AG1 422-1BL00-2AA0</b>
<b>Order No. based on</b>	<b>6ES7 422-1BL00-0AA0</b>
Ambient temperature range	-25 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.
<b>SIPLUS SM 422 digital output modules</b> (extended temperature range and medial exposure) 32 outputs, 24 V DC	<b>6AG1 422-1BL00-2AA0</b>
<b>Accessories</b>	

# SIMATIC S7-400

## Analog modules

### SM 431 analog input module

#### Overview



- Analog inputs for the SIMATIC S7-400
- For connection of voltage and current sensors, thermocouples, resistors and resistance thermometers
- Resolution from 13 to 16 bit

#### Technical specifications

	6ES7 431-0HH00-0AB0	6ES7 431-1KF20-0AB0	6ES7 431-1KF00-0AB0	6ES7 431-1KF10-0AB0
<b>Supply voltage</b>				
Load voltage L+				
• Rated value (DC)	24 V; Only required for supplying 2-wire transmitters	24 V; Only required for supplying 2-wire transmitters	not necessary	24 V; Only required for supplying 2-wire transmitters
• Reverse polarity protection	Yes	Yes		Yes
<b>Input current</b>				
from load voltage L+ (without load), max.	400 mA; for 16 connected, fully controlled 2-wire transmitters	200 mA; for 8 connected, fully controlled 2-wire transmitters		200 mA
from backplane bus 5 V DC, max.	100 mA	1 000 mA	350 mA	600 mA
<b>Power losses</b>				
Power loss, typ.	2 W	4.9 W	1.8 W	3.5 W
<b>Analog inputs</b>				
Number of analog inputs	16	8	8	8
Number of analog inputs for voltage/current measurement	16	8	8	8
Number of analog inputs for resistance measurement		4	4	4
permissible input voltage for voltage input (destruction limit), max.	20 V; 20 V DC permanent, 75 V DC for max. 1 s (duty factor 1:20)	18 V; 18 V continuous, 75 V for 1 ms (mark to space ratio 1:20)	50 V	18 V; 18 V continuous, 75 V for 1 ms (mark to space ratio 1:20)
permissible input current for current input (destruction limit), max.	40 mA	40 mA; Permanent	50 mA; 40 mA continuous	40 mA; Permanent
Input ranges (rated values), voltages				
• 1 to 5 V	Yes	Yes	Yes	Yes
• -1 V to +1 V	Yes	Yes	Yes	Yes
• -10 V to +10 V	Yes	Yes	Yes	Yes
• -2.5 V to +2.5 V				Yes
• -250 mV to +250 mV				Yes
• -5 V to +5 V				Yes
• -500 mV to +500 mV				Yes
• -80 mV to +80 mV				Yes



#### Technical specifications (continued)

	6ES7 431-0HH00-0AB0	6ES7 431-1KF20-0AB0	6ES7 431-1KF00-0AB0	6ES7 431-1KF10-0AB0
Input ranges (rated values), currents <ul style="list-style-type: none"> <li>• 0 to 20 mA</li> <li>• -20 to +20 mA</li> <li>• 4 to 20 mA</li> </ul>	Yes Yes	Yes Yes	Yes Yes	Yes Yes
Input ranges (rated values), thermoelements <ul style="list-style-type: none"> <li>• Type B</li> <li>• Type E</li> <li>• Type J</li> <li>• Type K</li> <li>• Type L</li> <li>• Type N</li> <li>• Type R</li> <li>• Type S</li> <li>• Type T</li> <li>• Type U</li> </ul>				Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
Input ranges (rated values), resistance thermometers <ul style="list-style-type: none"> <li>• Ni 100</li> <li>• Ni 1000</li> <li>• Pt 100</li> <li>• Pt 1000</li> <li>• Pt 10000</li> <li>• Pt 200</li> <li>• Pt 500</li> </ul>				Yes Yes Yes Yes Yes Yes Yes
Input ranges (rated values), resistors <ul style="list-style-type: none"> <li>• 0 to 150 ohms</li> <li>• 0 to 300 ohms</li> <li>• 0 to 48 ohms</li> <li>• 0 to 600 ohms</li> <li>• 0 to 6000 ohms</li> </ul>		Yes	Yes	Yes Yes Yes Yes Yes; Usable up to 5000 Ohm
Thermocouple (TC) <ul style="list-style-type: none"> <li>• for thermocouples</li> <li>• Temperature compensation <ul style="list-style-type: none"> <li>- internal temperature compensation</li> <li>- external temperature compensation with compensations socket</li> <li>- external temperature compensation with Pt100</li> <li>- dynamic reference temperature value</li> </ul> </li> </ul>				Type B, E, J, K, L, N, R, S, T, U  No Yes  Yes  Yes
Resistance thermometer (RTD) <ul style="list-style-type: none"> <li>• Characteristic linearization <ul style="list-style-type: none"> <li>- for resistance thermometer</li> </ul> </li> </ul>				Pt100, Pt200, Pt500, Pt1000, Ni100, Ni1000
Characteristic linearization <ul style="list-style-type: none"> <li>• Parameterizable</li> </ul>				Yes
Cable length <ul style="list-style-type: none"> <li>• Cable length, shielded, max.</li> </ul>	200 m	200 m	200 m	200 m; 50 m with thermocouples and input ranges <= 80 mV

# SIMATIC S7-400

## Analog modules

### SM 431 analog input module

#### Technical specifications (continued)

	6ES7 431-0HH00-0AB0	6ES7 431-1KF20-0AB0	6ES7 431-1KF00-0AB0	6ES7 431-1KF10-0AB0
<b>Analog value creation</b>				
Integrations and conversion time/ resolution per channel				
• Resolution with overrange (bit including sign), max.	13 bit	14 bit; 14 / 14 / 14	13 bit	14 bit; with activated filtering: 16 bits
• Integration time, parameterizable	Yes	Yes	Yes	Yes
• Basic conversion time, ms	55 / 65 ms	52 µs	23 / 25 ms	20.1 / 23.5 ms
• Integration time, ms	50 / 60 ms		16.7 / 20 ms	16.7 / 20 ms
• Basic conversion time, including integration time, ms				
- additional conversion time for wire break monitoring				4.3 ms
- additional conversion time for resistance measurement				40.2 / 47 ms
- additional conversion time for wire break monitoring and resistance measurement				5.5 ms
• Interference voltage suppression for interference frequency f1 in Hz	60 / 50 Hz	none / 400 / 60 / 50 Hz	60 / 50 Hz	60 / 50 Hz
<b>Encoder</b>				
Connection of signal encoders				
• for current measurement as 2-wire transducer		Yes	Yes; with external transmitter supply	Yes
• for current measurement as 4-wire transducer	Yes	Yes	Yes	Yes
• for resistance measurement with 2-conductor connection		Yes; Line resistances are also measured	Yes; Line resistances are also measured	Yes; Line resistances are also measured
• for resistance measurement with 3-conductor connection		Yes; Line resistances are also measured	Yes; Line resistances are also measured	Yes
• for resistance measurement with 4-conductor connection		Yes	Yes	Yes
<b>Errors/accuracies</b>				
Operational limit in overall temperature range				
• Voltage, relative to input area	+/- 0,65 %; 1.0% at 1 to 5 V; 0.65% at +/-1 V, +/-10 V	+/- 0,7 %; +/-0.7% at +/-1 V; +/-0.9% at +/-10 V, 1 to 5 V	+/- 1 %; +/-1.0% at +/-1 V; +/-0.6% at +/-10 V; +/-0.7% at 1 to 5 V	+/- 0,38 %; +/-0.38% at +/-80 mV; +/-0.35% at +/-250 mV, +/-500mV, +/-1 V, +/-2.5 V, +/-5 V, 1 to 5 V, +/-10 V
• Current, relative to input area	+/- 0,65 %	+/- 0,8 %; at +/-20 mA, 4 to 20 mA	+/- 1 %; at +/-20 mA, 4 to 20 mA	+/- 0,35 %; +/-20 mA, 0 to 20 mA, 4 to 20 mA
• Impedance, relative to input area		+/- 1 %	+/- 1,25 %; 0 to 500 ohms (4-conductor measurement, in range of 600 ohms)	+/- 0,5 %
• Resistance-type thermometer, relative to input area				+/- 0,5 %

#### Technical specifications (continued)

	6ES7 431-0HH00-0AB0	6ES7 431-1KF20-0AB0	6ES7 431-1KF00-0AB0	6ES7 431-1KF10-0AB0
<b>Basic error limit</b> (operational limit at 25 °C) <ul style="list-style-type: none"> <li>• Voltage, relative to input area</li> <li>• Current, relative to input area</li> <li>• Impedance, relative to input area</li> <li>• Resistance-type thermometer, relative to input area</li> </ul>	+/- 0,25 %; 0.5% at 1 to 5 V; 0.25% at +/-1 V, +/-10 V	+/- 0,6 %; 0.6% at +/-1 V; 0.75% at +/-10 V, 1 to 5 V	+/- 0,7 %; 0.7% at +/-1 V; 0.4% at +/-10 V; 0.5% at 1 to 5 V	+/- 0,15 %; +/-0.15%(+/-250 mV, +/-500 mV, +/-1 V, +/-2.5 V, +/-5 V, 1 to 5 V, +/- 10 V); +/-0.17% (+/- 80 mV); +/- 0,15 %; +/-20 mA, 0 to 20 mA, 4 to 20 mA +/- 0,15 %; +/-0.15% at 0 to 48 ohms (4-conductor mea- surement), 0 to 150 ohms (4-conductor measure- ment), 0 to 300 ohms (4-conductor measure- ment), 0 to 600 ohms (4-conductor measure- ment), 0 to 5000 ohms (4-conductor measurement, in range of 6000 ohms); +/-0.3% at 0 to 300 ohms (3-conductor measure- ment), 0 to 600 ohms (3-conductor measure- ment), 0 to 5000 ohms (3-conductor measurement, in range of 6000 ohms) +/- 0,3 %
<b>Galvanic isolation</b> Galvanic isolation analog inputs <ul style="list-style-type: none"> <li>• Galvanic isolation analog inputs</li> <li>• between the channels</li> </ul>	No No	Yes; internal/external No	Yes; internal/external No	Yes; internal/external No
<b>Permissible potential difference</b> between the inputs (UCM)	2 V DC / 2 Vpp AC	8 V AC	30 V AC	120 V AC
<b>Isolation</b> Isolation checked with	500 V DC between bus and local ground	2120 V DC between bus and analog part; 500 V DC between bus and local ground; 707 V DC between analog part and L+/M; 2120 V DC between analog part and local ground; 2120 V DC between L+/M and local ground	2120 V DC between bus and analog part; 500 V DC between bus and local ground; 2120 V DC between analog part and local ground	2120 V DC between bus and L+/M; 2120 V DC between bus and analog part; 500 V DC between bus and local ground; 707 V DC between analog part and L+/M; 2120 V DC between analog part and local ground; 2120 V DC between L+/M and local ground
<b>Dimensions</b> Width	25 mm	25 mm	25 mm	25 mm
Height	290 mm	290 mm	290 mm	290 mm
Depth	210 mm	210 mm	210 mm	210 mm
Required slots	1	1	1	1
<b>Weight</b> Weight, approx.	500 g	500 g	500 g	500 g

# SIMATIC S7-400

## Analog modules

### SM 431 analog input module

#### Technical specifications (continued)

	6ES7 431-7QH00-0AB0	6ES7 431-7KF00-0AB0	6ES7 431-7KF10-0AB0
<b>Supply voltage</b>			
Load voltage L+			
• Rated value (DC)	24 V; Only required for supplying 2-wire transmitters		
• Reverse polarity protection	Yes		
<b>Input current</b>			
from load voltage L+ (without load), max.	400 mA	400 mA	400 mA
from backplane bus 5 V DC, max.	700 mA	1 200 mA	650 mA
<b>Power losses</b>			
Power loss, typ.	4.5 W	4.6 W	3.3 W
<b>Analog inputs</b>			
Number of analog inputs	16	8	8
Number of analog inputs for voltage/current measurement	16	8	
Number of analog inputs for resistance measurement	8		8
permissible input voltage for voltage input (destruction limit), max.	18 V; 18 V continuous, 75 V for 1 ms (mark to space ratio 1:20)	35 V; 35 V continuous, 75 V for max. 1 s (mark to space ratio 1:20)	35 V; 35 V continuous, 75 V for max. 1 s (mark to space ratio 1:20)
permissible input current for current input (destruction limit), max.	40 mA	32 mA	
Input ranges (rated values), voltages			
• 1 to 5 V	Yes	Yes	
• -1 V to +1 V	Yes	Yes	
• -10 V to +10 V	Yes	Yes	
• -100 mV to +100 mV		Yes	
• -2.5 V to +2.5 V	Yes	Yes	
• -20 mV to +20 mV		Yes	
• -25 mV to +25 mV	Yes		
• -250 mV to +250 mV	Yes	Yes	
• -5 V to +5 V	Yes	Yes	
• -50 mV to +50 mV	Yes	Yes	
• -500 mV to +500 mV	Yes	Yes	
• -80 mV to +80 mV	Yes	Yes	
Input ranges (rated values), currents			
• 0 to 20 mA	Yes	Yes	
• -10 to +10 mA	Yes	Yes	
• -20 to +20 mA	Yes	Yes	
• -3.2 to +3.2 mA		Yes	
• 4 to 20 mA	Yes	Yes	
• -5 to +5 mA	Yes	Yes	
Input ranges (rated values), thermoelements			
• Type B	Yes	Yes	
• Type E	Yes	Yes	
• Type J	Yes	Yes	
• Type K	Yes	Yes	
• Type L	Yes	Yes	
• Type N	Yes	Yes	
• Type R	Yes	Yes	
• Type S	Yes	Yes	
• Type T	Yes	Yes	
• Type U	Yes	Yes	

#### Technical specifications (continued)

	6ES7 431-7QH00-0AB0	6ES7 431-7KF00-0AB0	6ES7 431-7KF10-0AB0
Input ranges (rated values), resistance thermometers <ul style="list-style-type: none"> <li>• Ni 100</li> <li>• Ni 1000</li> <li>• Pt 100</li> <li>• Pt 1000</li> <li>• Pt 200</li> <li>• Pt 500</li> </ul>	Yes Yes  Yes Yes Yes Yes		Yes Yes; Different characteristics selectable: Europe/U.S. Yes Yes Yes Yes
Input ranges (rated values), resistors <ul style="list-style-type: none"> <li>• 0 to 150 ohms</li> <li>• 0 to 300 ohms</li> <li>• 0 to 48 ohms</li> <li>• 0 to 600 ohms</li> <li>• 0 to 6000 ohms</li> </ul>	Yes Yes Yes Yes Yes; Usable up to 5000 Ohm		
Thermocouple (TC) <ul style="list-style-type: none"> <li>• for thermocouples</li> <li>• Temperature compensation               <ul style="list-style-type: none"> <li>- internal temperature compensation</li> <li>- external temperature compensation with compensations socket</li> <li>- external temperature compensation with Pt100</li> <li>- dynamic reference temperature value</li> </ul> </li> </ul>	Type B, E, J, K, L, N, R, S, T, U  Yes Yes Yes	Type B, E, J, K, L, N, R, S, T, U  Yes Yes  Yes	
Resistance thermometer (RTD) <ul style="list-style-type: none"> <li>• Characteristic linearization               <ul style="list-style-type: none"> <li>- for resistance thermometer</li> </ul> </li> </ul>	Pt100, Pt200, Pt500, Pt1000, Ni100, Ni1000		Pt100, Pt200, Pt500, Pt1000, Ni100, Ni1000; different characteristics selectable (Europe/U.S.)
Characteristic linearization <ul style="list-style-type: none"> <li>• Parameterizable</li> </ul>	Yes	Yes	Yes
Cable length <ul style="list-style-type: none"> <li>• Cable length, shielded, max.</li> </ul>	200 m; 50 m with thermocouples and input ranges <= 80 mV	200 m	200 m; 50 m with thermocouples and input ranges +/-80 mV
<b>Analog value creation</b>			
Integrations and conversion time/ resolution per channel <ul style="list-style-type: none"> <li>• Resolution with overrange (bit including sign), max.</li> <li>• Integration time, parameterizable</li> <li>• Basic conversion time, ms</li> <li>• Integration time, ms</li> <li>• Basic conversion time, including integration time, ms               <ul style="list-style-type: none"> <li>- additional conversion time for wire break monitoring</li> <li>- additional conversion time for resistance measurement</li> <li>- additional conversion time for wire break monitoring and resistance measurement</li> </ul> </li> <li>• Interference voltage suppression for interference frequency f1 in Hz</li> </ul>	16 bit; 16 / 16 / 16 Yes 6 / 20.1 / 23.5 ms 2.5 / 16.7 / 20 ms  4.3 / 4.3 / 4.3 ms 12 / 40.2 / 47 ms 5.5 ms 400 / 60 / 50 Hz	16 bit Yes 10 / 16.7 / 20 / 100 2.5 / 16.7 / 20 / 100 ms   1 ms (module) 400 / 60 / 50 / 10 Hz	16 bit Yes 8 / 23 / 25 ms 20 ms at 50 Hz (entire module incl. wire break)  110 ms / 4 ms  none none/ 60 / 50 Hz

# SIMATIC S7-400

## Analog modules

### SM 431 analog input module

#### Technical specifications (continued)

	6ES7 431-7QH00-0AB0	6ES7 431-7KF00-0AB0	6ES7 431-7KF10-0AB0
<b>Encoder</b>			
Connection of signal encoders			
• for current measurement as 2-wire transducer	Yes		
• for current measurement as 4-wire transducer	Yes	Yes	
• for resistance measurement with 2-conductor connection	Yes; Line resistances are also measured		
• for resistance measurement with 3-conductor connection	Yes		Yes
• for resistance measurement with 4-conductor connection	Yes	Yes	Yes
<b>Errors/accuracies</b>			
Operational limit in overall temperature range			
• Voltage, relative to input area	+/- 0,3 %; +/-0.3% at +/-250 mV, +/-500 mV, +/-1 V, +/-2.5 V, +/-5 V, 1 to 5 V, +/- 10 V; +/-0.31% at +/-80 mV; +/-0.32% at +/-50 mV; +/-0.35% at +/-25 mV;	+/- 0,3 %	
• Current, relative to input area	+/- 0,3 %; at 0 to 20 mA, +/-5 mA, +/-10 mA, +/- 20 mA, 4 to 20 mA	+/- 0,5 %	
• Impedance, relative to input area	+/- 0,3 %; +/-0.3% at 0 to 48 Ohm (4-conductor measurement), 0 to 150 Ohm (4-conductor measurement), 0 to 300 Ohm (4-conductor measurement), 0 to 600 Ohm (4-conductor measurement), 0 to 5000 Ohm (4-conductor measurement, in range of 6000 Ohm); +/-0.4% at 0 to 300 Ohm (3-conductor measurement), 0 to 600 Ohm (3-conductor measurement), 0 to 5000 Ohm (3-conductor measurement, in range of 6000 Ohm);		
• Resistance-type thermometer, relative to input area	+/- 0,4 %		+/-1 °C
Basic error limit (operational limit at 25 °C)			
• Voltage, relative to input area	+/- 0,15 %; +/-0.15% at +/-250 mV, +/-500 mV, +/-1 V, +/-2.5 V, +/-5 V, 1 to 5 V, +/-10 V; +/-0.17% at +/-80 mV; +/-0.19% at +/-50 mV; +/-0.23% at +/-25 mV;	+/- 0,1 %	
• Current, relative to input area	+/- 0,15 %; at 0 to 20 mA, +/-5 mA, +/-10 mA, +/- 20 mA, 4 to 20 mA	+/- 0,17 %	
• Impedance, relative to input area	+/- 0,15 %; +/-0.15% at 0 to 48 ohms (4-conductor measurement), 0 to 150 ohms (4-conductor measurement), 0 to 300 ohms (4-conductor measurement), 0 to 5000 ohms (4-conductor measurement, in range of 6000 ohms); +/-0.3% at 0 to 300 ohms (3-conductor measurement), 0 to 600 ohms (3-conductor measurement), 0 to 5000 ohms (3-conductor measurement, in range of 6000 ohms)		
• Resistance-type thermometer, relative to input area	+/- 0,3 %		+/-0.2 °C

#### Technical specifications (continued)

	6ES7 431-7QH00-0AB0	6ES7 431-7KF00-0AB0	6ES7 431-7KF10-0AB0
<b>Interrupts/diagnostics/ status information</b>			
Alarms			
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
• Limit value alarm	Yes; Parameterizable	Yes	Yes
Diagnostic messages			
• Diagnostics	Yes; Parameterizable	Yes	Yes
<b>Galvanic isolation</b>			
Galvanic isolation analog inputs			
• Galvanic isolation analog inputs	Yes; internal/external	Yes; internal/external	Yes; internal/external
• between the channels	No	Yes	No
<b>Permissible potential difference between the inputs (UCM)</b>	120 V AC	120 V AC	none
<b>Isolation</b>			
Isolation checked with	2120 V DC between bus and L+/M; 2120 V DC between bus and analog part; 500 V DC between bus and local ground; 707 V DC between analog part and L+/M; 2120 V DC between analog part and local ground; 2120 V DC between L+/M and local ground	1500 V DC	1500 V DC
<b>Dimensions</b>			
Width	25 mm	25 mm	25 mm
Height	290 mm	290 mm	290 mm
Depth	210 mm	210 mm	210 mm
Required slots	1	1	1
<b>Weight</b>			
Weight, approx.	500 g	650 g	650 g

# SIMATIC S7-400

## Analog modules

### SM 431 analog input module

#### Ordering data

##### SM 431 analog input modules

16 inputs, non-isolated, 13 bit

**6ES7 431-0HH00-0AB0**

8 inputs, isolated, 13 bit

**6ES7 431-1KF00-0AB0**

8 inputs, isolated, 14 bit,  
with linearization

**6ES7 431-1KF10-0AB0**

8 inputs, isolated, 14 bit

**6ES7 431-1KF20-0AB0**

16 inputs, isolated, 16 bit,  
process interrupt capability

**6ES7 431-7QH00-0AB0**

8 inputs, isolated, 16 bit,  
process interrupt capability,  
for thermocouples (I, U)

**6ES7 431-7KF00-0AB0**

8 inputs, isolated, 16 bit,  
process interrupt capability,  
for thermal resistors

**6ES7 431-7KF10-0AB0**

##### Front connector

48-pin

- with screw contacts, 1 unit
- with screw contacts, 84 units
- with spring-loaded terminals, 1 unit
- with crimp contacts, 1 unit
- with crimp contacts, 84 units

**6ES7 492-1AL00-0AA0**

**6ES7 492-1AL00-1AB0**

**6ES7 492-1BL00-0AA0**

**6ES7 492-1CL00-0AA0**

**6ES7 492-1CL00-1AB0**

1 unit; for 6ES7 431-7KF00-0AB0;  
spare part, included in scope of  
delivery

**6ES7431-7KF00-6AA0**

##### SIMATIC TOP connect

See page 6/129

##### Measuring range module for analog inputs

**6ES7 974-0AA00-0AA0**

1 module for 2 inputs (spare part)

#### Order No.

##### Cover film for labeling strips

**6ES7 492-2XX00-0AA0**

Spare part

##### Labeling sheets for machine inscription

DIN A4, for printing using laser  
printer; pack of 10

petrol

**6ES7 492-2AX00-0AA0**

light-beige

**6ES7 492-2BX00-0AA0**

yellow

**6ES7 492-2CX00-0AA0**

red

**6ES7 492-2DX00-0AA0**

##### SIMATIC Manual Collection

**6ES7 998-8XC01-8YE0**

Electronic manuals on DVD,  
multilingual: LOGO!, SIMADYN,  
SIMATIC bus components,  
SIMATIC C7, SIMATIC distributed I/O,  
SIMATIC HMI, SIMATIC Sensors,  
SIMATIC NET, SIMATIC PC Based  
Automation, SIMATIC PCS 7,  
SIMATIC PG/PC, SIMATIC S7,  
SIMATIC Software, SIMATIC TDC

##### SIMATIC Manual Collection update service for 1 year

**6ES7 998-8XC01-8YE2**

Current "Manual Collection" DVD  
and the three subsequent updates



#### Overview



- Analog outputs for the SIMATIC S7-400
- For the connection of analog actuators

#### Technical specifications

6ES7 432-1HF00-0AB0	
<b>Supply voltage</b>	
Load voltage L+	
• Rated value (DC)	24 V
<b>Input current</b>	
from backplane bus 5 V DC, max.	150 mA
from supply voltage L+, max.	400 mA
<b>Power losses</b>	
Power loss, max.	9 W
<b>Analog outputs</b>	
Number of analog outputs	8
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	30 mA
Current output, no-load voltage, max.	19 V
Output ranges, voltage	
• 0 to 10 V	Yes
• 1 to 5 V	Yes
• -10 to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• -20 to +20 mA	Yes
• 4 to 20 mA	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 k $\Omega$
• with voltage outputs, capacitive load, max.	1 $\mu$ F
• with current outputs, max.	500 $\Omega$ ; 600 ohms if common-mode-voltage reduced to <1 V
Cable length	
• Cable length, shielded, max.	200 m
<b>Analog value creation</b>	
Integrations and conversion time/ resolution per channel	
• Resolution with overrange (bit including sign), max.	13 bit
• Conversion time (per channel)	420 $\mu$ s; 420 $\mu$ s in the ranges 1 to 5 V and 4 to 20 mA; 300 $\mu$ s in all ranges

6ES7 432-1HF00-0AB0	
Settling time	
• for resistive load	0.1 ms
• for capacitive load	3.5 ms
• for inductive load	0.5 ms
<b>Errors/accuracies</b>	
Operational limit in overall temperature range	
• Voltage, relative to output area	+/- 0,5 %; +/-10 V, 0 to 10 V, 1 to 5 V
• Current, relative to output area	+/- 1 %; +/-20 mA, 4 to 20 mA
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to output area	+/- 0,5 %; +/-10 V, 0 to 10 V, 1 to 5 V
• Current, relative to output area	+/- 0,5 %; +/-20 mA, 0 to 20 mA
<b>Interrupts/diagnostics/ status information</b>	
Substitute values connectable	No
<b>Galvanic isolation</b>	
Galvanic isolation analog outputs	
• between the channels and the backplane bus	Yes
<b>Isolation</b>	
Isolation checked with	2120 V DC between bus and L+/M; 2120 V DC between bus and analog part; 500 V DC between bus and local ground; 707 V DC between analog part and L+/M; 2120 V DC between analog part and local ground; 2120 V DC between L+/M and local ground
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	210 mm
Required slots	1
<b>Weight</b>	
Weight, approx.	650 g

# SIMATIC S7-400

## Analog modules

### SM 432 analog output module

Ordering data	Order No.		Order No.
<b>SM 432 analog output module</b> 8 outputs, isolated, 13 bit	<b>6ES7 432-1HF00-0AB0</b>	<b>Labeling sheets for machine inscription</b>	
<b>Front connector</b> 48-pin		DIN A4, for printing using laser printer; pack of 10	
• with screw contacts, 1 unit	<b>6ES7 492-1AL00-0AA0</b>	petrol	<b>6ES7 492-2AX00-0AA0</b>
• with screw contacts, 84 units	<b>6ES7 492-1AL00-1AB0</b>	light-beige	<b>6ES7 492-2BX00-0AA0</b>
• with spring-loaded terminals, 1 unit	<b>6ES7 492-1BL00-0AA0</b>	yellow	<b>6ES7 492-2CX00-0AA0</b>
• with crimp contacts, 1 unit	<b>6ES7 492-1CL00-0AA0</b>	red	<b>6ES7 492-2DX00-0AA0</b>
• with crimp contacts, 84 units	<b>6ES7 492-1CL00-1AB0</b>		
<b>SIMATIC TOP connect</b>	See page, page 6/129	<b>SIMATIC Manual Collection</b>	<b>6ES7 998-8XC01-8YE0</b>
<b>Cover film for labeling strips</b> Spare part	<b>6ES7 492-2XX00-0AA0</b>	Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC	
		<b>SIMATIC Manual Collection update service for 1 year</b>	<b>6ES7 998-8XC01-8YE2</b>
		Current "Manual Collection" DVD and the three subsequent updates	

# SIMATIC S7-400

## SIPLUS analog modules

### SIPLUS SM 431 analog input module

#### Overview



- Analog inputs for SIMATIC S7-400
- For connecting voltage sensors and current sensors, thermocouples, resistors and resistance thermometers
- Resolution 13 to 16 bit

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS SM 431 analog input module

<b>Order number</b>	<b>6AG1 431-0HH00-4AB0</b>
<b>Order No. based on</b>	<b>6ES7 431-0HH00-0AB0</b>
Ambient temperature range	0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies, except for the ambient conditions
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.
<b>SIPLUS SM 431 analog input module</b> (medial exposure) 16 inputs, non-floating, 13 bit	<b>6AG1 431-0HH00-4AB0</b>
<b>Accessories</b>	See SIMATIC S7-400 analog input modules, page 6/72

# SIMATIC S7-400

## SIPLUS analog modules

### SIPLUS SM 432 analog output module

#### Overview



- Analog outputs for SIMATIC S7-400
- For connection of analog actuators

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS SM 432 analog output module

<b>Order number</b>	<b>6AG1 432-1HF00-4AB0</b>
<b>Order No. based on</b>	<b>6ES7 432-1HF00-0AB0</b>
Range of ambient temperature	0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the environmental conditions.
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.
<b>SIPLUS SM 432 analog output module</b>	<b>6AG1 432-1HF00-4AB0</b>
(medial exposure)	
8 outputs, floating, 13 bit	
<b>Accessories</b>	See SIMATIC S7-400 analog output modules, page 6/74

#### Overview



- Two-channel intelligent counter module for simple counting tasks
- For direct connection of incremental encoders
- Comparison function with 2 specifiable comparison values
- Integrated digital outputs for outputting the response when the comparison values are reached

#### Note

SIMODRIVE Sensor/Motion Connect 500 feature incremental encoders and preassembled connecting cables for counting and positioning functions.

[www.siemens.com/simatic-technology](http://www.siemens.com/simatic-technology)

#### Technical specifications

6ES7 450-1AP00-0AE0	
<b>Supply voltage</b>	
Load voltage 1L+	
• Reverse polarity protection	Yes
Load voltage 2L+	
• Reverse polarity protection	Yes
Aux. voltage 1L+, load voltage 2 L+	
• Rated value (DC)	24 V
• permissible range, lower limit (DC)	20.4 V; Dynamic 18.5 V
• permissible range, upper limit (DC)	28.8 V; dynamic 30.2 V
• non-periodic skip	
- Duration	500 ms
- Recovery time	50 s
- Value	35 V
<b>Input current</b>	
from load voltage 1L+ (without load), max.	40 mA
from backplane bus 5 V DC, max.	450 mA
<b>Encoder supply</b>	
5 V encoder supply	
• 5 V	Yes; 5.2 V +/-2%
• Short-circuit protection	Yes
• Output current, max.	300 mA
24 V encoder supply	
• 24 V	Yes; 1L+ (-3 V)
• Short-circuit protection	Yes
• Output current, max.	300 mA
<b>Power losses</b>	
Power loss, typ.	9 W

6ES7 450-1AP00-0AE0	
<b>Digital inputs</b>	
Number/binary inputs	6
Functions	1 for gate start, 1 for gate stop, 1 for setting the counter
Input voltage	
• for signal "0"	-28.8 to +5 V
• for signal "1"	+11 to +28.8 V
Input current	
• for signal "1", typ.	9 mA
Input delay (for rated value of input voltage)	
• Input frequency (with a time delay of 0.1 ms), max.	200 kHz
• for standard inputs	
- Parameterizable	Yes
- at "0" to "1", max.	2.5 μs; >= 2.5 μs (200 kHz); <= 25 μs (20 kHz)
<b>Digital outputs</b>	
Number/binary outputs	6
Functionality/short-circuit strength	Yes; Clocked electronically
Limitation of inductive shutdown voltage to	2L+ (-39 V)
Output voltage	
• for signal "0", max.	3 V
• for signal "1", min.	2L+ (-1.5 V)
Output current	
• for signal "1" rated value	0.5 A
• for signal "1" permissible range for 0 to 60 °C, min.	5 mA
• for signal "1" permissible range for 0 to 60 °C, max.	0.6 A
Output delay with resistive load	
• "0" to "1", max.	300 μs

# SIMATIC S7-400

## Function modules

### FM 450-1 counter module

#### Technical specifications (continued)

6ES7 450-1AP00-0AE0	
<b>Encoder</b>	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes; With 2 pulse trains offset by 90°
• Incremental encoder (asymmetrical)	Yes
• 24 V initiator	Yes
• 24 V directional element	Yes; 1 pulse train, 1 direction level
<b>Counter</b>	
Number of counter inputs	2; 32 bit or +/-31 bit
Counter input 5 V	
• Type	RS 422
• Terminating resistor	220 Ω
• Differential input voltage	min. 0.5 V
• Counting frequency, max.	500 kHz
Counter input 24 V	
• Input voltage, for signal "0"	-30 to +5 V
• Input voltage, for signal "1"	+11 to +30 V
• Input current, for signal "1", typ.	9 mA
• Counting frequency, max.	200 kHz
• Minimum pulse width	>= 2.5 μs (200 kHz); <= 25 μs (20 kHz) (parameterizable)
<b>Parameter</b>	
Remark	Assigned binary addresses: 64 bytes/64 bytes
<b>Galvanic isolation</b>	
Galvanic isolation digital inputs	
• between the channels and the backplane bus	Yes; Optocoupler
Galvanic isolation digital outputs	
• between the channels and the backplane bus	Yes; Optocoupler
Galvanic isolation counter	
• between the channels and the backplane bus	Yes; Optocoupler
<b>Permissible potential difference</b>	
between different circuits	75 VDC / 60 VAC
<b>Isolation</b>	
Isolation checked with	500 V
<b>Connection method</b>	
required front connector	1x 48-pin
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	210 mm
<b>Weight</b>	
Weight, approx.	650 g

#### Ordering data

#### Order No.

<b>FM 450-1 counter module</b>	<b>6ES7 450-1AP00-0AE0</b>
with 2 channels, max. 500 kHz; for incremental encoder	
<b>Front connectors</b>	
48-pin	
• with screw contacts, 1 item	<b>6ES7 492-1AL00-0AA0</b>
• with screw contacts, 84 items	<b>6ES7 492-1AL00-1AB0</b>
• with spring-loaded terminals, 1 item	<b>6ES7 492-1BL00-0AA0</b>
• with crimp contacts, 1 item	<b>6ES7 492-1CL00-0AA0</b>
• with crimp contacts, 84 items	<b>6ES7 492-1CL00-1AB0</b>
<b>Front covers for CPU and function modules</b>	
Spare part	<b>6ES7 492-1XL00-0AA0</b>

# SIMATIC S7-400

## Function modules

### FM 451 positioning module

#### Overview



- Three-channel positioning module for rapid/slow-action drives
- 4 digital outputs per channel for motor control
- Displacement measurement incremental or synchronous-serial

#### Note

Displacement measuring systems and precut/preassembled cables for counting and positioning functions are available under SIMODRIVE Sensor or Motion Connect 500.

[www.siemens.com/simatic-technology](http://www.siemens.com/simatic-technology)

#### Technical specifications

6ES7 451-3AL00-0AE0	
<b>Supply voltage</b> 24 V DC	Yes
<b>Input current</b> Current consumption, max.	550 mA
<b>Encoder supply</b> 5 V encoder supply	Yes
• 5 V	Yes
• Output current, max.	210 mA
• Cable length, max.	35 m; at max. 210 mA
24 V encoder supply	Yes
• 24 V	Yes
• Output current, max.	300 mA
• Cable length, max.	100 m; at max. 300 mA
Absolute encoder (SSI) encoder supply	Yes
• Absolute encoder (SSI)	Yes
• Output voltage	24 V DC
• Output current, max.	300 mA
• Cable length, max.	300 m; At max. 156 kbit/s
<b>Digital inputs</b> Number/binary inputs	12; 4 per axis
Functions	Reference cams, reversing cams, flying actual value setting, start/stop positioning
Input voltage	24 V
• Rated value, DC	-3 to +5 V
• for signal "0"	11 to 30 V
• for signal "1"	
Input current	6 mA
• for signal "1", typ.	6 mA
• for 2-wire sensor - for signal "1", typ.	30 mA

6ES7 451-3AL00-0AE0	
<b>Digital outputs</b> Number/binary outputs	12; 4 per axis
Functions	Rapid traverse, creep, run right, run left
Functionality/short-circuit strength	Yes
Output voltage	UP -3 V
• for signal "1", min.	UP -3 V
Output current	600 mA; with UPmax
• for signal "1" permissible range for 0 to 55 °C, max.	600 mA; with UPmax
• for signal "0" residual current, max.	0.5 mA
<b>Encoder</b> Connectable encoders	Yes
• Incremental encoder (symmetrical)	Yes
• Incremental encoder (asymmetrical)	Yes
• Absolute encoder (SSI)	Yes
Encoder signals, incremental encoder (symmetrical)	A, notA, B, notB
• Trace mark signals	N, notN
• Zero mark signal	5 V difference signal (phys. RS 422)
• Input signal	1 MHz
• Input frequency, max.	1 MHz
Encoder signals, incremental encoder (asymmetrical)	A, B
• Trace mark signals	N
• Zero mark signal	24 V
• Input voltage	50 kHz; for 25 m cable length, 25 kHz for 100 m cable length
• Input frequency, max.	100 m
• Cable length, shielded, max.	100 m
Encoder signals, absolute encoder (SSI)	5 V difference signal (phys. RS 422)
• Input signal	DATA, notDATA
• Data signal	CL, notCL
• Clock signal	13 or 25 bit serial
• Message frame length, parameterizable	
• Clock frequency, max.	1.25 MHz
• Gray code	1
• Cable length, shielded, max.	300 m; At max. 156 kbit/s
<b>Galvanic isolation</b> Galvanic isolation digital inputs	Yes
• Galvanic isolation digital inputs	Yes
Galvanic isolation digital outputs	Yes
• Galvanic isolation digital outputs	Yes
<b>Degree and class of protection</b> IP20	Yes
<b>Ambient conditions</b> Operating temperature	0 °C
• Min.	55 °C
• max.	
Storage/transport temperature	-40 °C
• Min.	70 °C
• max.	
Relative humidity	Yes
• Humidity class F	
<b>Connection method</b> required front connector	1x 48-pin
<b>Dimensions</b> Width	50 mm
Height	290 mm
Depth	210 mm
<b>Weight</b> Weight, approx.	1 300 g

# SIMATIC S7-400

## Function modules

### FM 451 positioning module

Ordering data	Order No.	Signal cable	Order No.
<b>FM 451 positioning module</b> for rapid traverse and creep speed drives	<b>6ES7 451-3AL00-0AE0</b>	<b>Signal cable</b> Pre-assembled for HTL encoder, UL/DESINA	<b>6FX5 0 2-2AL00-</b>
<b>Front connector</b> 48-pin		Pre-assembled for SSI absolute encoder, UL/DESINA	<b>6FX5 0 2-2CC11-</b>
• with screw contacts, 1 item	<b>6ES7 492-1AL00-0AA0</b>	Pre-assembled for TTL encoder 6FX2001-1, UL/DESINA	<b>6FX5 0 2-2CD01-</b>
• with screw contacts, 84 items	<b>6ES7 492-1AL00-1AB0</b>	Pre-assembled for TTL encoder 24 V, UL/DESINA	<b>6FX5 0 2-2CD24-</b>
• with spring-loaded terminals, 1 item	<b>6ES7 492-1BL00-0AA0</b>		
• with crimp contacts, 1 item	<b>6ES7 492-1CL00-0AA0</b>	Not crimped	<b>0</b>
• with crimp contacts, 84 items	<b>6ES7 492-1CL00-1AB0</b>	Module end crimped, connector case supplied	<b>1</b>
<b>Front covers for CPU and function modules</b>	<b>6ES7 492-1XL00-0AA0</b>	Motor end crimped, connector case supplied	<b>4</b>
Spare part		0 m	<b>1</b>
		100 m	<b>2</b>
		200 m	<b>3</b>
		0 m	<b>A</b>
		10 m	<b>B</b>
		20 m	<b>C</b>
		30 m	<b>D</b>
		40 m	<b>E</b>
		50 m	<b>F</b>
		60 m	<b>G</b>
		70 m	<b>H</b>
		80 m	<b>J</b>
		90 m	<b>K</b>
		0 m	<b>A</b>
		1 m	<b>B</b>
		2 m	<b>C</b>
		3 m	<b>D</b>
		4 m	<b>E</b>
		5 m	<b>F</b>
		6 m	<b>G</b>
		7 m	<b>H</b>
		8 m	<b>J</b>
		0 m	<b>K</b>
		0.0 m	<b>0</b>
		0.1 m	<b>1</b>
		0.2 m	<b>2</b>
		0.3 m	<b>3</b>
		0.4 m	<b>4</b>
		0.5 m	<b>5</b>
		0.6 m	<b>6</b>
		0.7 m	<b>7</b>
		0.8 m	<b>8</b>



#### Overview



- Very high speed electronic cam controller
- Low-cost alternative to mechanical cam controllers
- 32 cam tracks, 16 onboard digital outputs for direct output of actions
- Incremental or synchronous-serial position feedback

#### Note:

We offer position measuring systems and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500.

[www.siemens.com/simatic-technology](http://www.siemens.com/simatic-technology)

#### Technical specifications

6ES7 452-1AH00-0AE0	
<b>Supply voltage</b> 24 V DC	Yes
<b>Input current</b> Current consumption, max.	500 mA
<b>Encoder supply</b> 5 V encoder supply	Yes
• 5 V	Yes
• Output current, max.	300 mA
• Cable length, max.	32 m
24 V encoder supply	Yes
• 24 V	Yes
• Output current, max.	300 mA
• Cable length, max.	100 m
<b>Digital inputs</b> Number/binary inputs	11
Functions	Reference point switch, flying actual value setting/length measurement, brake release, enable track output no. 3 to 10
Input voltage	24 V
• Rated value, DC	-28.8 to +5 V
• for signal "0"	11 to 28.8 V
• for signal "1"	
Input current	2 mA
• for signal "0", max. (permissible quiescent current)	
• for 2-wire sensor	9 mA
- for signal "1", typ.	
<b>Digital outputs</b> Number/binary outputs	16
Functions	Cam track
Functionality/short-circuit strength	Yes
Output voltage	24 V
• Rated value (DC)	UP - 0.8 V
• for signal "1", min.	
Output current	600 mA; with UPmax
• for signal "1" permissible range for 0 to 55 °C, max.	
• for signal "0" residual current, max.	0.5 mA

6ES7 452-1AH00-0AE0	
<b>Encoder</b> Connectable encoders	
• Incremental encoder (symmetrical)	Yes
• Incremental encoder (asymmetrical)	Yes
• Absolute encoder (SSI)	Yes
• 2-wire sensor	Yes
Encoder signals, incremental encoder (symmetrical)	
• Trace mark signals	A, notA, B, notB
• Zero mark signal	N, notN
• Input signal	5 V difference signal (phys. RS 422)
• Input frequency, max.	1 MHz
Encoder signals, incremental encoder (asymmetrical)	
• Trace mark signals	A, B
• Zero mark signal	N
• Input voltage	24 V
• Input frequency, max.	50 kHz; 50 kHz for 25 m cable length; 25 kHz for 100 m cable length
Encoder signals, absolute encoder (SSI)	
• Input signal	5 V difference signal (phys. RS 422)
• Data signal	DATA, notDATA
• Clock signal	CL, notCL
• Message frame length, parameterizable	13 or 25 bit serial
• Clock frequency, max.	1 MHz
• Gray code	1
• Cable length, shielded, max.	300 m; at max. 125 kHz
<b>Galvanic isolation</b> Galvanic isolation digital inputs	No
• Galvanic isolation digital inputs	
Galvanic isolation digital outputs	No
• Galvanic isolation digital outputs	
<b>Degree and class of protection</b> IP20	Yes

# SIMATIC S7-400

## Function modules

### FM 452 cam controller

#### Technical specifications (continued)

6ES7 452-1AH00-0AE0	
<b>Ambient conditions</b>	
Operating temperature	
• Min.	0 °C
• max.	55 °C
Storage/transport temperature	
• Min.	-40 °C
• max.	70 °C
Relative humidity	
• Humidity class F	Yes
<b>Connection method</b>	
required front connector	1x 48-pin
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	210 mm
<b>Weight</b>	
Weight, approx.	650 g

#### Ordering data

#### Order No.

<b>FM 452 electronic cam controller</b>	<b>6ES7 452-1AH00-0AE0</b>
<b>Front covers for CPU and function modules</b>	<b>6ES7 492-1XL00-0AA0</b>
Spare part	
<b>Front connector</b>	
48-pin	
• with screw contacts, 1 item	<b>6ES7 492-1AL00-0AA0</b>
• with screw contacts, 84 items	<b>6ES7 492-1AL00-1AB0</b>
• with spring-loaded terminals, 1 item	<b>6ES7 492-1BL00-0AA0</b>
• with crimp contacts, 1 item	<b>6ES7 492-1CL00-0AA0</b>
• with crimp contacts, 84 items	<b>6ES7 492-1CL00-1AB0</b>
<b>Signal cable</b>	
Pre-assembled for HTL and TTL encoder, without Sub-D connector, UL/DESINA	<b>6FX5 002-2CA12-■■■■■</b>
Pre-assembled for SSI absolute encoder 6FX2001-5, without Sub-D connector, UL/DESINA	<b>6FX5 002-2CC12-■■■■■</b>
Length code	see FM 451, page 6/80

#### Overview



- Positioning module for servo and/or stepper motors in machines with high clock-pulse rates
- Can be used for simple point-to-point positioning and for complex traversing profiles
- Up to 3 independent motors can be controlled

#### Note:

We offer position measuring systems and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500.

Further information can be found on the Internet at:

[www.siemens.com/simatic-technology](http://www.siemens.com/simatic-technology)

#### Technical specifications

6ES7 453-3AH00-0AE0	
<b>Supply voltage</b>	
Auxiliary voltage	24 V
• Rated value (DC)	18.5 to 30.2 V
• dynamic range	20.4 to 28.8 V
• static area	
<b>Input current</b>	
from load voltage 1L+, max.	1 A; with 24 V position encoder; 1 A for 5 V position encoder
from load voltage 2L+ to 4L+, max.	2 A; Per channel
from backplane bus 5 V DC, max.	1.6 A; Rated current
<b>Encoder supply</b>	
5 V encoder supply	Yes
• 5 V	
• Output current, max.	300 mA
• Cable length, max.	35 m; at max. 210 mA; 25 m at max. 300 mA
24 V encoder supply	Yes
• 24 V	
• Cable length, max.	100 m; at max. 300 mA
<b>Power losses</b>	
Power loss, max.	8 W
<b>Digital inputs</b>	
Number/binary inputs	6; for each channel/axis
Functions	configurable
Input voltage	
• Rated value, DC	24 V
• for signal "0"	-3 to +5 V (max. 3 mA)
• for signal "1"	11 to 30 V (max. 7 mA)
Input delay (for rated value of input voltage)	
• for standard inputs	
- at "0" to "1", max.	15 µs; via input voltage range, 8 µs at 24 V DC
- at "1" to "0", max.	45 µs; via input voltage range

6ES7 453-3AH00-0AE0	
<b>Digital outputs</b>	
Number/binary outputs	4; for each channel/axis
Functions	configurable
Functionality/short-circuit strength	Yes
<b>Output voltage</b>	
• Rated value (DC)	24 V
• for signal "1", min.	UP - 0,3 V
<b>Output current</b>	
• for signal "1" rated value	0.5 A; at 40 °C; 0.1 A at 60 °C
• for signal "1" permissible range for 0 to 40 °C, min.	5 mA
• for signal "1" permissible range for 0 to 40 °C, max.	0.6 A
• for signal "1" permissible range for 40 to 60 °C, min.	5 mA
• for signal "1" permissible range for 40 to 60 °C, max.	0.12 A
• for signal "0" residual current, max.	2 mA
<b>Switching frequency</b>	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.25 Hz
<b>Encoder</b>	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes
• Absolute encoder (SSI)	Yes
Encoder signals, incremental encoder (symmetrical)	
• Input signal	5 V difference signal (phys. RS 422)
• Input frequency, max.	1 MHz; for 10 m cable length; 0.5 MHz for 35 m cable length
Encoder signals, absolute encoder (SSI)	
• Input signal	5 V difference signal (phys. RS 422)
• Clock frequency, max.	1.25 Mbit/s at 10 cable length (2.5 Mbit/s available soon)
• Cable length, shielded, max.	250 m; At max. 156 kbit/s

# SIMATIC S7-400

## Function modules

### FM 453 positioning module

#### Technical specifications (continued)

6ES7 453-3AH00-0AE0	
<b>Drive interface</b>	
Signal input I	
• Type	Drive interface step, signal input "READY 1"
• Function	"Power section ready" where $U_i < 1\text{ V}$ , $I_i = 2\text{ mA}$
Signal output I	
• Type	5 V (phys. RS 422)
• Function	Clock pulse, direction, enable, current control
• Differential output voltage, min.	2 V; $R_L = 100\ \Omega$
• Differential output voltage for signal "0", max.	1.1 V; $I_o = 30\ \text{mA}$
• Differential output voltage, for signal "1", min.	3.7 V; $I_o = -30\ \text{mA}$
• Load impedance	55 $\Omega$
• Pulse frequency	200 kHz; 500 kHz available soon
• Cable length, max.	35 m; 35 m with symm. transmission; 10 m with asymm. transmission
Signal output II	
• Type	Contact relay
• Function	Drive disconnection for operation
• Load	1 A/50 V/30 VA DC
Signal output III	
• Type	Analog output
• Function	Drive interface Servo: Setpoint output for drive
• Output voltage	-10 to +10 V
• Output current	-3 to +3 mA
• Cable length, max.	30 m
<b>Galvanic isolation</b>	
Galvanic isolation digital inputs	
• Galvanic isolation digital inputs	Yes; Optocoupler
Galvanic isolation digital outputs	
• Galvanic isolation digital outputs	Yes; Optocoupler
<b>Degree and class of protection</b>	
IP20	Yes
<b>Ambient conditions</b>	
Operating temperature	
• Min.	0 °C
• max.	55 °C
Storage/transport temperature	
• Min.	-40 °C
• max.	70 °C
Relative humidity	
• Humidity class F	No
<b>Connection method</b>	
required front connector	1x 48-pin
<b>Dimensions</b>	
Width	50 mm
Height	290 mm
Depth	210 mm
<b>Weight</b>	
Weight, approx.	1 620 g

#### Ordering data

#### Order No.

<b>FM 453 positioning module</b>	<b>6ES7 453-3AH00-0AE0</b>
with 3 channels/axes	
<b>Setpoint connecting cable</b>	
for 3 servo motors	<b>6FX2 002-3AD01-■■■■■</b>
for 3 stepper motors	<b>6FX2002-3AB04-■■■■■</b>
for 2 servo motors / 1 stepper motor	<b>6FX2002-3AB02-■■■■■</b>
for 1 servo motor / 2 stepper motors	<b>6FX2002-3AB03-■■■■■</b>
Length code	See page 6/80
<b>Front connector</b>	
48-pin	
• with screw contacts, 1 item	<b>6ES7 492-1AL00-0AA0</b>
• with screw contacts, 84 items	<b>6ES7 492-1AL00-1AB0</b>
• with spring-loaded terminals, 1 item	<b>6ES7 492-1BL00-0AA0</b>
• with crimp contacts, 1 item	<b>6ES7 492-1CL00-0AA0</b>
• with crimp contacts, 84 items	<b>6ES7 492-1CL00-1AB0</b>
<b>Front covers for CPU and function modules</b>	
Spare part	<b>6ES7 492-1XL00-0AA0</b>
<b>Signal cable</b>	
Pre-assembled for SSI absolute encoder, UL/DESINA	<b>6FX5 0■■2-2CC11-■■■■■</b>
Pre-assembled for TTL encoder 6FX2001-1, UL/DESINA	<b>6FX5 0■■2-2CD01-■■■■■</b>
Pre-assembled for TTL encoder 24 V, UL/DESINA	<b>6FX5 0■■2-2CD24-■■■■■</b>
Length code	See page 6/80

#### Overview



- 16-channel closed-loop control module for universal control tasks
- Can be used for temperature, pressure and flow controls
- Convenient online self-optimization for temperature controls
- Predefined controller structures
- 2 control algorithms
- 2 versions:
  - FM 455 C as continuous controller
  - FM 455 S as step or pulse controller
- With 16 analog outputs (FM 455 C) or 32 digital outputs (FM 455 S) for actuators

#### Technical specifications

	6ES7 455-0VS00-0AE0	6ES7 455-1VS00-0AE0
<b>Supply voltage</b>		
Load voltage L+		
• Rated value (DC)	24 V	24 V
• permissible range, lower limit (DC)	20.4 V	20.4 V
• permissible range, upper limit (DC)	28.8 V	28.8 V
<b>Input current</b>		
from load voltage L+ (without load), max.	440 mA; typ. 370 mA	400 mA; typ. 330 mA
<b>Power losses</b>		
Power loss, typ.	12 W	10.7 W
Power loss, max.	17.3 W	16.2 W
<b>Digital inputs</b>		
Number/binary inputs	16	16
Input characteristic curve acc. to IEC 61131, Type 2	Yes	Yes
Input voltage		
• Rated value, DC	24 V	24 V
• for signal "0"	-3 to +5 V	-3 to +5 V
• for signal "1"	13 to 30 V	13 to 30 V
Input current		
• for signal "1", typ.	7 mA	7 mA
Cable length		
• Cable length, shielded, max.	1 000 m	1 000 m
• Cable length unshielded, max.	600 m	600 m

# SIMATIC S7-400

## Function modules

### FM 455 controller module

#### Technical specifications (continued)

	6ES7 455-0VS00-0AE0	6ES7 455-1VS00-0AE0
<b>Digital outputs</b>		
Number/binary outputs		32
Functionality/short-circuit strength		Yes; Electronic
Limitation of inductive shutdown voltage to		L+ (-1.5 V)
Lamp load, max.		5 W
Controlling a digital input		Yes
Load resistance range		
• lower limit		240 Ω
• upper limit		4 kΩ
Output voltage		
• for signal "1", min.		L+ (-2.5 V)
Output current		
• for signal "1" rated value		0.1 A
• for signal "1" permissible range for 0 to 60 °C, min.		5 mA
• for signal "1" permissible range for 0 to 60 °C, max.		150 mA
• for signal "0" residual current, max.		0.5 mA
Parallel switching of 2 outputs		
• for logic links		Yes
Switching frequency		
• with resistive load, max.		100 Hz
• with inductive load, max.		0.5 Hz
• on lamp load, max.		100 Hz
Cable length		
• Cable length, shielded, max.		1 000 m
• Cable length unshielded, max.		600 m
<b>Analog inputs</b>		
Number of analog inputs	16; With thermocouples or 2-wire connection; 8 with Pt 100 or 4-wire connection	16; With thermocouples or 2-wire connection; 8 with Pt 100 or 4-wire connection
permissible input voltage for voltage input (destruction limit), max.	20 V	20 V
permissible input current for current input (destruction limit), max.	40 mA	40 mA
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	Yes
• -1.75 to +11.75 V	Yes	Yes
• -80 mV to +80 mV	Yes	Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	Yes
• 0 to 23.5 mA	Yes	Yes
• -3.5 to +23.5 mA	Yes	Yes
• 4 to 20 mA	Yes	Yes
Input ranges (rated values), thermoelements		
• Type B	Yes	Yes
• Type J	Yes	Yes
• Type K	Yes	Yes
• Type R	Yes	Yes
• Type S	Yes	Yes

#### Technical specifications (continued)

	6ES7 455-0VS00-0AE0	6ES7 455-1VS00-0AE0
Input ranges (rated values), resistance thermometers • Pt 100	Yes	Yes
Thermocouple (TC) • for thermocouples • Temperature compensation - internal temperature compensation - external temperature compensation with Pt100	Type B, J, K, R, S  Yes; Parameterizable  Yes; Parameterizable	Type B, J, K, R, S  Yes; Parameterizable  Yes; Parameterizable
Resistance thermometer (RTD) • Characteristic linearization - for resistance thermometer	Pt100 (standard)	Pt100 (standard)
Characteristic linearization • Parameterizable	Yes	Yes
Cable length • Cable length, shielded, max.	200 m; 50 m at 80 mV and thermocouples	200 m; 50 m at 80 mV and thermocouples
<b>Analog outputs</b>		
Number of analog outputs	16	
Voltage output, short-circuit protection	Yes	
Voltage output, short-circuit current, max.	25 mA	
Current output, no-load voltage, max.	18 V	
Output ranges, voltage • 0 to 10 V • -10 to +10 V	Yes Yes	
Output ranges, current • 0 to 20 mA • -20 to +20 mA • 4 to 20 mA	Yes Yes Yes	
Connection of actuators • for voltage output 2-conductor connection • for current output 2-conductor connection	Yes  Yes	
Load impedance (in rated range of output) • with voltage outputs, min. • with voltage outputs, capacitive load, max. • with current outputs, max. • with current outputs, inductive load, max.	1 k $\Omega$ 1 $\mu$ F  500 $\Omega$ 1 mH	
Cable length • Cable length, shielded, max.	200 m; 50 m at 80 mV and thermocouples	
<b>Analog value creation</b>		
Measurement principle	integrating	integrating
Integrations and conversion time/ resolution per channel • Resolution with overrange (bit including sign), max. • Conversion time (per channel)	14 bit; 12 or 14 bit, parameterizable  16.67 ms; for 12 bit: 16 2/3 ms for 60 Hz, 20 ms for 50 Hz; for 14 bit: 100 ms for 50 and 60 Hz	14 bit; 12 or 14 bit, parameterizable  16.67 ms; for 12 bit: 16 2/3 ms for 60 Hz, 20 ms for 50 Hz; for 14 bit: 100 ms for 50 and 60 Hz
Settling time • for resistive load • for capacitive load • for inductive load	0.2 ms 3.3 ms 0.5 ms	0.1 ms 3.3 ms 0.5 ms

# SIMATIC S7-400

## Function modules

### FM 455 controller module

#### Technical specifications (continued)

	6ES7 455-0VS00-0AE0	6ES7 455-1VS00-0AE0
<b>Encoder</b>		
Connection of signal encoders		
• for voltage measurement	Yes	Yes
• for current measurement as 4-wire transducer	Yes	Yes
<b>Connectable encoders</b>		
• 2-wire sensor	Yes	Yes
- Permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
<b>Errors/accuracies</b>		
Linearity error (relative to input area)	+/- 0,05 %	+/- 0,05 %
Temperature error (relative to input area)	+/- 0,005 %/K	+/- 0,005 %/K
Linearity error (relative to output area)	+/- 0,05 %	
Temperature error (relative to output area)	+/- 0,02 %/K	
<b>Operational limit in overall temperature range</b>		
• Voltage, relative to input area	+/-0.6 to +/-1%	+/-0.6 to +/-1%
• Current, relative to input area	+/-0.6 to +/-1%	+/-0.6 to +/-1%
• Resistance-type thermometer, relative to input area	+/-0.6 to +/-1%	+/-0.6 to +/-1%
• Voltage, relative to output area	+/- 0,5 %	
• Current, relative to output area	+/- 0,6 %	
<b>Basic error limit (operational limit at 25 °C)</b>		
• Voltage, relative to input area	+/-0.4 to +/-0.6 %	+/-0.4 to +/-0.6 %
• Current, relative to input area	+/-0.4 to +/-0.6 %	+/-0.4 to +/-0.6 %
• Resistance-type thermometer, relative to input area	+/-0.4 to +/-0.6 %	+/-0.4 to +/-0.6 %
• Voltage, relative to output area	+/- 0,4 %	
• Current, relative to output area	+/- 0,5 %	
<b>Interference voltage suppression for <math>f = n \times (f_1 \pm 1\%)</math>, <math>f_1 =</math> interference frequency</b>		
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	40 dB
• common mode voltage (USS < 2.5 V), min.	70 dB	70 dB
<b>Interrupts/diagnostics/status information</b>		
Substitute values connectable	Yes; Parameterizable	Yes; Parameterizable
<b>Control technology</b>		
Number of closed-loop controllers	16; With thermocouples or 2-wire connection; 8 with Pt 100 or 4-wire connection	16; With thermocouples or 2-wire connection; 8 with Pt 100 or 4-wire connection
<b>Galvanic isolation</b>		
Galvanic isolation controller		
• between the channels	No	No
• between the channels and the backplane bus	Yes; Optocoupler	Yes; Optocoupler



#### Technical specifications (continued)

	6ES7 455-0VS00-0AE0	6ES7 455-1VS00-0AE0
<b>Permissible potential difference</b>		
between inputs and MANA (UCM)	2.5 V DC	2.5 V DC
between M internally and the inputs	75 VDC / 60 VAC	75 VDC / 60 VAC
<b>Isolation</b>		
Isolation checked with	500 V DC	500 V DC
<b>Connection method</b>		
required front connector	2x 48-pin	2x 48-pin
<b>Dimensions</b>		
Width	50 mm	50 mm
Height	290 mm	290 mm
Depth	210 mm	210 mm
<b>Weight</b>		
Weight, approx.	1 400 g	1 400 g

#### Ordering data

	Order No.		Order No.
<b>FM 455 C controller module</b>	<b>6ES7 455-0VS00-0AE0</b>	<b>Front connectors</b> 48-pin • with screw contacts, 1 item • with screw contacts, 84 items • with spring-loaded terminals, 1 item • with crimp contacts, 1 item • with crimp contacts, 84 items	<b>6ES7 492-1AL00-0AA0</b> <b>6ES7 492-1AL00-1AB0</b> <b>6ES7 492-1BL00-0AA0</b> <b>6ES7 492-1CL00-0AA0</b> <b>6ES7 492-1CL00-1AB0</b>
with 16 analog outputs for 16 continuous controllers			
<b>FM 455 S controller module</b>	<b>6ES7 455-1VS00-0AE0</b>		
with 32 digital outputs for 16 step or pulse controllers			

# SIMATIC S7-400

## Function modules

### FM 458-1 DP application module

#### Overview



#### **SIMATIC FM 458-1 DP integrated in SIMATIC S7-400**

- Designed for high-performance and user-configurable closed-loop control tasks in the SIMATIC S7-400.
- Can be adapted to individual requirements as required, such as:  
Controlling, computing, closed-loop control as well as motion control. Can therefore be used flexibly for a wide variety of applications.
- Extensive library with approx. 300 function blocks:  
E.g. simple functions such as AND, ADD and OR through to complex GMC (general motion control) blocks as virtual master or gear functions.
- User-friendly graphical configuration with the SIMATIC engineering tool CFC (Continuous Function Chart) and the D7-SYS add-on software package:  
Optimum code generation by the compiler, therefore SCL is not required.
- PROFIBUS DP interface onboard.

SIMATIC FM 458-1 DP is based on more than 15 years experience with high-performance control systems and combines this know-how with the advantages of SIMATIC – the leading automation system for decades. In contrast to other function modules with static structures/functions, the FM 458-1 DP application module can be configured flexibly and adapted to individual requirements.

# SIMATIC S7-400

## Function modules

FM 458-1 DP application module  
FM 458-1 DP basic module

### Overview



- Basic module for handling arithmetic, closed-loop control and open-loop control tasks
- PROFIBUS DP interface for connection of distributed I/O and drives
- Modular design with expansion modules for I/O and communication

### Technical specifications

6DD1 607-0AA2	
<b>Supply voltage</b>	
5 V DC	Yes
24 V DC	Yes
permissible range (ripple included), lower limit (DC)	4.8 V
permissible range (ripple included), upper limit (DC)	5.25 V
<b>Input current</b>	
Current consumption, typ.	1.5 A
Current consumption, max.	3 A
<b>Encoder supply</b>	
Backup battery	
• Battery operation	Yes
- Backup current, max.	15 $\mu$ A
<b>Memory</b>	
Backup	
• present	Yes; SRAM
<b>Time of day</b>	
Clock	
• Hardware clock (real-time clock)	Yes
• Resolution	500 ms
<b>Digital inputs</b>	
Number/binary inputs	8; Connector X2
Input voltage	
• Rated value, DC	24 V
• for signal "0"	-1 to +6 V
• for signal "1"	13.5 to 33 V
Input current	
• for signal "0", max. (permissible quiescent current)	0 mA
• for signal "1", typ.	3 mA; at 24 V
Input delay (for rated value of input voltage)	
• for standard inputs	
- at "0" to "1", max.	5 $\mu$ s
<b>Interfaces</b>	
PROFIBUS DP	
• equidistance	Yes; With connection to interrupt tasks
• Direct data exchange (slave-to-slave communication)	Yes
<b>Interrupts/diagnostics/status information</b>	
Alarms	
• Alarms	Yes
<b>Galvanic isolation</b>	
Galvanic isolation digital inputs	
• Galvanic isolation digital inputs	No; only via optional interface modules
<b>Dimensions</b>	
Required slots	1
<b>Weight</b>	
Weight, approx.	1 000 g

# SIMATIC S7-400

## Function modules

FM 458-1 DP application module  
FM 458-1 DP basic module

Ordering data	Order No.	Order No.
<b>FM 458-1 DP application module</b> Basic module for computing, closed-loop control and open-loop control tasks; with PROFIBUS DP interface	<b>6DD1 607-0AA2</b>	
<b>Micro Memory Card</b> For FM 458-1 DP basic module 2 MB 4 MB 8 MB	<b>6ES7 953-8LL31-0AA0</b> <b>6ES7 953-8LM20-0AA0</b> <b>6ES7 953-8LP20-0AA0</b>	
<b>FM 458-1 DP Know-How-Protect</b> For protection of technological application modules against unauthorized copying	<b>6DD1 607-0GA0</b>	
<b>SC 64 interface cable</b> To connect FM 458-1 to the serial port of a programming device/ PC	<b>6DD1 684-0GE0</b>	
<b>SB10 interface module</b> To connect 8 binary I/Os to FM 458-1 DP	<b>6DD1 681-0AE2</b>	
<b>SB61 interface module</b> To connect 8 binary I/Os to FM 458-1 DP, input voltage: 24/48 V DC	<b>6DD1 681-0EB3</b>	
<b>SU12 interface module</b> To connect 10 signals to FM 458-1 DP	<b>6DD1 681-0AJ1</b>	
<b>RS 485 bus connector with 90° cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface	<b>6ES7 972-0BA12-0XA0</b> <b>6ES7 972-0BB12-0XA0</b>	
<b>RS 485 bus connector with angled cable outlet</b> Max. transfer rate 12 Mbit/s Without PG interface With PG interface		<b>6ES7 972-0BA42-0XA0</b> <b>6ES7 972-0BB42-0XA0</b>
<b>RS 485 bus connector with 90° cable outlet for FastConnect connection system</b> Max. transfer rate 12 Mbit/s Without PG interface • 1 unit • 100 units With PG interface • 1 unit • 100 units		<b>6ES7 972-0BA52-0XA0</b> <b>6ES7 972-0BA52-0XB0</b> <b>6ES7 972-0BB52-0XA0</b> <b>6ES7 972-0BB52-0XB0</b>
<b>PROFIBUS FastConnect bus cable</b> Standard type with special design for quick mounting, 2-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum ordering quantity 20 m Preferred lengths: 20 m 50 m 100 m		<b>6XV1 830-0EH10</b>  <b>6XV1 830-0EN20</b> <b>6XV1 830-0EN50</b> <b>6XV1 830-0ET10</b>

# SIMATIC S7-400

## Function modules

FM 458-1 DP application module  
EXM 438-1 input/output expansion

### Overview



- Optional plug-in expansion module for the FM 458-1 DP basic module
- For input and output of time-critical signals
- With digital and analog inputs/outputs
- Incremental and absolute value encoders can be connected
- 4 high-resolution analog outputs
- Fan-free operation up to 40°C

### Technical specifications

6DD1 607-0CA1	
<b>Supply voltage</b>	
5 V DC	Yes
24 V DC	Yes; to be set up externally
<b>Input current</b>	
Current consumption, typ.	1.5 A
<b>Encoder supply</b>	
Output voltage	about 14 V (non-isolated)
Output current, rated value	100 mA
Output current	
• Short-circuit protection	Yes; Electronic
<b>Digital inputs</b>	
Number/binary inputs	16
Input voltage	
• Rated value, DC	24 V
• for signal "0"	-1 to +6 V or input open
• for signal "1"	+13 to +33 V
Input current	
• for signal "0", max. (permissible quiescent current)	0 mA
• for signal "1", typ.	3 mA
Input delay (for rated value of input voltage)	
• for standard inputs - at "0" to "1", max.	200 µs
<b>Digital outputs</b>	
Number/binary outputs	8
Functionality/short-circuit strength	Yes; electronic/thermal
• Response threshold, typ.	250 mA
Limitation of inductive shutdown voltage to	Supply voltage +1 V
Output voltage	
• for signal "0", max.	3 V
• for signal "1", max.	Supply voltage -2.5 V
Output current	
• for signal "1" rated value	50 mA
• for signal "1" permissible range for 0 to 40 °C, min.	100 mA
• for signal "0" residual current, max.	20 µA
• Total switching current	80% at 50 °C all outputs 50 mA
Output delay with resistive load	
• "0" to "1", max.	15 µs

6DD1 607-0CA1	
<b>Analog inputs</b>	
Number of analog inputs	5; Differential inputs
Input ranges (rated values), voltages	
• -10 V to +10 V	Yes; -10 V: +/-4 LSB; to +10 V: +/-4 LSB (1 LSB = 4.88 mV)
• Input resistance (-10 V to +10 V)	470 kΩ
<b>Analog outputs</b>	
Number of analog outputs	8; 4 outputs 16 bit; 4 outputs 12 bit
Voltage output, short-circuit protection	Yes; relative to frame
Voltage output, short-circuit current, max.	16 bits: 27 mA; 12 bits: 100 mA
Output ranges, voltage	
• -10 to +10 V	Yes
<b>Analog value creation</b>	
Integrations and conversion time/ resolution per channel	
• Resolution with overrange (bit including sign), max.	4 AO: 16 bits, 4 AO: 12 bits, 5 AI: 12 bits
• Conversion time (per channel)	4 AO (16 bits): 2 µs; 4 AO (12 bits): 4 µs; 5 AI: 45 µs
<b>Encoder</b>	
Number of connectable encoders, max.	12; 8 incremental encoders (syn- chronizable), 4 absolute encoders
Connectable encoders	
• Incremental encoder (symmetrical)	Yes
• Incremental encoder (asymmetrical)	Yes
• Absolute encoder (SSI)	Yes; Single or multturn encoder with SSI (synchronous serial) or EnDat interface
Encoder signals, incremental encoder (symmetrical)	
• Trace mark signals	1) for tracks A and B (90° out of phase), poss. with zero pulse N; 2) for separate forward and backward track
• Input signal	With 0 signal: -5 to 0 V; with 1 signal: +3 to +5 V; permissible input voltage range: differential voltage -5 to +5 V; max. input current: 15 mA (import- tant: not limited on module side!)

# SIMATIC S7-400

## Function modules

FM 458-1 DP application module  
EXM 438-1 input/output expansion

### Technical specifications (continued)

6DD1 607-0CA1	
Encoder signals, incremental encoder (asymmetrical)	
<ul style="list-style-type: none"> <li>Trace mark signals</li> </ul>	Track A and B (phase-shifted by 90 degrees), possibly with zero pulse N
<ul style="list-style-type: none"> <li>Input voltage</li> </ul>	with 0 signal: -30 to +4 V (at 15 mA load); with 1 signal: +8 to 30 V (at 15 mA load); permissible input voltage range: differential voltage -30 to +30 V
Encoder signals, absolute encoder (SSI)	
<ul style="list-style-type: none"> <li>Input signal</li> <li>Data signal</li> <li>Clock frequency, max.</li> </ul>	5 V acc. to RS 422 Dual-, Gray-, Gray-Excess-Code 2 MHz; 100 kHz to 2 MHz (depending on cable length)
<b>Errors/accuracies</b>	
Linearity error (relative to output area)	(+/- 1 LSB )
<b>Galvanic isolation</b>	
Galvanic isolation digital inputs	
<ul style="list-style-type: none"> <li>Galvanic isolation digital inputs</li> </ul>	No
Galvanic isolation digital outputs	
<ul style="list-style-type: none"> <li>Galvanic isolation digital outputs</li> </ul>	No
Galvanic isolation analog inputs	
<ul style="list-style-type: none"> <li>Galvanic isolation analog inputs</li> </ul>	No
Galvanic isolation analog outputs	
<ul style="list-style-type: none"> <li>Galvanic isolation analog outputs</li> </ul>	No
<b>Dimensions</b>	
Required slots	1
<b>Weight</b>	
Weight, approx.	1 kg

### Ordering data

### Order No.

<b>EXM 438-1 input/output expansion</b>	<b>6DD1 607-0CA1</b>
For direct exchange of digital and analog signals between FM 458-1 DP and the plant	
<b>SB10 interface module</b>	<b>6DD1 681-0AE2</b>
To connect 8 binary inputs or outputs to FM 458-1 DP	
<b>SB61 interface module</b>	<b>6DD1 681-0EB3</b>
To connect 8 binary inputs to FM 458-1 DP, input voltage: 24/48 V DC	
<b>SB71 interface module</b>	<b>6DD1 681-0DH1</b>
To connect 8 binary outputs to FM 458-1 DP, output voltage: 24/48 V DC	
<b>SU12 interface module</b>	<b>6DD1 681-0AJ1</b>
To connect 10 signals to FM 458-1 DP	
<b>SU13 interface module</b>	<b>6DD1 681-0GK0</b>
To connect 50 signals to FM 458-1 DP	
<b>SC 62 interface cable</b>	<b>6DD1 684-0GC0</b>
To connect EXM 438-1 with up to 5 SBxx or SU12	
<b>SC 63 interface cable</b>	<b>6DD1 684-0GD0</b>
To connect EXM 438-1 with an SU13	

# SIMATIC S7-400

## Function modules

### FM 458-1 DP application module – EXM 448 universal communications expansion module

#### Overview



- Optional expansion module for the FM 458-1 DP basic module
- For fast communication over PROFIBUS DP or SIMOLINK
- EXM 448: With vacant slot for a MASTERDRIVES option module

#### Technical specifications

	6DD1 607-0EA0
<b>Supply voltage</b> 5 V DC	Yes
<b>Input current</b> Current consumption, typ.	0.8 A
<b>Dimensions</b> Required slots	1
<b>Weight</b> Weight, approx.	0.8 kg

#### Ordering data

**EXM 448 universal communications expansion module**  
For fast communication, for example, with drives; with free slot for MASTERDRIVES option module

#### Order No.

**6DD1 607-0EA0**

# SIMATIC S7-400

## Function modules

### FM 458-1 DP application module – EXM 448-2 universal communications expansion module

#### Overview



- Optional plug-in expansion module for the FM 458-1 DP basic module
- For high-speed communication over up to 2 SIMOLINK interfaces
- For coupling several FM 458-1 DP application modules in synchronism with the sampling time

#### Technical specifications

	6DD1 607-0EA2
<b>Supply voltage</b> 5 V DC	Yes
<b>Input current</b> Current consumption, typ.	0.6 A
<b>Dimensions</b> Required slots	1
<b>Weight</b> Weight, approx.	0.9 kg

#### Ordering data

**EXM 448-2 universal communications expansion**  
For high-speed communication with drives; for establishing two SIMOLINK fiber optic connections

#### Order No.

**6DD1 607-0EA2**




# SIMATIC S7-400

## Function modules

FM 458-1 DP application module  
D7-SYS

### Overview

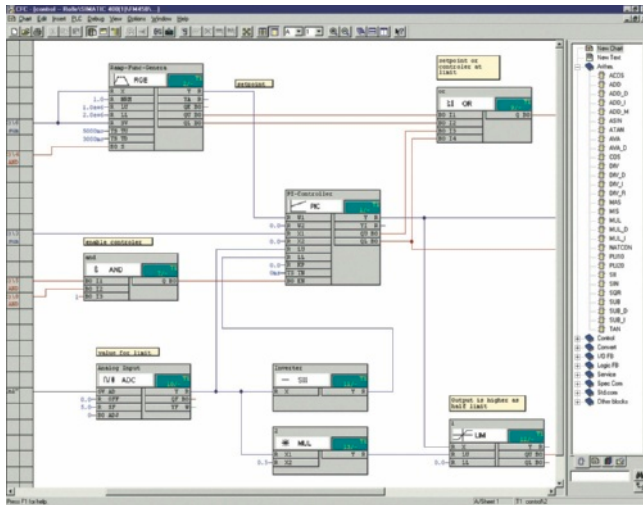

- Add-on for STEP 7/CFC/SFC for configuration of control and automation tasks with T400, FM 458, SIMADYN D or SIMATIC TDC
- Contains function blocks for every application
- Scope of delivery: Software packages D7-SYS, CFC, SFC, TH-PO
- Optional:  
D7-FB-Gen, function block generator for the creation of customized function blocks

### Ordering data

### Order No.

#### SIMATIC D7-SYS V8.0

Task:  
Function block library for configuring closed-loop control and automation tasks

Target system:

SIMATIC S7-400/FM 458/  
SIMATIC TDC/T400/SIMADYN

Requirement:

Windows XP, Windows 7 32/64-bit,  
Windows Server 2003/2008

Type of delivery:

on CD, German, English,  
with electronic documentation

Floating license

**6ES7 852-0CC03-0YA5**

Upgrade License V7.x and higher

**6ES7 852-0CC03-0YE5**

Software Update Service<sup>1)</sup>

**6ES7 852-0CC01-0YL5**

#### SIMATIC D7 FB Gen V2.1

**6DD1 805-5DA0**

Function block generator

#### SIMATIC Manual Collection

**6ES7 998-8XC01-8YE0**

Electronic manuals on DVD,  
multilingual: LOGO!, SIMADYN,  
SIMATIC bus components,  
SIMATIC C7, SIMATIC distributed I/O,  
SIMATIC HMI, SIMATIC Sensors,  
SIMATIC NET, SIMATIC PC Based  
Automation, SIMATIC PCS 7,  
SIMATIC PG/PC, SIMATIC S7,  
SIMATIC Software, SIMATIC TDC

#### SIMATIC Manual Collection update service for 1 year

**6ES7 998-8XC01-8YE2**

Current "Manual Collection" DVD  
and the three subsequent updates

<sup>1)</sup> For more information on the software update service, see Section 11,  
page 11/3.

# SIMATIC S7-400

## Function modules

### FM 458-1 DP application module Accessories

#### Overview SC64 interface cable



(Similar to figure)

Interface cable for FM 458-1 DP basic module and SB10, SB60, SB61 and SU12 interface modules.

#### Overview SC63 interface cable



This cable is used to connect the SIMATIC TDC SM500 peripheral (I/O) module or the SIMATIC S7-400 EXM 438-1 expansion module to a SU13 interface module.

#### Overview SC62 interface cable



This cable is used to connect the SIMATIC TDC SM500 peripheral module (I/O) or the SIMATIC S7-400 EXM 438-1 expansion module to up to 5 interface modules SB10, SB60, SB70, SB61 SB71 and/or SU12.

#### Overview SB10 interface module



Similar to figure.

The interface module is used to connect 8 digital inputs or outputs.

#### Overview SB61 interface module



It is used to connect 8 digital inputs with conversion from 24/48 V DC to 24 V DC.

#### Overview SU12 interface module



The interface module is used to connect 10 signals; there is no electronic conversion.

#### Overview SB71 interface module



The interface module is used to connect 8 digital outputs with conversion of the 24 V DC voltage on the module side to a max. of 24/48 V DC/AC on the plant side using transistors.

#### Overview SU13 interface module



This interface module can be used to connect 50 signals; there is no electronic conversion.

# SIMATIC S7-400

## Function modules

### FM 458-1 DP application module Accessories

#### Technical specifications

##### Technical specifications SB10 interface module

Number of digital inputs or outputs	8
Electrical isolation	No
Max. cable cross-section	1.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.3 kg

##### Technical specifications SB61 interface module

Number of digital inputs for	8
• Input voltage	24/48 V DC
Electrical isolation	Yes, via optocoupler
Max. cable cross-section	1.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.32 kg

##### Technical specifications SB71 interface module

Number of digital outputs	8
• Output voltage, max	24/48 V DC
Output current, max.	40 mA, short-circuit proof
Electrical isolation	Yes, via optocoupler
Max. cable cross-section	1.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	45 x 130 x 156

##### Technical specifications SU12 interface module

Number of signal cables which can be connected	10
Signal amplitude per signal, max.	60 V, 0.5 A
Electrical isolation	No
Max. cable cross-section	1.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.28 kg

##### Technical specifications SU13 interface module

Number of signal cables which can be connected	50
Signal amplitude per signal, max.	60 V, 0.5 A
Electrical isolation	No
Max. cable cross-section	1.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.3 kg

#### Ordering data

#### Order No.

<b>SC64 interface cable</b>	<b>6DD1 684-0GE0</b>
between FM 458-1 DP (X2) module with SBxx or SU12 interface module, 2 m long	
<b>SC62 interface cable</b>	<b>6DD1 684-0GC0</b>
between SM500 or EXM 438-1 module and max. 5 SB10, SB60, SB70, SB61 SB71 interface modules and/or SU12, 2 m long	
<b>SC63 interface cable</b>	<b>6DD1 684-0GD0</b>
between SM500 or EXM 438-1 module and SU13 interface module, 2 m long	
<b>SB10 interface module</b>	<b>6DD1 681-0AE2</b>
8 digital inputs/outputs 24 V DC	
<b>SB61 interface module</b>	<b>6DD1 681-0EB3</b>
8 digital inputs 24/48 V DC	
<b>SB71 interface module</b>	<b>6DD1 681-0DH1</b>
8 digital outputs with transistors, 24/48 V DC	
<b>SU12 interface module</b>	<b>6DD1 681-0AJ1</b>
with plug-in connector, 10-pole	
<b>SU13 interface module</b>	<b>6DD1 681-0GK0</b>
with screw-type plug-in connector	

# SIMATIC S7-400

## SIPLUS function modules

### SIPLUS FM 450-1 counter modules

#### Overview



- Two-channel, intelligent counter module for simple counting tasks
- For direct connection of incremental encoders
- Comparison functions with two definable comparison values
- Integrated digital outputs for the output of the reaction on reaching the comparison values

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS FM 450-1 counter module

<b>Order No.</b>	<b>6AG1 450-1AP00-4AE0</b>
<b>Order No. based on</b>	<b>6ES7 450-1AP00-0AE0</b>
Ambient temperature range	0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions.
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K

#### Note:

We offer incremental sensors and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500.

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.
<b>SIPLUS FM 450-1 counter module</b> (medial exposure) with 2 channels, max. 500 kHz; for incremental encoder	<b>6AG1 450-1AP00-4AE0</b>
<b>Accessories</b>	See SIMATIC FM 450-1, page 6/78

# SIMATIC S7-400

## SIPLUS function modules

### SIPLUS DCF 77 radio clock module

#### Overview



This module can be used to synchronize the real-time clock of the SIMATIC S7-200, S7-300 and S7-400 automation systems with the official time of the DCF 77 time signal transmitter of the Physikalisch-Technische Bundesanstalt Braunschweig.

The time is received by means of a DCF receiver (antenna with electronics) which is connected via two digital inputs on the SIMATIC and SIPLUS together with a software driver included in the scope of delivery (function block FB). The function blocks are available on the Internet for downloading.

[www.siemens.com/siplus](http://www.siemens.com/siplus) - Support - Tools and Downloads!

#### Technical specifications

SIPLUS DCF 77 radio clock module	
Radio frequency	77.5 Hz
Power supply	24 V DC (20.4 to 28.8 DC)
Power consumption, typ.	50 mA
Dimensions (W x H x D)	75 mm x 125 mm <sup>1)</sup> x 75 mm

<sup>1)</sup> Additionally 25 mm (0.98 in) for heavy duty threaded joint and bending radius for cables

#### Ordering data

#### Order No.

##### SIPLUS DCF 77 radio clock module

For synchronizing SIMATIC S7-200, S7-300 and S7-400 with the official time of the DCF 77 time signal transmitter of the Physikalisch-Technische Bundesanstalt Braunschweig

**6AG1 057-1AA03-0AA0**

### Overview



- For high-performance transmission of messages via point-to-point connections (high message rate)
- Physical interface: RS 422/RS 485 (X.27)
- Up to 32 nodes
- Protocol implemented: ASCII, 3964 (R)
- Simple parameterization via a parameterization tool integrated into STEP 7

### Technical specifications

6ES7 440-1CS00-0YE0	
<b>Supply voltage</b>	
5 V DC	Yes
24 V DC	Yes
<b>Input current</b>	
from backplane bus 5 V DC, max.	360 mA
<b>Power losses</b>	
Power loss, typ.	1.7 W
<b>Memory</b>	
Memory requirements per interface in memory card of S7-CPU	1 to 5 Kbytes for parameters
<b>Interfaces</b>	
Number of interfaces	1
Interface physics, RS 422/RS 485 (X.27)	Yes
RS 422/485, cable length, shielded, max.	1 200 m
Point-to-point	
• Integrated protocol driver	
- 3964 (R)	Yes
- ASCII	Yes
• Transmission speed, RS 422/485	
- with 3964 (R) protocol, max.	115.2 kbit/s
- with ASCII protocol, max.	115.2 kbit/s
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	210 mm
<b>Weight</b>	
Weight, approx.	600 g

### Ordering data

### Order No.

<b>CP 440 communications module</b> with one RS 422/485 (X.27) interface	<b>6ES7 440-1CS00-0YE0</b>
<b>RS 422/485 connecting cable</b> for linking to SIMATIC S7	
5 m	<b>6ES7 902-3AB00-0AA0</b>
10 m	<b>6ES7 902-3AC00-0AA0</b>
50 m	<b>6ES7 902-3AG00-0AA0</b>

# SIMATIC S7-400

## Communication

### CP 441-1, CP 441-2

#### Overview



- For fast, high-performance serial data exchange via point-to-point connection
- 2 versions:
  - CP 441-1 with 1 variable interface for easy point-to-point coupling.
  - CP 441-2 with 2 variable interfaces for high-performance point-to-point connection.
- Plug-in interface modules for different physical transmission properties: RS 232C (V.24), 20 mA (TTY) or RS 422/RS 485 (X.27)
- Implemented protocols: ASCII, 3964 (R), printer driver; for CP 441-2 additional RK 512 and Modbus RTU (reloadable)
- Simple parameter assignment using tool integrated in STEP 7

#### Technical specifications

	6ES7 441-1AA05-0AE0 CP 441-1	6ES7 441-2AA05-0AE0 CP 441-2
<b>Supply voltage</b>		
5 V DC	Yes	Yes
24 V DC	Yes	Yes
<b>Input current</b>		
from backplane bus 5 V DC, max.	300 mA	300 mA
<b>Power losses</b>		
Power loss, typ.	2.1 W; incl. 1x20 mA TTY module	2.7 W; incl. 2x20mA TTY module
<b>Memory</b>		
Memory requirements per interface in memory card of S7-CPU	1 to 5 KB for parameters; 0 to 55 KB for message texts	1 to 5 KB for parameters; 0 to 55 KB for message texts; 0 to 64 KB for loadable drivers
<b>Interfaces</b>		
Number of interfaces	1; variable	2; variable
Interface physics, 20 mA (TTY)	Yes	Yes
Interface physics, RS 232C (V.24)	Yes	Yes
Interface physics, RS 422/RS 485 (X.27)	Yes	Yes
20mA (TTY), cable length, shielded, max.	1 000 m; At 9600 bps	1 000 m; At 9600 bps
RS 232, cable length, shielded, max.	15 m; At 115200 bps	15 m; At 115200 bps
RS 422/485, cable length, shielded, max.	1 200 m; At 19200 bps	1 200 m; At 19200 bps
<b>Point-to-point</b>		
• Transmission rate, max.	115.2 kbit/s; Min. 300 bps	115.2 kbit/s; Min. 300 bps
• supported printers	HP-Deskjet, HP-Laserjet, IBM-Proprinter, user-defined	HP-Deskjet, HP-Laserjet, IBM-Proprinter, user-defined
• Integrated protocol driver		
- 3964 (R)	Yes	Yes
- ASCII	Yes	Yes
- RK512	No	Yes
- Printer	Yes	Yes
- customer-specific drivers reloadable	No	No
• Transmission speed, 20 mA (TTY)		
- with 3964 (R) protocol, max.	19.2 kbit/s	19.2 kbit/s
- with ASCII protocol, max.	19.2 kbit/s	19.2 kbit/s
- with printer driver, max.,	19.2 kbit/s	19.2 kbit/s
- with RK 512 protocol, max.		19.2 kbit/s



### Technical specifications (continued)

	6ES7 441-1AA05-0AE0 CP 441-1	6ES7 441-2AA05-0AE0 CP 441-2
<ul style="list-style-type: none"> <li>Transmission speed, RS 422/485               <ul style="list-style-type: none"> <li>- with 3964 (R) protocol, max. 115.2 kbit/s</li> <li>- with ASCII protocol, max. 115.2 kbit/s</li> <li>- with printer driver, max., 115.2 kbit/s</li> <li>- with RK 512 protocol, max. 115.2 kbit/s</li> </ul> </li> <li>Transmission speed, RS232               <ul style="list-style-type: none"> <li>- with 3964 (R) protocol, max. 115.2 kbit/s</li> <li>- with ASCII protocol, max. 115.2 kbit/s</li> <li>- with printer driver, max., 115.2 kbit/s</li> <li>- with RK 512 protocol, max. 115.2 kbit/s</li> </ul> </li> </ul>		
<b>Ambient conditions</b>		
Operating temperature		
<ul style="list-style-type: none"> <li>Min. 0 °C</li> <li>max. 60 °C</li> </ul>		
Relative humidity		
<ul style="list-style-type: none"> <li>Operation, max. 95 %</li> </ul>		
<b>Dimensions</b>		
Width	25 mm	25 mm
Height	290 mm	290 mm
Depth	210 mm	210 mm
<b>Weight</b>		
Weight, approx.	580 g; Interface modules: 80 g	580 g; Interface modules: 80 g

### Ordering data

	Order No.		Order No.
<b>CP 441-1 communications module</b>	6ES7 441-1AA05-0AE0	<b>TTY connecting cable</b>	
With 1 variable interface for interface submodules; including configuration package on CD		5 m	6ES7 902-2AB00-0AA0
		10 m	6ES7 902-2AC00-0AA0
		50 m	6ES7 902-2AG00-0AA0
<b>CP 441-2 communications module</b>	6ES7 441-2AA05-0AE0	<b>RS 422/485 connecting cable</b>	
With 2 variable interfaces for interface submodules; including configuration package on CD		5 m	6ES7 902-3AB00-0AA0
		10 m	6ES7 902-3AC00-0AA0
		50 m	6ES7 902-3AG00-0AA0
<b>Interface submodules</b>		<b>Loadable drivers for CP 441-2</b>	
RS 232C (V.24)	6ES7 963-1AA10-0AA0	Modbus master (RTU format)	
20 mA (TTY)	6ES7 963-2AA10-0AA0	<ul style="list-style-type: none"> <li>Single license</li> <li>Single license, without software or documentation</li> </ul>	6ES7 870-1AA01-0YA0 6ES7 870-1AA01-0YA1
RS 422/485 (X.27)	6ES7 963-3AA10-0AA0	Modbus slave (RTU format)	
<b>RS 232 connecting cable</b>		<ul style="list-style-type: none"> <li>Single license</li> <li>Single license, without software or documentation</li> </ul>	6ES7 870-1AB01-0YA0 6ES7 870-1AB01-0YA1
5 m	6ES7 902-1AB00-0AA0		
10 m	6ES7 902-1AC00-0AA0		
15 m	6ES7 902-1AD00-0AA0		

# SIMATIC S7-400

## Communication

### Loadable drivers for CP 441-2 and CP 341

#### Overview

- Drivers for Modbus protocol with RTU message format; communication as master or slave
- Downloadable onto CP 341 and CP 441-2 (6ES7 441-2AA04-0AE0)

#### Technical specifications

##### Parameterization software

Type of license

Target system

##### Loadable drivers for CP 441-2 and CP 341

Simple license, copy license

SIMATIC CP 341, SIMATIC CP 441-2

##### Technical specifications

##### Modbus Master

- Modbus protocol with RTU format
- Master/slave coupling: SIMATIC S7 is master
- Function codes implemented: 01, 02, 03, 04, 05, 06, 07, 08, 11, 12, 15, 16
- No V.24 control and signal lines
- CRC polynomial:  $x^{16} + x^{15} + x^2 + 1$
- Interfaces: TTY (20 mA); V.24 (RS 232 C); X.27 (RS 422/485) 2-wire or 4-wire
- Receive mailbox specified on BRCV
- Character delay time 3.5 characters or multiple thereof
- Broadcast message possible
- Transmission rate 300 bit/s up to 76800 bit/s (TTY up to 19200 bit/s)
- Character frame
- With/without RS 485 operation for 2-wire connections
- With/without modem operation (ignore smudge characters)
- Response monitoring time 100 ms to 25.5 s in steps of 100 ms
- Factor for the character delay time 1-10
- Default setting of receive line when using the X.27 interface module

Adjustable parameters

Adjustable parameters

##### Modbus slave

- Modbus protocol with RTU format
- Master/slave coupling: SIMATIC S7 is slave
- Function codes implemented: 01, 02, 03, 04, 05, 06, 08, 15, 16
- No V.24 control and signal line
- CRC polynomial:  $x^{16} + x^{15} + x^2 + 1$
- Interfaces: TTY (20 mA), V.24 (RS 232C), X.27 (RS 422/485) 2-wire or 4-wire
- Communications FB 180, instance DB 180 (use of a multi-instance)
- Conversion of the Modbus data address to S7 data areas. Data areas which can be processed: DB, bit memories, outputs, inputs, timers, counters
- Character delay time 3.5 characters or multiple thereof
- Transmission rate 300 bit/s up to 76800 bit/s (TTY up to 19200 bit/s)
- Character frame
- Slave address of CP (1 to 255)
- With/without RS 485 operation for 2-wire connection
- With/without modem operation (ignore smudge characters)
- Factor for the character delay time 1-10
- Number of work DB (for FB processing)
- Enabling of memory areas for writing by the master
- Default setting of receive line when using the X.27 interface module
- Conversion of Modbus addresses to S7 data areas

Ordering data	Order No.		Order No.
<b>Modbus Master V3.1</b> Task: Communication via Modbus protocol with RTU format, SIMATIC S7 as master Requirement: CP 341 or CP 441-2; STEP 7 V4.02 and higher Delivery package: Driver program/documentation, English, German, French Single license Single license, without software and documentation	<b>6ES7 870-1AA01-0YA0</b> <b>6ES7 870-1AA01-0YA1</b>	<b>SIMATIC Manual Collection</b> Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC	<b>6ES7 998-8XC01-8YE0</b>
<b>Modbus Slave V3.1</b> Task: Communication via Modbus protocol with RTU format, SIMATIC S7 as slave Requirement: CP 341 or CP 441-2; STEP 7 V4.02 and higher Delivery package: Driver program/documentation, English, German, French Single license Single license, without software and documentation	<b>6ES7 870-1AB01-0YA0</b> <b>6ES7 870-1AB01-0YA1</b>	<b>SIMATIC Manual Collection update service for 1 year</b> Current "Manual Collection" DVD and the three subsequent updates	<b>6ES7 998-8XC01-8YE2</b>

# SIMATIC S7-400

## Communication

### CP 443-5 Basic

#### Overview



DP-M	DP-S	FMS	PG/OP	S7/S5	
		●	●	●	

- Connection of the S7-400 to PROFIBUS
- Communication services:
  - PG/OP communication
  - S7 communication
  - Open communication (SEND/RECEIVE)
  - PROFIBUS FMS
- Time synchronization
- Easy programming and configuration over PROFIBUS
- Cross-network programming device communication through S7 routing
- Can be easily integrated into the SIMATIC S7-400 system
- Modules can be replaced without the need for a PG
- SIMATIC H system operation for redundant S7 communication

#### Technical specifications

<b>Order No.</b>	<b>6GK7 443-5FX02-0XE0</b>
<b>Product-type designation</b>	<b>CP 443-5 Basic</b>
<b>Transmission rate</b>	
Transmission rate at interface 1 in accordance with PROFIBUS	9.6 kbit/s ... 12 Mbit/s
<b>Interfaces</b>	
Number of electrical connections at interface 1 in accordance with PROFIBUS	1
Design of electrical connection at interface 1 in accordance with PROFIBUS	9-pin Sub-D socket (RS485)
<b>Supply voltage, current consumption, power loss</b>	
Type of voltage of supply voltage	DC
Supply voltage 1 from backplane bus	5 V
Relative symmetrical tolerance at 5 V with DC	5 %
Consumed current from backplane bus at 5 V for DC Typical	1 A
Resistive loss	5.5 W
<b>Permitted ambient conditions</b>	
Ambient temperature	
• during operating	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• Comment	-
Relative humidity at 25 °C without condensation during operating maximum	95 %
Protection class IP	IP20
<b>Design, dimensions and weight</b>	
Module format	
Width	25 mm
Height	290 mm
Depth	210 mm
Net weight	0.65 kg
<b>Product properties, functions, components general</b>	
Number of modules	
• per CPU maximum	14
• note	-

Technical specifications (continued)		Ordering data	Order No.
<b>Order No.</b>	6GK7 443-5FX02-0XE0	<b>CP 443-5 Basic communications processor</b>	6GK7 443-5FX02-0XE0
<b>Product-type designation</b>	CP 443-5 Basic	Communications processor for connection of S7-400 to PROFIBUS, FMS, open communication, PG/OP and S7 communication; with electronic manual on CD-ROM	
<b>Performance data</b>		<b>PROFIBUS FastConnect bus connector RS485</b>	
<u>Performance data open communication</u>		With 90° cable outlet; insulation displacement technology, max. transmission rate 12 Mbit/s (1 unit)	
Number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	32	<ul style="list-style-type: none"> <li>Without PG interface</li> <li>With PG interface</li> </ul>	<b>6ES7 972-0BA52-0XA0</b> <b>6ES7 972-0BB52-0XA0</b>
Data volume as user data per connection for open communication by means of SEND/RECEIVE blocks maximum	240 byte	<b>PROFIBUS bus connector IP20</b>	
<u>Performance data FMS functions</u>		With connection to PPI, MPI, PROFIBUS	
Number of possible connections for FMS connection maximum	48	<ul style="list-style-type: none"> <li>Without PG interface</li> <li>With PG interface</li> </ul>	<b>6ES7 972-0BA12-0XA0</b> <b>6ES7 972-0BB12-0XA0</b>
Amount of data of the variables		<b>PROFIBUS bus terminal 12M</b>	
• for READ job maximum	237 byte	Bus terminal for connection of PROFIBUS nodes at up to 12 Mbit/s with connecting cable	6GK1 500-0AA10
• for WRITE job maximum	233 byte		
Number of variables			
• Configurable from server to FMS partner	512		
• Loadable from server to FMS partner	2 640		
<u>Performance data S7 communication</u>			
Number of possible connections for S7 communication			
• maximum	48		
• with PG connections maximum	-		
• with PG/OP connections maximum	-		
• note	-		
<u>Performance data multi-protocol mode</u>			
Number of possible connections of which 2 reserved for PG/OP communication for multi-protocol operation maximum	59		
<b>Product functions management, configuration</b>			
Configuration software required			

# SIMATIC S7-400

## Communication

### CP 443-5 Extended

#### Overview



DP-M	DP-S	FMS	PG/OP	S7/S5	
●			●	●	

- PROFIBUS DP master with electrical interface for connecting the SIMATIC S7-400 to PROFIBUS at up to 12 Mbit/s (including 45.45 Kbit/s)
- For setting up additional PROFIBUS DP lines
- Communication services:
  - PROFIBUS DP
  - PG/OP communication
  - S7 communication
  - Open communication (SEND/RECEIVE)
- Time synchronization
- Easy programming and configuration over PROFIBUS
- Cross-network programming device communication through S7 routing
- Can be easily integrated into the SIMATIC S7-400 system
- Module replacement without PG
- SIMATIC H system operation for redundant S7 communication or DP master communication
- Data record routing (PROFIBUS DP)
- Adding or modifying distributed I/O during operation

#### Technical specifications

Order No.	6GK7 443-5DX05-0XE0
Product-type designation	CP 443-5 Extended
<b>Transmission rate</b>	
Transmission rate at interface 1 in accordance with PROFIBUS	9.6 kbit/s ... 12 Mbit/s
<b>Interfaces</b>	
Number of electrical connections at interface 1 in accordance with PROFIBUS	1
Design of electrical connection at interface 1 in accordance with PROFIBUS	9-pin Sub-D socket (RS485)
<b>Supply voltage, current consumption, power loss</b>	
Type of voltage of supply voltage	DC
Supply voltage 1 from backplane bus	5 V
Relative symmetrical tolerance at 5 V with DC	5 %
Consumed current from backplane bus at 5 V for DC Typical	0.6 A
Resistive loss	5.5 W
<b>Permitted ambient conditions</b>	
Ambient temperature	0 ... 60 °C
• during operating	-40 ... +70 °C
• during storage	-40 ... +70 °C
• during transport	-
• Comment	-
Relative humidity at 25 °C without condensation during operating maximum	95 %
Protection class IP	IP20
<b>Design, dimensions and weight</b>	
Module format	
Width	25 mm
Height	290 mm
Depth	210 mm
Net weight	0.65 kg

Order No.	6GK7 443-5DX05-0XE0
Product-type designation	CP 443-5 Extended
<b>Product properties, functions, components general</b>	
Number of modules	14
• per CPU maximum	The number of CPs that can be operated as DP masters depends on the number of CP 443-1 Advanced processors operating in the S7-400 station as PROFINET IO controllers. Up to 10 CPs can be operated in total: up to 4 as PROFINET IO controllers (CP 443-1 Advanced); up to 10 as DP masters (CP 443-5 Extended)
• note	
<b>Performance data</b>	
<u>Performance data open communication</u>	
Number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	32
Data volume as user data per connection for open communication by means of SEND/RECEIVE blocks maximum	240 byte
<u>Performance data PROFIBUS DP</u>	
Service as DP master DPV1	Yes
Number of DP slaves on DP master usable	125
<b>Amount of data</b>	
• of the address area of the inputs as DP master overall	4 096 byte
• of the address area of the outputs as DP master overall	4 096 byte
• of the address area of the inputs per DP slave	244 byte
• of the address area of the outputs per DP slave	244 byte

### Technical specifications (continued)

Order No.	6GK7 443-5DX05-0XE0
Product-type designation	CP 443-5 Extended
<u>Performance data S7 communication</u>	
Number of possible connections for S7 communication	
• maximum	48
• with PG connections maximum	-
• with PG/OP connections maximum	-
• note	-
<u>Performance data multi-protocol mode</u>	
Number of active connections with multi-protocol mode	
• without DP maximum	59
• with DP maximum	54

Order No.	6GK7 443-5DX05-0XE0
Product-type designation	CP 443-5 Extended
<b>Product functions management, configuration</b>	
Configuration software required	STEP 7 V5.4 SP4 or higher, or STEP 7 V11.0 or higher

### Ordering data

#### CP 443-5 Extended communications processor

for connection of the SIMATIC S7-400 to PROFIBUS

Extended version for PROFIBUS DP; with electronic manual on CD-ROM

#### Order No.

**6GK7 443-5DX05-0XE0**

#### PROFIBUS FastConnect bus connector RS485

With 90° cable outlet; insulation displacement technology, max. transmission rate 12 Mbit/s (1 unit)

- Without PG interface
- With PG interface

**6ES7 972-0BA52-0XA0**  
**6ES7 972-0BB52-0XA0**

#### PROFIBUS bus connector IP20

With connection to PPI, MPI, PROFIBUS

- Without PG interface
- With PG interface

#### Order No.

**6ES7 972-0BA12-0XA0**  
**6ES7 972-0BB12-0XA0**

#### PROFIBUS bus terminal 12M

Bus terminal for connection of PROFIBUS nodes at up to 12 Mbit/s with connecting cable

**6GK1 500-0AA10**

# SIMATIC S7-400

## Communication

### CP 443-1

#### Overview



Communications processor for connecting a SIMATIC S7-400 to Industrial Ethernet networks, also as PROFINET IO controller or in SIMATIC H systems.

The CP supports:

- PG/OP communication
- S7 communication
- Open communication (SEND/RECEIVE)
- PROFINET communication
- IT communication

The communications processor can also be used for redundant S7 communication in SIMATIC H systems and for fail-safe applications (PROFIsafe) in connection with an S7-400 F-CPU.

ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●	●		●	●

6

#### Technical specifications

Order No.	6GK7 443-1EX30-0XE0
<b>Product-type designation</b>	<b>CP 443-1</b>
<b>Transmission rate</b>	
Transfer rate at the interface 1	10 ... 100 Mbit/s
<b>Interfaces</b>	
Number of electrical connections at interface 1 in accordance with Industrial Ethernet	2
Design of electrical connection at interface 1 in accordance with Industrial Ethernet	RJ45 port
<b>Supply voltage, current consumption, power loss</b>	
Type of voltage of supply voltage	DC
Supply voltage 1 from backplane bus	5 V
Relative symmetrical tolerance at 5 V with DC	5 %
Consumed current from backplane bus at 5 V for DC Typical	1.4 A
Resistive loss	8.6 W
<b>Permitted ambient conditions</b>	
Ambient temperature	
• during operating	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• Comment	-
Relative humidity at 25 °C without condensation during operating maximum	95 %
Protection class IP	IP20

Order No.	6GK7 443-1EX30-0XE0
<b>Product-type designation</b>	<b>CP 443-1</b>
<b>Design, dimensions and weight</b>	
Module format	
Width	25 mm
Height	290 mm
Depth	210 mm
Net weight	0.7 kg
<b>Product properties, functions, components general</b>	
Number of modules	
• per CPU maximum	14
• note	max. 4 as PN IO ctrl.
<b>Performance data</b>	
<u>Performance data</u>	
<u>open communication</u>	
Number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	64
Data volume	
• as user data per ISO connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per ISO on TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per UDP connection for open IE communication by means of SEND/RECEIVE blocks maximum	2 Kibyte
Number of possible connections for open communication by means of T blocks maximum	64



## Technical specifications (continued)

Order No.	6GK7 443-1EX30-0XE0
Product-type designation	CP 443-1
Data volume as user data per ISO on TCP connection for open communication by means of T blocks maximum	1 452 byte
Number of Multicast stations	-
<b>Performance data S7 communication</b>	
Number of possible connections for S7 communication	
• maximum	128
• with PG connections maximum	2
• with PG/OP connections maximum	-
• note	when using several CPUs
<b>Performance data multi-protocol mode</b>	
Number of active connections with multiprotocol mode	128
<b>Performance data PROFINET communication as PN IO-Controller</b>	
Product function PROFINET IO controller	Yes
Number of PN IO-Devices on PROFINET IO-Controller usable total	128
Number of PN IO IRT-Devices on PROFINET IO-Controller usable	64
Number of external PN IO lines with PROFINET per rack	4
<b>Data volume</b>	
• as useful data for input variables as PROFINET IO controller maximum	4 Kibyte
• as useful data for output variables with PROFINET IO controller maximum	4 Kibyte
• as useful data for input variables per PN IO device with PROFINET IO controller maximum	1 433 byte
• as useful data for output variables per PN IO device with PROFINET IO controller maximum	1 433 byte
• as user data for input variable per PN IO device per submodule as PROFINET IO controller maximum	240 byte
• as user data for output variables per PN IO device per submodule as PROFINET IO controller maximum	240 byte

Order No.	6GK7 443-1EX30-0XE0
Product-type designation	CP 443-1
<b>Product functions management, configuration</b>	
Product function MIB support	Yes
Protocol is supported	
• SNMP v1	Yes
• DCP	Yes
• LLDP	Yes
Configuration software required	STEP 7 V5.5 SP2 HF1 or higher, or STEP 7 V11.0
<b>Identification &amp; maintenance</b>	
• I&M0 - device-specific information	-
• I&M1 - plant identification/location name	-
<b>Product functions Diagnosis</b>	
Product function Web-based diagnostics	Yes
<b>Product functions switch</b>	
Product feature switch	Yes
<b>Product function</b>	
• switch-managed	No
• for IRT PROFINET IO switch	Yes
• Configuration with STEP 7	Yes
<b>Product functions Redundancy</b>	
<b>Product function</b>	
• Ring redundancy	Yes
• Redundancy manager	Yes
• MRP redundancy protocol	Yes
<b>Product functions Security</b>	
<b>Product function</b>	
• ACL - IP-based	Yes
• switchoff of non-required services	Yes
• blocking of communication via physical ports	Yes
• log file for unauthorized access	No
<b>Product functions Time</b>	
<b>Product function</b>	
• SICLOCK support	Yes
• pass on time synchronization	Yes
Protocol is supported NTP	Yes

## Ordering data

Order No.	Order No.
<b>CP 443-1 communications processor</b> For connecting SIMATIC S7-400 to Industrial Ethernet through TCP/IP, ISO and UDP; PROFINET IO Controller, MRP; integrated real-time switch ERTEC with two ports; 2 x RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with and without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection over IP access list, initialization over LAN 10/100 Mbit/s with electronic manual on DVD	<b>6GK7 443-1EX30-0XE0</b>
<b>SOFTNET S7 for Industrial Ethernet</b> Software for S7 and open communication, including OPC server, PG/OP communication and NCM PC, runtime software, software and electronic manual on CD-ROM, license key on a USB stick, Class A	<b>6GK1 704-1CW08-2AA0</b>
<b>SOFTNET-IE S7 V8.2</b> for 32/64-bit: Windows 7 Professional/Ultimate; for 64-bit: Windows 2008 Server R2; German/English up to 64 connections • Single License for one installation	<b>6GK1 704-1CW08-2AA0</b>

# SIMATIC S7-400

## Communication

CP 443-1

Ordering data	Order No.	Ordering data	Order No.
<b>SOFTNET-S7 Edition 2008 (V7.1) for Industrial Ethernet</b> For 32-bit Windows XP Professional SP2/3; Windows 2003 Server R2, SP2; Windows Vista Business/Ultimate SP1; Windows 2008 Server; German/English up to 64 connections • Single License for one installation <b>Software Update Service</b> For 1 year with automatic extension; requirement: current software version <b>Upgrade</b> • From Edition 2006 to Edition 2008 or V8.1 • From V6.0, V6.1, V6.2 or V6.3 to Edition 2008 or V8.1	<b>6GK1 704-1CW71-3AA0</b> <b>6GK1 704-1CW00-3AL0</b>  <b>6GK1 704-1CW00-3AE0</b> <b>6GK1 704-1CW00-3AE1</b>	<b>IE FC TP Standard Cable GP 2x2</b> 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet / IE FC RJ45 plug; PROFINET-compliant; with UL approval; <u>sold by the meter</u> max. length 1000 m, minimum order 20 m	<b>6XV1 840-2AH10</b>
<b>SOFTNET-IE S7 Lean Edition V8.2</b> Up to eight connections • Single License for one installation	<b>6GK1 704-1LW08-2AA0</b>	<b>Industrial Ethernet Switch SCALANCE X204-2</b> Industrial Ethernet switches with integral SNMP access, online diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; four 10/100 Mbit/s RJ45 ports and two fiber-optic cable ports	<b>6GK5 204-2BB10-2AA3</b>
<b>SOFTNET-S7 Lean Edition 2008 (V7.1) for Industrial Ethernet</b> Up to eight connections • Single License for one installation <b>Software Update Service</b> For 1 year with automatic extension; requirement: current software version <b>Upgrade</b> • From Edition 2006 to Edition 2008 or V8.1 • From V6.0, V6.1, V6.2 or V6.3 to Edition 2008 or V8.1	<b>6GK1 704-1LW71-3AA0</b> <b>6GK1 704-1LW00-3AL0</b>  <b>6GK1 704-1LW00-3AE0</b> <b>6GK1 704-1LW00-3AE1</b>	<b>IE FC RJ45 Plug 180 2x2</b> RJ45 plug connector for Industrial Ethernet with a rugged metal housing and integrated insulation-displacement/terminal contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units	<b>6GK1 901-1BB10-2AA0</b> <b>6GK1 901-1BB10-2AB0</b> <b>6GK1 901-1BB10-2AE0</b>
		<b>IE FC Stripping Tool</b> Preadjusted stripping tool for fast stripping of the Industrial Ethernet FC cables	<b>6GK1 901-1GA00</b>

6

### Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●	●	●	●	●

Communications processor for connecting a SIMATIC S7-400 to Industrial Ethernet networks, also as PROFINET IO controller or in SIMATIC H systems.

The CP supports:

- PG/OP communication
- S7 communication
- Open communication (SEND/RECEIVE)
- PROFINET communication
- IT communication
- Security functionality, firewall and VPN

The communications processor can also be used for redundant S7 communication in SIMATIC H systems and for fail-safe applications (PROFIsafe) in connection with an S7-400 F-CPU. In addition, the CP 443-1 Advanced provides e-mail functions and user-created Web pages, offering ideal support for maintenance and quality assurance. The Internet functions such as FTP even allow connection to the most diverse PC-based systems.

This CP is therefore the bridge between the field level and the management level for the S7-400. The CP 443-1 Advanced connects seamlessly to the security structures of the office and IT worlds.

### Technical specifications

Order No.	6GK7 443-1GX30-0XE0
Product-type designation	CP 443-1 Advanced
<b>Transmission rate</b>	
Transfer rate	
• at the interface 1	10 ... 1 000 Mbit/s
• at the interface 2	10 ... 100 Mbit/s
<b>Interfaces</b>	
Number of electrical connections	
• at interface 1 in accordance with Industrial Ethernet	1
• at interface 2 in accordance with Industrial Ethernet	4
Design of electrical connection	
• at interface 1 in accordance with Industrial Ethernet	RJ45 port
• at interface 2 in accordance with Industrial Ethernet	RJ45 port
design of the removable storage C-PLUG	Yes
<b>Supply voltage, current consumption, power loss</b>	
Type of voltage of supply voltage	DC
Supply voltage 1 from backplane bus	5 V
Relative symmetrical tolerance at 5 V with DC	5 %
Consumed current from backplane bus at 5 V for DC Typical	1.8 A
Resistive loss	7.25 W

Order No.	6GK7 443-1GX30-0XE0
Product-type designation	CP 443-1 Advanced
<b>Permitted ambient conditions</b>	
Ambient temperature	
• during operating	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• Comment	-
Relative humidity at 25 °C without condensation during operating maximum	95 %
Protection class IP	IP20
<b>Design, dimensions and weight</b>	
Module format	
Width	25 mm
Height	290 mm
Depth	210 mm
Net weight	0.7 kg
<b>Product properties, functions, components general</b>	
Number of modules	
• per CPU maximum	14
• note	max. 4 as PN IO ctrl.

# SIMATIC S7-400

## Communication

### CP 443-1 Advanced

#### Technical specifications (continued)

Order No.	6GK7 443-1GX30-0XE0
Product-type designation	CP 443-1 Advanced
<b>Performance data</b>	
<u>Performance data open communication</u>	
Number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	64
Data volume	
• as user data per ISO connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per ISO on TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per UDP connection for open IE communication by means of SEND/RECEIVE blocks maximum	2 Kibyte
Number of possible connections for open communication by means of T blocks maximum	64
Data volume as user data per ISO on TCP connection for open communication by means of T blocks maximum	1 452 byte
Number of Multicast stations	-
<u>Performance data S7 communication</u>	
Number of possible connections for S7 communication	
• maximum	128
• with PG connections maximum	2
• with PG/OP connections maximum	-
• note	when using several CPUs
<u>Performance data multi-protocol mode</u>	
Number of active connections with multiprotocol mode	128
<u>Performance data IT functions</u>	
Number of possible connections	
• as client by means of FTP maximum	20
• as server	
- by means of FTP maximum	10
- by means of HTTP maximum	4
• as e-mail client maximum	1
Amount of data as useful data for e-mail maximum	8 Kibyte
Storage capacity of user memory	
• as flash memory file system	30 Mibyte
• as RAM	16 Mibyte
• additionally buffered as RAM via central backup battery	512 Kibyte
Number of possible write cycles flash memory cells	100 000

Order No.	6GK7 443-1GX30-0XE0
Product-type designation	CP 443-1 Advanced
<b>Performance data</b>	
<u>PROFINET communication as PN IO-Controller</u>	
Product function PROFINET IO controller	Yes
Number of PN IO-Devices on PROFINET IO-Controller usable total	128
Number of PN IO IRT-Devices on PROFINET IO-Controller usable	64
Number of external PN IO lines with PROFINET per rack	4
Data volume	
• as useful data for input variables as PROFINET IO controller maximum	8 Kibyte
• as useful data for output variables with PROFINET IO controller maximum	8 Kibyte
• as useful data for input variables per PN IO device with PROFINET IO controller maximum	1 433 byte
• as useful data for output variables per PN IO device with PROFINET IO controller maximum	1 433 byte
• as user data for input variable per PN IO device per submodule as PROFINET IO controller maximum	240 byte
• as user data for output variables per PN IO device per submodule as PROFINET IO controller maximum	240 byte
<u>Performance data PROFINET CBA</u>	
Number of remote connection partners with PROFINET CBA	64
Number of connections with PROFINET CBA total	600
Amount of data	
• as useful data for digital inputs with PROFINET CBA maximum	8 Kibyte
• as useful data for digital outputs in the case of PROFINET CBA max.	8 Kibyte
• as useful data for arrays and data types	
- in the case of acyclic transmission with PROFINET CBA maximum	8 Kibyte
- in the case of cyclic transmission with PROFINET CBA maximum	250 byte
- in the case of local interconnection with PROFINET CBA maximum	2 400 byte
<u>Performance data PROFINET CBA remote connection with acyclic transmission</u>	
Updating time of the remote interconnections in the case of acyclic transmission with PROFINET CBA	0.1 s
Number of remote connections to input variables with acyclic transmission with PROFINET CBA maximum	150
Number of remote connections to output variables with acyclic transmission with PROFINET CBA maximum	150

## Technical specifications (continued)

Order No.	6GK7 443-1GX30-0XE0	Order No.	6GK7 443-1GX30-0XE0
Product-type designation	CP 443-1 Advanced	Product-type designation	CP 443-1 Advanced
Amount of data		<b>Product functions management, configuration</b>	
• as useful data for remote interconnections with input variables in the case of acyclic transmission with PROFINET CBA	8 Kibyte	Product function MIB support	Yes
• as useful data for remote interconnections with output variables in the case of acyclic transmission with PROFINET CBA	8 Kibyte	Protocol is supported	
		• SNMP v1	Yes
		• DCP	Yes
		• LLDP	Yes
<u>Performance data PROFINET CBA remote connection with cyclic transmission</u>		Configuration software	
Updating time of the remote interconnections in the case of acyclic transmission with PROFINET CBA	10 ms	• required	STEP 7 V5.5 SP2 HF1 or higher, or STEP 7 V11.0 or higher
Number of remote connections to input variables with cyclic transmission with PROFINET CBA maximum	250	• for PROFINET CBA required	SIMATIC iMap V3.0 SP1 and higher
Number of remote connections to output variables with cyclic transmission with PROFINET CBA maximum	250	Identification & maintenance	
		• I&M0 - device-specific information	-
		• I&M1 - plant identification/location name	-
		<b>Product functions Diagnosis</b>	
		Product function Web-based diagnostics	Yes
Amount of data		<b>Product functions switch</b>	
• as useful data for remote interconnections with input variables in the case of cyclic transmission with PROFINET CBA max.	2 000 byte	Product feature switch	Yes
• as useful data for remote interconnections with output variables in the case of cyclic transmission with PROFINET CBA maximum	2 000 byte	Product function	
		• switch-managed	No
		• for IRT PROFINET IO switch	Yes
		• Configuration with STEP 7	Yes
		<b>Product functions Redundancy</b>	
<u>Performance data PROFINET CBA HMI variables via PROFINET acyclic</u>		Product function	
Number of connectable HMI stations for HMI variables with acyclic transmission with PROFINET CBA	3	• Ring redundancy	Yes
Updating time of the HMI variables in the case of acyclic transmission with PROFINET CBA	500 ms	• Redundancy manager	Yes
Number of HMI variables with acyclic transmission with PROFINET CBA maximum	200	• MRP redundancy protocol	Yes
Amount of data as useful data for HMI variables in the case of acyclic transmission with PROFINET CBA maximum	8 Kibyte	<b>Product functions Security</b>	
		Design of the firewall	stateful inspection
<u>Performance data PROFINET CBA device-internal connections</u>		Product function with VPN connection	IPSec
Number of internal connections with PROFINET CBA maximum	300	Type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
Data volume of internal connections with PROFINET CBA maximum	2 400 byte	Type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
<u>Performance data PROFINET CBA connections to constants</u>		Type of hashing algorithms with VPN connection	MD5, SHA-1
Number of connections to constants with PROFINET CBA maximum	500	Number of possible connections for VPN connection	32
Amount of data as useful data for interconnections with constants in the case of PROFINET CBA maximum	4 000 byte	Product function	
		• password protection for Web applications	Yes
<u>Performance data PROFINET CBA PROFIBUS proxy functionality</u>		• ACL - IP-based	Yes
Product function with PROFINET CBA PROFIBUS proxy functionality	No	• ACL - IP-based for PLC/routing	Yes
		• switchoff of non-required services	Yes
		• blocking of communication via physical ports	Yes
		• log file for unauthorized access	No
		<b>Product functions Time</b>	
		Product function	
		• SICLOCK support	Yes
		• pass on time synchronization	Yes
		Protocol is supported NTP	Yes

# SIMATIC S7-400

## Communication

### CP 443-1 Advanced

#### Ordering data

#### Order No.

#### Order No.

#### CP 443-1 Advanced communications processor

For connecting the SIMATIC S7-400 CPU to Industrial Ethernet:  
1 x 10/100/1000 Mbit/s;  
4 x 10/100 Mbit/s (IE SWITCH);  
RJ45 ports; ISO; TCP; UDP;  
PROFINET IO controller,  
S7 communication; open  
communication (SEND/RECEIVE);  
S7 routing; IP configuration via  
DHCP/block; IP Access Control List;  
time synchronization; expanded  
web diagnostics; Fast Startup;  
PROFInergy support; IP routing;  
FTP; web server; e-mail;  
PROFINET CBA

- With security functionality (firewall and VPN)

6GK7 443-1GX30-0XE0

#### SOFTNET S7 for Industrial Ethernet

Software for S7 and open communication, including OPC server, PG/OP communication and NCM PC, runtime software, software and electronic manual on CD-ROM, license key on a USB stick, Class A

#### SOFTNET-IE S7 V8.2

For 32/64-bit  
Windows 7 Professional/Ultimate;  
For 64-bit:  
Windows 2008 Server R2;  
German/English

Up to 64 connections

- Single License for one installation

6GK1 704-1CW08-2AA0

#### SOFTNET-S7 Edition 2008 (V7.1) for Industrial Ethernet

For 32-bit Windows XP Professional SP2/3; Windows 2003 Server R2, SP2; Windows Vista Business/Ultimate SP1; Windows 2008 Server; German/English

Up to 64 connections

- Single License for one installation

6GK1 704-1CW71-3AA0

#### Software Update Service

For 1 year with automatic extension; requirement: current software version

6GK1 704-1CW00-3AL0

#### Upgrade

- From Edition 2006 to Edition 2008 or V8.1
- From V6.0, V6.1, V6.2 or V6.3 to Edition 2008 or V8.1

6GK1 704-1CW00-3AE0

6GK1 704-1CW00-3AE1

#### SOFTNET-IE S7 Lean Edition V8.2

Up to eight connections

- Single License for one installation

6GK1 704-1LW08-2AA0

#### SOFTNET-S7 Lean Edition 2008 (V7.1) for Industrial Ethernet

Up to eight connections

- Single License for one installation

6GK1 704-1LW71-3AA0

#### Software Update Service

For 1 year with automatic extension; requirement: current software version

6GK1 704-1LW00-3AL0

#### Upgrade

- From Edition 2006 to Edition 2008 or V8.1
- From V6.0, V6.1, V6.2 or V6.3 to Edition 2008 or V8.1

6GK1 704-1LW00-3AE0

6GK1 704-1LW00-3AE1

#### Accessories

#### IE FC TP Standard Cable GP 2x2 (type A)

4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold in meters, max. quantity 1000 m, minimum order 20 m

6XV1 840-2AH10

#### IE FC TP standard cable GP 4x2

8-core, shielded TP installation cable for connection to IE FC RJ45 Modular Outlet for universal application; with UL approval; sold by the meter, max quantity 1000 m, minimum order 20 m

- AWG22, for connection to IE FC RJ45 Modular Outlet
- AWG24, for connection to IE FC RJ45 Plug 4 x 2

6XV1 870-2E

6XV1 878-2A

#### IE FC RJ45 Plug 180 2x2

RJ45 plug connector for Industrial Ethernet with a rugged metal housing and integrated insulation-displacement/terminal contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1 901-1BB10-2AA0

6GK1 901-1BB10-2AB0

6GK1 901-1BB10-2AE0

#### IE FC RJ45 Plug 4 x 2

RJ45 plug connector for Industrial Ethernet (10/100/1000 Mbit/s) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1 901-1BB11-2AA0

6GK1 901-1BB11-2AB0

6GK1 901-1BB11-2AE0

Ordering data	Order No.	Order No.
<b>IE FC Stripping Tool</b> Preadjusted stripping tool for fast stripping of Industrial Ethernet FC cables	<b>6GK1 901-1GA00</b>	<b>SIMATIC iMap V3.0</b> for configuring PROFINET CBA,  Requirement: Windows 2000 Prof. with Service Pack 4 or later or Windows XP Prof. with Service Pack 1 or later or Windows 2003 Server with Service Pack 1 or later; on PG or PC with Pentium processor, min. 1 GHz; STEP 7 V5.3 or later with Service Pack 3, PN OPC Server V6.3 or later  Available in: German, English, with electronic documentation <ul style="list-style-type: none"> <li>• Single license</li> <li>• Software Update Service</li> <li>• Upgrade to V3.0, Single license</li> </ul>
<b>Industrial Ethernet Switch SCALANCE X204-2</b> with four 10/100 Mbit/s RJ45 ports and two fiber-optic cable ports	<b>6GK5 204-2BB10-2AA3</b>	
<b>Industrial Ethernet Switch SCALANCE X308-2</b> 2 x 1000 Mbit/s multimode fiber-optic cable ports (SC sockets), 1 x 10/100/1000 Mbit/s RJ45 port, 7 x 10/100 Mbit/s RJ45 ports; for glass fiber-optic cable (multimode) up to max. 750 m	<b>6GK5 308-2FL00-2AA3</b>	
		<b>6ES7 820-0CC04-0YA5</b> <b>6ES7 820-0CC01-0YX2</b> <b>6ES7 820-0CC04-0YE5</b>

# SIMATIC S7-400

## Communication

### SCALANCE M87x UMTS router

#### Overview



- UMTS, EGPRS (Edge GPRS) and GPRS router for wireless IP communication of Industrial Ethernet-based PLCs over UMTS/GSM mobile wireless networks
- High data transfer rate thanks to UMTS
- Integrated security functions with firewall
- *SCALANCE M875*:  
Use both as VPN server and as client (IPsec)

6

#### Technical specifications

Order No.	6GK5 873-0AA10-1AA2	6GK5 875-0AA10-1AA2
Product-type designation	SCALANCE M873	SCALANCE M875
<b>Transmission rate</b>		
Transfer rate		
• 1 for Industrial Ethernet	10 Mbit/s	10 Mbit/s
• 2 for Industrial Ethernet	100 Mbit/s	100 Mbit/s
• for GSM transmission	9 600 bit/s	9 600 bit/s
• with GPRS transmission		
- with downlink maximum	85.6 kbit/s	85.6 kbit/s
- with uplink maximum	85.6 kbit/s	42.8 kbit/s
• with eGPRS transmission		
- with downlink maximum	236.8 kbit/s	236.8 kbit/s
- with uplink maximum	236.8 kbit/s	118 kbit/s
• with UMTS transmission		
- with downlink maximum	3.6 Mbit/s	14.4 Mbit/s
- with uplink maximum	0.384 Mbit/s	5.76 Mbit/s
<b>Interfaces</b>		
Number of electrical connections		
• for network components and terminal equipment	1	2
• for external antenna(s)	1	2
• for power supply	1	1
Design of electrical connection		
• for network components and terminal equipment		
• for external antenna(s)	SMA antenna socket (50 ohms)	SMA antenna socket (50 ohms)
• for power supply	Terminal block	Terminal block
<b>Inputs/outputs</b>		
Number of electrical connections		
• for digital input signals	1	1
• for digital output signals	1	1
Design of electrical connection		
• for digital input signals	Terminal block	Terminal block
• for digital output signals	Terminal block	Terminal block



#### Technical specifications (continued)

Order No.	6GK5 873-0AA10-1AA2	6GK5 875-0AA10-1AA2
Product-type designation	SCALANCE M873	SCALANCE M875
<b>WAN connection</b>		
Type of mobile wireless network is supported GSM	Yes	Yes
Type of mobile wireless service is supported		
• GPRS	Yes	Yes
• eGPRS	Yes	Yes
Type of mobile wireless network is supported UMTS	Yes	Yes
Type of mobile wireless service is supported		
• HSDPA	Yes	Yes
• HSUPA	No	Yes
<b>Operating frequency</b>		
• for GSM transmission		
- 850 MHz	Yes	Yes
- 900 MHz	Yes	Yes
- 1800 MHz	Yes	Yes
- 1900 MHz	Yes	Yes
• for UMTS transmission		
- 800 MHz	No	Yes
- 850 MHz	Yes	Yes
- 900 MHz	No	No
- 1700 MHz	No	Yes
- 1900 MHz	Yes	Yes
- 2100 MHz	Yes	Yes
Type of GPRS time slot method Multislot Class 10	-	-
<b>Supply voltage, current consumption, power loss</b>		
Type of voltage of supply voltage	DC	DC
Supply voltage	24 V	24 V
• minimum	12 V	12 V
• maximum	30 V	30 V
Consumed current maximum	450 mA	450 mA
Active power loss typical	4 W	4 W
<b>Permitted ambient conditions</b>		
Ambient temperature		
• during operating	-20 ... +60 °C	-40 ... +75 °C
• during storage	-40 ... +70 °C	-40 ... +85 °C
Relative humidity at 25 °C during operating maximum	95 %	95 %
Protection class IP	IP20	IP20
<b>Design, dimensions and weight</b>		
Design	compact	compact
Depth	114 mm	114 mm
Height	99 mm	99 mm
Width	45 mm	45 mm
Net weight	280 g	280 g
Type of mounting 35 mm DIN rail mounting	-	-
Type of mounting	-	-

# SIMATIC S7-400

## Communication

### SCALANCE M87x UMTS router

#### Technical specifications (continued)

Order No.	6GK5 873-0AA10-1AA2	6GK5 875-0AA10-1AA2
Product-type designation	SCALANCE M873	SCALANCE M875
<b>Product properties, functions, components general</b>		
Product function DynDNS client	Yes	Yes
<b>Product functions management, configuration</b>		
Product function		
• CLI	No	No
• web-based management	Yes	Yes
• MIB support	No	No
• TRAPs via email	No	No
Protocol is supported		
• Telnet	No	No
• HTTP	No	No
• HTTPS	Yes	Yes
Type of configuration	Web interface	Web interface
<b>Product functions Diagnosis</b>		
Product function		
• Statistics Packet Size	No	No
• Statistics packet type	No	No
• Error statistics	No	No
• SysLog	Yes	Yes
• Packet Filter Log	Yes	Yes
<b>Product functions DHCP</b>		
Product function		
• DHCP client	Yes	Yes
• DHCP server - internal network	Yes	Yes
<b>Product functions Routing</b>		
Router function		
• NAT (IP masquerading)	Yes	Yes
• Port Forwarding	Yes	Yes
• NAT traversal	Yes	Yes
• 1:1 NAT	Yes	Yes
• DNS cache	Yes	Yes
<b>Product functions Security</b>		
Design of the firewall		
Product function		
• Password protection	Yes	Yes
• packet filter	Yes	Yes
• Broadcast/Multicast/Unicast Limiter	-	-
• broadcast blocking	-	-
Suitability for installation Virtual Private Network	No	Yes
Product function with VPN connection	F	T
Number of possible connections for VPN connection	-	10
Number of network stations for internal network with VPN connection maximum	-	-
Type of authentication with Virtual Private Network PSK	No	Yes
Protocol will be supported IPsec tunnel and transport mode	No	Yes

#### Technical specifications (continued)

Order No.	6GK5 873-0AA10-1AA2	6GK5 875-0AA10-1AA2
Product-type designation	SCALANCE M873	SCALANCE M875
Key length		
• with IPsec DES with Virtual Private Network	-	56 bit
• 1 with IPsec AES with Virtual Private Network	-	128 bit
• 2 with IPsec AES with Virtual Private Network	-	192 bit
• 3 with IPsec AES with Virtual Private Network	-	256 bit
Type of Internet key exchange with Virtual Private Network main mode	No	Yes
Key length with IPsec 3DES with Virtual Private Network	-	168 bit
Type of Internet key exchange with Virtual Private Network quick mode	No	Yes
Type of packet authentication with Virtual Private Network	-	
IETF profile with Virtual Private Network X.509v3 certificate	No	Yes
<b>Product functions Time</b>		
Router function NTP	Yes	Yes
<b>Standards, specifications, approvals</b>		
Standard		
• for EMC	-	-
• for EMC from FM	-	-
• for hazardous zone	-	-
• for safety of CSA and UL	-	-
• for hazardous area of CSA and UL	-	-
• for emitted interference	EN55022 Class A	EN55022 Class A
• for interference immunity	EN 61000-6-2	EN 61000-6-2
Verification of suitability	EN 61000-6-2	EN 61000-6-2
• CE mark	Yes	Yes
• C-Tick	-	-
• E1 approval	Yes	Yes
• e1 approval	Yes	Yes
• Railway application in accordance with EN 50155	No	Yes

# SIMATIC S7-400

## Communication

### SCALANCE M87x UMTS router

#### Ordering data

#### Order No.

#### Order No.

#### SCALANCE M 87x UMTS router

UMTS router for wireless IP communication between Industrial Ethernet-based programmable controllers via UMTS/GSM mobile radio networks; EGPRS Multislot Class 12

- **SCALANCE M873<sup>1)</sup>**  
with integral firewall;  
1 x RJ45 port, 1 x antenna connection
- **SCALANCE M875<sup>1)</sup>**  
with integral firewall and VPN with IPsec;  
2 x RJ45 ports, 2 x antenna connections

**6GK5 873-0AA10-1AA2**

**6GK5 875-0AA10-1AA2**

#### Accessories

#### IE FC RJ45 Plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPU's with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**6GK1 901-1BB10-2AA0**

**6GK1 901-1BB10-2AB0**

**6GK1 901-1BB10-2AE0**

#### ANT794-4MR antenna

Omnidirectional antenna for GSM (2G) and UMTS (3G) networks; weather-resistant for indoor and outdoor use; 5 m cable with fixed connection to antenna; SMA connector; including mounting bracket, screws, wall plugs

**6NH9 860-1AA00**

#### SCALANCE S Industrial Security Modules

For protection of programmable controllers and automation networks, and for safeguarding of industrial communication; configuring tool and electronic manual on CD-ROM; German, English, French, Italian, Spanish

- **SCALANCE S612**  
uses the stateful inspection firewall to protect network segments against unauthorized access; protects up to 32 devices up to 64 VPN tunnels simultaneously
- **SCALANCE S623<sup>2)</sup>**  
uses the stateful inspection firewall to protect network segments against unauthorized access; protects up to 64 devices and up to 128 VPN tunnels simultaneously; enhanced temperature range (-20 to +70 °C)

**6GK5 612-0BA10-2AA3**

**6GK5 623-0BA10-2AA3**

#### CP 343-1 Advanced

For connecting the SIMATIC S7-300 CPU to Industrial Ethernet; 1 x 10/100/1000 Mbit/s; 2 x 10/100 Mbit/s (IE switch); RJ45 ports; TCP; UDP; ISO; PROFINET IO-Controller and Device, S7 communication (client + server); open communication (SEND/RECEIVE); S7 routing; IP configuration via DHCP/block; extended Web diagnostics; time synchronization; IP Access Control List; IP routing; FTP; e-mail; PROFINET CBA; C-Plug; mit Security (Firewall + VPN) und PROFInergy (Controller + Device)

**6GK7 343-1GX31-0XE0**

#### CP 443-1 Advanced

for connecting the SIMATIC S7-400 CPU to Industrial Ethernet; 1 x 10/100/1000 Mbit/s; 4 x 10/100 Mbit/s (IE SWITCH); RJ45 ports; ISO; TCP; UDP; PROFINET IO controller, S7 communication; open communication (SEND/RECEIVE); S7 routing; IP configuration via DHCP/block; IP Access Control List; time synchronization; expanded Web diagnostics; Fast Startup; PROFInergy support; IP routing; FTP; Web server; e-mail; PROFINET CBA; mit Security (Firewall/VPN)

**6GK7 443-1GX30-0XE0**

#### IE TP Cord RJ45/RJ45

TP cable 4 x 2 with 2 RJ45 connectors

- 0.5 m
- 1 m
- 2 m
- 6 m
- 10 m

**6XV1 870-3QE50**

**6XV1 870-3QH10**

**6XV1 870-3QH20**

**6XV1 870-3QH60**

**6XV1 870-3QN10**

<sup>1)</sup> Please note national approvals under [www.siemens.com/wireless-approvals](http://www.siemens.com/wireless-approvals)

### Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●	●		●	●

- Connection of SIMATIC S7-400 to Industrial Ethernet
  - 2 x RJ45 interface for 10/100 Mbit/s full/half-duplex connection with auto-sensing/auto-negotiation and auto-crossover function
  - Integrated real-time switch ERTEC with two ports
  - Multi-protocol operation for ISO, TCP/IP, UDP and PROFINET IO protocols
  - Adjustable Keep Alive function
- Communication services:
  - Open communication (ISO, TCP/IP, and UDP)
  - PROFINET IO Controller with real-time properties RT and IRT
  - PG/OP communication: Cross-network by means of S7 routing
  - S7 communication
- Media redundancy (MRP); the CP supports the media redundancy procedure MRP within an Ethernet network with ring topology.
- Multicast for UDP
- Access protection via configurable access list
- Support for fail-safe programmable controllers together with SIMATIC S7-400 CPU 416F-3PN/DP
- Module replacement without PG
- Operation in the SIMATIC H system for redundant S7-communication
- Configuration with STEP 7
- Diagnostics possibilities in STEP 7 and via web browser
- Automatic CPU-clock setting via Industrial Ethernet with NTP or SIMATIC procedure
- Integration of network management systems via SNMP (MIB II diagnostic information)

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS CP 443-1

<b>Order No.</b>	<b>6AG1 443-1EX20-4XE0</b>
<b>Order number based on</b>	<b>6GK7 443-1EX20-0XE0</b>
Ambient temperature range	0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies, except for the ambient conditions
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold spores, fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see: [www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

#### Ordering data

##### SIPLUS CP 443-1 communications processor

(medial exposure)

For connecting SIMATIC S7-400 to Industrial Ethernet through TCP/IP, ISO and UDP; PROFINET IO Controller, MRP; integrated real-time switch ERTEC with two ports; 2 x RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with and without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection over IP access list, initialization over LAN 10/100 Mbit/s with electronic manual on DVD

#### Accessories

#### Order No.

**6AG1 443-1EX20-4XE0**

See SIMATIC CP 443-1, page 6/113

# SIMATIC S7-400

## SIPLUS communication

### SIPLUS CP 443-1 Advanced

#### Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●	●	●	●	●

- Connection of SIMATIC S7-400 to Industrial Ethernet
  - Multi-protocol operation for ISO, TCP/IP, UDP and PROFINET IO protocols
  - Adjustable keep-alive function
- Two separate interfaces (integrated network separation):
  - Gigabit interface with one RJ45 port with 10/100/1 000 Mbit/s, full/half-duplex with auto-sensing capability
  - PROFINET interface with four RJ45 ports with 10/100 Mbit/s, full/half duplex with autosensing and autocrossover functionality via integrated 4-port switch
- Communication services via both interfaces
  - Open communication (ISO, TCP/IP and UDP), multicast with UDP, including routing between both interfaces
  - PG/OP communication:
    - Cross-network by means of S7 routing
  - S7 communication (client, server, multiplexing) including routing between both interfaces
  - IT communication:
    - HTTP communication supports access to process data via own Web pages;
    - e-mail client function, sending of e-mails with authentication directly from user program;
    - FTP communication supports program-controlled FTP client communication;
    - access to data blocks through FTP server
- Communication services via PROFINET interface
  - PROFINET IO controller with real-time properties (RT and IRT)
  - PROFINET CBA
  - IP address assignment via DHCP, simple PC tool or via the user program (e.g. HMI)
  - Support of the prioritized startup of PROFINET IO devices
  - Configuration with STEP 7
- Media redundancy (MRP); the CP supports the media redundancy procedure MRP within an Ethernet network with ring topology.
- Access protection by means of configurable IP access list
- Module replacement without programming device; all information is stored on the C-PLUG (also file system for IT functions)

- Extensive diagnostic functions for all modules in the rack
- Integration into network management systems through the support of SNMP V1 MIB-II
- Operation in the SIMATIC H system for redundant S7-communication
- Operation in fail-safe applications (PROFIsafe) in combination with SIMATIC S7-400 CPU 416F

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

SIPLUS CP 443-1 Advanced	
Order No.	6AG1 443-1GX20-4XE0
Order number based on	6GK7 443-1GX20-0XE0
Ambient temperature range	0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies, except for the ambient conditions

#### Ambient conditions

Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.	Accessories	Order No.
<p><b>SIPLUS CP 443-1 Advanced communications processor</b></p> <p>(medial exposure)</p> <p>For the connection of SIMATIC S7-400 to Industrial Ethernet; PROFINET IO Controller with RT and IRT, MRP, PROFINET CBA, TCP/IP, ISO and UDP; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with and without RFC 1006, diagnostic expansions, multicast, clock synchronization via SIMATIC procedure or NTP; access protection via IP access list, FTP client/server, HTTP server, HTML diagnostics, SNMP, DHCP, e-mail, data storage on C-PLUG;</p> <p>PROFINET interface: 4 x RJ45 (10/100 Mbit/s) over switch; Gigabit interface: 1 x RJ45 (10/100/1000 Mbit/s); with electronic manual on DVD</p> <ul style="list-style-type: none"> <li>• For use with SIMATIC S7-400 CPU, V5.2 and higher</li> </ul>	<p><b>6AG1 443-1GX20-4XE0</b></p>	<p>See SIMATIC CP 443-1 Advanced, page 6/118</p>	

# SIMATIC S7-400

## Connection methods

### Front connectors

#### Overview



- For simple and user-friendly connection of sensors and actuators
- For retaining the wiring when replacing modules
- With coding to avoid mistakes when replacing modules

#### Ordering data

#### Order No.

##### Front connectors

48-pin for signal modules, function modules; 1 unit

- With screw contacts
- With spring-loaded terminals
- With crimp contacts

**6ES7 492-1AL00-0AA0**

**6ES7 492-1BL00-0AA0**

**6ES7 492-1CL00-0AA0**

48-pin for signal modules, function modules; 84 units per pack

- With screw contacts
- With crimp contacts

**6ES7 492-1AL00-1AB0**

**6ES7 492-1CL00-1AB0**

for 6ES7 431-7KF00-0AB0; spare part, included in scope of delivery; 1 piece

**6ES7 431-7KF00-6AA0**

##### Crimp contacts

250 units

**6XX3 070**

##### Crimping tool

for crimping the contacts

**6XX3 071**

##### Front cover for front connector

6 units

**6ES7 492-2XL00-0AA0**

##### Connection terminal for modules

6 units

**6ES7 490-1BA00-0AA0**

##### SIMATIC Manual Collection

Electronic manuals on DVD, multilingual: LOGO!, SIMADYN, SIMATIC bus components, SIMATIC C7, SIMATIC distributed I/O, SIMATIC HMI, SIMATIC Sensors, SIMATIC NET, SIMATIC PC Based Automation, SIMATIC PCS 7, SIMATIC PG/PC, SIMATIC S7, SIMATIC Software, SIMATIC TDC

**6ES7 998-8XC01-8YE0**

##### SIMATIC Manual Collection update service for 1 year

Current "Manual Collection" DVD and the three subsequent updates

**6ES7 998-8XC01-8YE2**



#### Overview

Wiring of SIMATIC S7 I/O modules with the sensors/actuators is a significant factor with respect to time/cost overhead, configuring, control cabinet installation, procurement and ease of service.

With SIMATIC TOP connect system cabling, it is simple and quick to establish a reliable connection for your SIMATIC S7-300/400.

With the TIA Selection Tool, a mouse click is all that is required to configure the connection from the SIMATIC S7 module to the I/O. The program automatically checks for plausibility and generates a parts list for the selected connection components that can then be ordered in the Industry Mall.

Further information can be found on the Internet at

[www.siemens.com/tia-selection-tool](http://www.siemens.com/tia-selection-tool)

#### Design

The flexible connection lets you quickly connect sensors and actuators inside the control cabinet with the SIMATIC S7-400.

The flexible connection consists of:

- Front connector with screw-type or crimp connection
- Front connector with fixed single cores
- Single cores also available with UL/CSA-certified cores

The blue wires are numbered sequentially and can be routed direct to each element in the control cabinet. The numbering of the single cores corresponds to the coding of the front connector contacts.

In comparison to conventional single wiring, there is a cost saving of 50% for assembly, since the single cores that have already been checked on the connector are fixed.

Thus no complex pre-assembly of up to two times 46 single cores per module is necessary.

# SIMATIC S7-400

## Connection methods

### Flexible connection

#### Overview



The flexible connection guarantees a fast and direct connection from the input/output modules of the SIMATIC S7-300/400 to the individual elements in the cabinet.

Already attached single cores reduce the wiring effort.

The core cross-sections of 0,5 mm<sup>2</sup> also allow higher currents.

#### Technical specifications

Front connector with single cores	
Rated operating voltage	24 V DC
Max. permissible continuous current with simultaneous load on all cores	1.0 A
Permissible ambient temperature	0 to +60 C
Core type	H05V-K or with UL style 1007/1569 CSA TR64
Number of cores	46
Core cross-section	0.5 mm <sup>2</sup> , Cu
Bundle diameter in mm	approx. 17
Core color	Blue, RAL 5010
Designation of cores	Numbered 3 to 48 (adapter contact = core number)
Assembly	Screw-type or crimp contacts

#### Ordering data

#### Order No.

##### Front connector with single cores for 32-channel module SIMATIC S7-400, 46 x 0.5 mm<sup>2</sup>

##### Core type H05V-K

##### Screw connection

Packaging unit: 1 unit

Length:

- 2.5 m
- 3.2 m
- 5 m
- Custom lengths

**6ES7 922-4BC50-0AD0**  
**6ES7 922-4BD20-0AD0**  
**6ES7 922-4BF00-0AD0**  
 on request

Packaging unit: 5 units

Length:

- 2.5 m
- 3.2 m
- 5 m

**6ES7 922-4BC50-5AD0**  
**6ES7 922-4BD20-5AD0**  
**6ES7 922-4BF00-5AD0**

##### Crimp connection

Packaging unit: 1 unit

Length:

- 2.5 m
- 3.2 m
- 5 m
- Custom lengths

**6ES7 922-4BC50-0AE0**  
**6ES7 922-4BD20-0AE0**  
**6ES7 922-4BF00-0AE0**  
 on request

Packaging unit: 5 units

Length:

- 2.5 m
- 3.2 m
- 5 m

**6ES7 922-4BC50-5AE0**  
**6ES7 922-4BD20-5AE0**  
**6ES7 922-4BF00-5AE0**

##### Core type UL/CSA-certified

##### Screw-type version

Packaging unit: 1 unit

- 3.2 m
- 5 m
- Custom lengths

**6ES7 922-4BD20-0UD0**  
**6ES7 922-4BF00-0UD0**  
 on request

## Overview



- The basic mechanical framework of the SIMATIC S7-400/S7-400H
- For accommodating the modules, supplying them with operating voltage and connecting them via the backplane bus
- Several versions for configuring central controllers and expansion racks

**UR1 (Universal Rack)**

- For setting up central controllers and expansion units
- For holding up to 18 modules
- Also suitable for S7-400H
- Also available as aluminum rack

**UR2 (Universal Rack)**

- For setting up central controllers and expansion units
- For holding up to 9 modules
- Also suitable for S7-400H.
- Also available as aluminum rack

**CR2 (Central Rack)**

- For setting up central controllers
- For holding up to 18 modules
- Segmented rack:  
For operating two mutually independent S7-400 CPUs without S7-400 Multicomputing, but with communication between the CPUs over the backplane bus (C bus). Both CPUs can address their own local I/O modules (segmented P bus).

**CR3 (Central Rack)**

- For configuring central racks
- Optimized for distributed automation solutions due to holding up to 4 modules

**UR2-H**

- For configuring a complete S7-400H system in one subrack
- Also suitable for S7-400:  
Operation of 2 separate CPUs with their own I/O (separate P and C buses)
- Can also be used as an expansion unit
- For holding up to 18 modules
- Also available as aluminum rack

**ER1 (Extension Rack)**

- For setting up expansion units economically
- For holding up to 18 modules with restricted functionality
- Also suitable for S7-400H
- Also available as aluminum rack

**ER2 (Extension Rack)**

- For setting up expansion units economically
- For holding up to 9 modules with restricted functionality
- Also suitable for S7-400H
- Also available as aluminum rack

## Technical specifications

	6ES7 400-1TA01-0AA0	6ES7 400-1TA11-0AA0	6ES7 400-1JA01-0AA0	6ES7 400-1JA11-0AA0	6ES7 401-2TA01-0AA0	6ES7 401-1DA01-0AA0
<b>Hardware configuration</b>						
Number of single-width slots, max.	18	18	9	9	18; 2 segments with 8 or 10 slots	4
<b>Rack</b>						
• Communication bus	Yes	Yes	Yes	Yes	Yes	Yes
• P bus	Yes	Yes	Yes	Yes	Yes	Yes
<b>Dimensions</b>						
Width	482.5 mm	482.5 mm	257.5 mm	257.5 mm	482.5 mm	130 mm
Height	290 mm	290 mm	290 mm	290 mm	290 mm	290 mm
Depth	27.5 mm	27.5 mm	27.5 mm	27.5 mm	27.5 mm	27.5 mm
<b>Weight</b>						
Weight, approx.	4 200 g	3 000 g	2 200 g	1 500 g	4 200 g	750 g

## SIMATIC S7-400

## Racks

## Racks

## Technical specifications (continued)

	6ES7 400-2JA00-0AA0	6ES7 400-2JA10-0AA0	6ES7 403-1TA01-0AA0	6ES7 403-1TA11-0AA0	6ES7 403-1JA01-0AA0	6ES7 403-1JA11-0AA0
<b>Hardware configuration</b>						
Number of single-width slots, max.	18	18	18	18	9	9
Rack						
• Communication bus	Yes	Yes				
• P bus	Yes	Yes	Yes	Yes	Yes	Yes
<b>Dimensions</b>						
Width	482.5 mm	482.5 mm	482.5 mm	482.5 mm	257.5 mm	257.5 mm
Height	290 mm	290 mm	290 mm	290 mm	290 mm	290 mm
Depth	27.5 mm	27.5 mm	27.5 mm	27.5 mm	27.5 mm	27.5 mm
<b>Weight</b>						
Weight, approx.	4 200 g	3 000 g	4 200 g	2 500 g	2 200 g	1 250 g

## Ordering data


## Order No.

## Order No.

<b>UR1 rack</b> for central controllers and expansion units, 18 slots	<b>6ES7 400-1TA01-0AA0</b>	<b>UR2-H rack</b> for split CCs, 18 slots	<b>6ES7 400-2JA00-0AA0</b>
<b>UR1 aluminum rack</b> for central controllers and expansion units, 18 slots	<b>6ES7 400-1TA11-0AA0</b>	<b>UR2-H aluminum rack</b> for split CCs, 18 slots	<b>6ES7 400-2JA10-0AA0</b>
<b>UR2 rack</b> for central controllers and expansion units, 9 slots	<b>6ES7 400-1JA01-0AA0</b>	<b>ER1 rack</b> for expansion units, P bus only, 18 slots	<b>6ES7 403-1TA01-0AA0</b>
<b>UR2 aluminum rack</b> for central controllers and expansion units, 9 slots	<b>6ES7 400-1JA11-0AA0</b>	<b>ER1 aluminum rack</b> for expansion units, P bus only, 18 slots	<b>6ES7 403-1TA11-0AA0</b>
<b>CR2 rack</b> for segmented central controllers, 18 slots, 2 local segments	<b>6ES7 401-2TA01-0AA0</b>	<b>ER2 rack</b> for expansion units, P bus only, 9 slots	<b>6ES7 403-1JA01-0AA0</b>
<b>CR3 rack</b> for central controllers and expansion units, 4 slots; optimized for distributed automation solutions	<b>6ES7 401-1DA01-0AA0</b>	<b>ER2 aluminum rack</b> for expansion units, P bus only, 9 slots	<b>6ES7 403-1JA11-0AA0</b>
		<b>Slot cover</b> 10 units (spare part)	<b>6ES7 490-1AA00-0AA0</b>

6

#### Overview

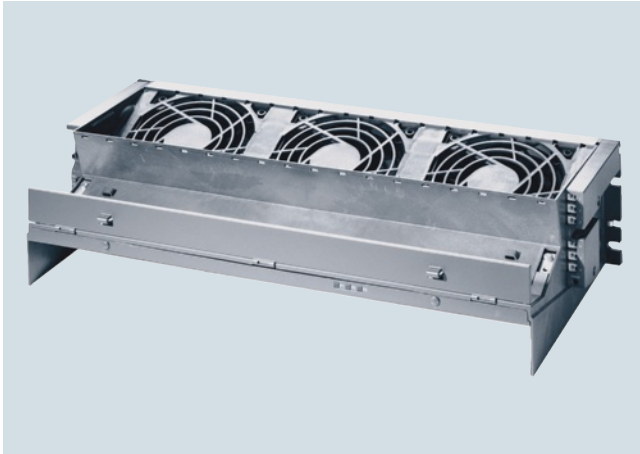

- Fans for the SIMATIC S7-400
- Necessary when using modules that generate an extremely large amount of heat

#### Technical specifications

	6ES7 408-1TA01-0XA0	6ES7 408-1TB00-0XA0
<b>Supply voltage</b>		
24 V DC	Yes	
permissible range, lower limit (DC)	19.2 V	
permissible range, upper limit (DC)	30 V	
120 V AC		Yes
230 V AC		Yes
Line frequency		
• Frequency of the supply voltage		63 Hz
<b>Input current</b>		
Inrush current, typ.	0.9 A; at 24 V	0.6 A at rated voltage 230 VAC; 1.15 A at rated voltage 120 VAC
<b>Power losses</b>		
Power loss, max.	11 W	20 W
<b>Digital outputs</b>		
Relay outputs		
• Rated input voltage of relay coil L+ (DC)	24 V	24 V
• Switching capacity of contacts - Switching frequency/contacts/at ohmic load/maximum	200 mA	200 mA
<b>Dimensions</b>		
Width	482.5 mm	482.5 mm
Height	109.5 mm	109.5 mm
Depth	235 mm	235 mm
<b>Weight</b>		
Weight, approx.	1.6 kg	2 kg

#### Ordering data

##### Fan subassembly

for all racks;  
Supply voltage

24 V DC  
120 / 230 V AC

##### Dust filter

10 pieces

#### Order No.

**6ES7 408-1TA01-0XA0**

**6ES7 408-1TB00-0XA0**

**6ES7 408-1TA00-7AA0**

##### Replacement fan

Spare part

##### Cable duct

Same design as fan subassembly,  
but without fans or electronic units

#### Order No.

**6ES7 408-1TA00-6AA0**


**6ES7 408-0TA00-0AA0**

# SIMATIC S7-400

## SIPLUS racks

### SIPLUS racks

#### Overview

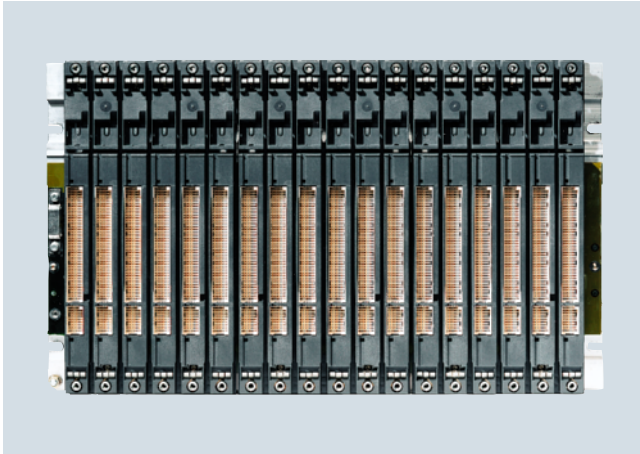

- The mechanical basic structure of SIPLUS S7-400/S7-400H
- For accommodating the modules, operating voltage supply, and connection of the modules via a backplane bus
- Several versions for setting up central controllers and expansion units
- SIPLUS rack material: Aluminum

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

6

SIPLUS S7-400 rack	6AG1 400-1JA11-7AA0	6AG1 400-1TA11-7AA0	6AG1 400-2JA10-4AA0	6AG1 400-2JA10-7AA0
Order No.	6AG1 400-1JA11-7AA0	6AG1 400-1TA11-7AA0	6AG1 400-2JA10-4AA0	6AG1 400-2JA10-7AA0
Order No. based on	6ES7 400-1JA11-0AA0	6ES7 400-1TA11-0AA0	6ES7 400-2JA10-0AA0	6ES7 400-2JA10-0AA0
Ambient temperature range	-25 ... +70 °C	-25 ... +70 °C	0 ... +60 °C	-25 ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components			
Technical data	The technical data of the standard product applies, except for the ambient conditions			
<b>Ambient conditions</b>				
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.			
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!			
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!			
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!			
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K			

For further technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

Ordering data	Order No.	Order No.
<b>SIPLUS S7-400 rack</b> (extended temperature range and medial exposure)		
<b>Ambient temperature range</b> -25 ... +70 °C		<b>Ambient temperature range</b> 0 ... +60 °C
<b>UR1 aluminum rack</b> for central controllers and expansion units, 18 slots	<b>6AG1 400-1TA11-7AA0</b>	<b>UR2-H aluminum rack</b> for central controllers and expansion units, 9 slots
<b>UR2 aluminum rack</b> for central controllers and expansion units, 9 slots	<b>6AG1 400-1JA11-7AA0</b>	<b>6AG1 400-2JA10-4AA0</b>
<b>UR2-H aluminum rack</b> for central controllers and expansion units, 9 slots	<b>6AG1 400-2JA10-7AA0</b>	<b>Accessories</b> See SIMATIC rack S7-400, page 6/132

### Overview



- Send interface module for central expansion to 5 m
- Transmission of P and K bus
- Can be plugged into the central controller
- Up to 8 expansion racks can be connected (up to 4 per interface)
- Can be used exclusively with IM 461-0

### Technical specifications

6ES7 460-0AA01-0AB0	
<b>Input current</b>	
from backplane bus 5 V DC, max.	140 mA
<b>Power losses</b>	
Power loss, max.	700 mW
<b>Hardware configuration</b>	
Cable length between first and last interface module, max.	5 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b>	
Weight, approx.	600 g

### Ordering data

Ordering data	Order No.
<b>IM 460-0 interface module</b>	<b>6ES7 460-0AA01-0AB0</b>
Send interface module for central connection up to 5 m; with C bus transmission	
<b>468-1 connecting cable</b>	
between IM 460-0 and IM 461-0; IM 460-3 and IM 461-3	
0.75 m	<b>6ES7 468-1AH50-0AA0</b>
1.5 m	<b>6ES7 468-1BB50-0AA0</b>
5 m	<b>6ES7 468-1BF00-0AA0</b>

# SIMATIC S7-400

## Interface modules

### IM 461-0

#### Overview



- Receive interface for centralized expansion up to 5 m
- Transmission of P and K bus
- Can be plugged into expansion rack
- To be used exclusively with IM 460-0

#### Technical specifications

6ES7 461-0AA01-0AA0	
<b>Input current</b>	
from backplane bus 5 V DC, max.	290 mA
<b>Power losses</b>	
Power loss, max.	1 450 mW
<b>Hardware configuration</b>	
Cable length between first and last interface module, max.	5 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b>	
Weight, approx.	610 g

#### Ordering data

Ordering data	Order No.
<b>IM 461-0 interface module</b>	<b>6ES7 461-0AA01-0AA0</b>
Receive interface module for central connection up to 5 m; with C bus transmission	
<b>468-1 connecting cable</b>	
between IM 460-0 and IM 461-0; IM 460-3 and IM 461-3	
0.75 m	<b>6ES7 468-1AH50-0AA0</b>
1.5 m	<b>6ES7 468-1BB50-0AA0</b>
5 m	<b>6ES7 468-1BF00-0AA0</b>
<b>Terminating connector</b>	<b>6ES7 461-0AA00-7AA0</b>
for IM 461-0	



### Overview



- Send interface module for central expansion to 1.5 m
- Transmission of P bus
- With voltage supply for expansion units
- Can be plugged into the central controller
- Up to 2 expansion racks can be connected (up to 1 per interface)
- Can be used exclusively with IM 461-1

### Technical specifications

6ES7 460-1BA01-0AB0	
<b>Input current</b>	
from backplane bus 5 V DC, max.	85 mA
<b>Power losses</b>	
Power loss, max.	425 mW
<b>Hardware configuration</b>	
Cable length between first and last interface module, max.	1.5 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b>	
Weight, approx.	600 g

### Ordering data

Ordering data	Order No.
<b>IM 460-1 interface module</b>	<b>6ES7 460-1BA01-0AB0</b>
Send interface module for central connection up to 1.5 m; with 5 V power supply, without C bus transmission	
<b>468-3 connecting cable</b>	
between IM 460-1 and IM 461-1	
0.75 m	<b>6ES7 468-3AH50-0AA0</b>
1.5 m	<b>6ES7 468-3BB50-0AA0</b>

# SIMATIC S7-400

## Interface modules

### IM 461-1

#### Overview



- Receive interface for central expansion up to 1.5 m
- Transmission of P bus
- With voltage supply for expansion racks
- Can be plugged into expansion rack
- Can be used exclusively with IM 460-1

#### Technical specifications

6ES7 461-1BA01-0AA0	
<b>Input current</b>	
from backplane bus 5 V DC, max.	120 mA
<b>Power losses</b>	
Power loss, max.	600 mW
<b>Hardware configuration</b>	
Cable length between first and last interface module, max.	1.5 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b>	
Weight, approx.	610 g

#### Ordering data

Ordering data	Order No.
<b>IM 461-1 interface module</b>	<b>6ES7 461-1BA01-0AA0</b>
Receive IM for central coupling up to max. 1.5 m; without C bus transfer	
<b>468-3 connecting cable</b>	
For connecting IM 460-1 and IM 461-1	
0.75 m	<b>6ES7 468-3AH50-0AA0</b>
1.5 m	<b>6ES7 468-3BB50-0AA0</b>

### Overview



- Send interface module for distributed expansion to 102 m
- Transmission of K and P bus
- Can be plugged into the central controller
- Up to 8 expansion racks can be connected (up to 4 per interface)
- Can be used exclusively with IM 461-3

### Technical specifications

6ES7 460-3AA01-0AB0	
<b>Input current</b>	
from backplane bus 5 V DC, max.	1 550 mA
<b>Power losses</b>	
Power loss, max.	7 750 mW
<b>Hardware configuration</b>	
Cable length between first and last interface module, max.	102.25 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b>	
Weight, approx.	630 g

### Ordering data

Ordering data	Order No.
<b>IM 460-3 interface module</b>	<b>6ES7 460-3AA01-0AB0</b>
Send interface module for distributed connection up to 102 m; with C bus transmission	
<b>468-1 connecting cable</b>	
between IM 460-3 and IM 461-3	
0.75 m	<b>6ES7 468-1AH50-0AA0</b>
1.5 m	<b>6ES7 468-1BB50-0AA0</b>
5 m	<b>6ES7 468-1BF00-0AA0</b>
10 m	<b>6ES7 468-1CB00-0AA0</b>
25 m	<b>6ES7 468-1CC50-0AA0</b>
50 m	<b>6ES7 468-1CF00-0AA0</b>
100 m	<b>6ES7 468-1DB00-0AA0</b>

# SIMATIC S7-400

## Interface modules

### IM 461-3

#### Overview



- Receive interface for distributed expansion up to 102 m
- Transmission of data from the P-bus and C-bus
- Can be plugged into expansion rack
- To be used exclusively with IM 460-3

#### Technical specifications

6ES7 461-3AA01-0AA0	
<b>Input current</b>	
from backplane bus 5 V DC, max.	620 mA
<b>Power losses</b>	
Power loss, max.	3 100 mW
<b>Hardware configuration</b>	
Cable length between first and last interface module, max.	102.25 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b>	
Weight, approx.	620 g

#### Ordering data

Ordering data	Order No.
<b>IM 461-3 interface module</b>	<b>6ES7 461-3AA01-0AA0</b>
Receiving interface module for distributed connection up to 102 m; with C bus transmission	
<b>468-1 connecting cable</b>	
between IM 460-3 and IM 461-3	
0.75 m	<b>6ES7 468-1AH50-0AA0</b>
1.5 m	<b>6ES7 468-1BB50-0AA0</b>
5 m	<b>6ES7 468-1BF00-0AA0</b>
10 m	<b>6ES7 468-1CB00-0AA0</b>
25 m	<b>6ES7 468-1CC50-0AA0</b>
50 m	<b>6ES7 468-1CF00-0AA0</b>
100 m	<b>6ES7 468-1DB00-0AA0</b>
<b>Terminating connector</b>	<b>6ES7 461-3AA00-7AA0</b>
for IM 461-3	

### Overview



- Send interface for distributed expansion with SIMATIC S5 expansion racks up to 600 m
- Can be plugged into the central controller
- Up to 8 SIMATIC S5 expansion racks can be connected (up to 4 per interface)
- Can be used exclusively with IM 314

### Technical specifications

6ES7 463-2AA00-0AA0	
<b>Input current</b> from backplane bus 5 V DC, max.	1 320 mA
<b>Power losses</b> Power loss, max.	6 600 mW
<b>Hardware configuration</b> Cable length between first and last interface module, max.	600 m
<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	217 mm
<b>Weight</b> Weight, approx.	360 g

### Ordering data

**IM 463-2 interface module**  
Receiving IM for distributed coupling of SIMATIC S5-EUs up to max. 600 m

### Order No.

**6ES7 463-2AA00-0AA0**

# SIMATIC S7-400

## SIPLUS interface modules

### SIPLUS IM 460-0

#### Overview



- Send interface module for centralized expansion up to 5 m
- Transfer from P and K Bus
- Plug into central controller
- You may connect up to 8 expansion units (max. 4 per port)
- Usable exclusively with IM 461-0

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

<b>SIPLUS IM 460-0</b>	
<b>Order number</b>	<b>6AG1 460-0AA01-2AB0</b>
<b>Order No. based on</b>	<b>6ES7 460-0AA01-0AB0</b>
Ambient temperature range	-25 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions.
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

<b>Ordering data</b>	<b>Order No.</b>
<b>SIPLUS IM 460-0 interface module</b> (extended temperature range and medial exposure) Send IM for central coupling up to 5 m; with C bus transfer	<b>6AG1 460-0AA01-2AB0</b>
<b>Accessories</b>	See SIMATIC IM 460-0, page 6/135

# SIMATIC S7-400

## SIPLUS interface modules

### SIPLUS IM 461-0

#### Overview



- Receive interface connection for central extension up to 5 m
- Transfer from P and K Bus
- Pluggable in extension device
- Usable exclusively with IM 460-0

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS IM 461

<b>Order No.</b>	<b>6AG1 461-0AA01-2AA0</b>
<b>Order No. based on</b>	<b>6AG1 461-0AA01-2AA0</b>
Ambient temperature range	-25 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions.
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

#### Ordering data

#### SIPLUS IM 461-0 interface module

(extended temperature range and medial exposure)

Receiving IM for central coupling up to 5 m; with C bus transfer

#### Accessories

#### Order No.

**6AG1 461-0AA01-2AA0**

See SIMATIC IM 461-0, page 6/136

# SIMATIC S7-400

## Power supplies

### PS 405/407 power supply

#### Overview



- Power supplies for SIMATIC S7-400
- For conversion of AC or DC line voltages to the 5 V DC and 24 V DC operating voltages required
- 4 A, 10 A and 20 A output currents
- In addition:
  - SIPLUS power supply 6AG1 405-0KA02-2AA0 for temperature range of -25 to +60 °C and use under medium load (e.g. chlorine/sulfur atmosphere). Technical specifications similar to 6ES7 405-0KA02-0AA0
  - SIPLUS power supply 6AG1 407-0KA02-4AA0 for use under medium load (e.g. chlorine/sulfur atmosphere). Technical specifications similar to 6ES7 407-0KA02-0AA0
  - SIPLUS power supply 6AG1 407-0KR02-4AA0 for use under medium load (e.g. chlorine/sulfur atmosphere). Technical specifications similar to 6ES7 407-0KR02-0AA0

#### Technical specifications

	6ES7 405-0DA02-0AA0 PS405, 24 VDC, 5 VDC/4 A	6ES7 405-0KA02-0AA0 PS405, 24/48/60 VDC, 5 VDC/10 A	6ES7 405-0KR02-0AA0 PS405,24/48/60 VDC, 5 VDC/10 A,RED	6ES7 405-0RA02-0AA0 PS405, 24/48/60 VDC, 5 VDC/20 A
<b>Supply voltage</b>				
Rated value, 24 V DC	Yes	Yes	Yes	Yes
Rated value, 48 V DC	Yes	Yes	Yes	Yes
Rated value, 60 V DC	Yes	Yes	Yes	Yes
permissible range, lower limit (DC)	19.2 V; Dynamic 18.5 V	19.2 V; Dynamic 18.5 V	19.2 V; Dynamic 18.5 V	19.2 V; Dynamic 18.5 V
permissible range, upper limit (DC)	72 V; dynamic 75.5 V	72 V; dynamic 75.5 V	72 V; dynamic 75.5 V	72 V; dynamic 75.5 V
<b>Mains buffering</b>				
• Mains/voltage failure stored energy time	20 ms	20 ms	20 ms	20 ms
• Mains buffering according to NAMUR recommendation	Yes	Yes	Yes	Yes
<b>Input current</b>				
Rated value at 24 V DC	2 A	4 A	4 A	7 A
Rated value at 48 V DC	1 000 mA	2 A	2 A	3.2 A
Rated value at 60 V DC	800 mA	1.6 A	1.6 A	2.5 A
Inrush current, max.	18 A; Full width at half maximum 20 ms	18 A; Full width at half maximum 20 ms	18 A; Full width at half maximum 20 ms	56 A; Full width at half maximum 1.5 ms
<b>Output voltage</b>				
Rated value, 5 V DC	Yes	Yes	Yes	Yes
Rated value, 24 V DC	Yes	Yes	Yes	Yes
<b>Output current</b>				
for backplane bus (5 V DC), max.	4 A; no base load required	10 A; no base load required	10 A; no base load required	20 A; no base load required
for backplane bus (24 V DC), max.	0.5 A; idling-proof	1 A; idling-proof	1 A; idling-proof	1 A; idling-proof
Short-circuit protection	Yes	Yes	Yes	Yes
<b>Power</b>				
Power consumption, typ.	48 W	95 W	95 W	168 W
<b>Power losses</b>				
Power loss, typ.	16 W	20 W	20 W	44 W



### Technical specifications (continued)

	<b>6ES7 405-0DA02-0AA0</b> <b>PS405, 24 VDC, 5 VDC/4 A</b>	<b>6ES7 405-0KA02-0AA0</b> <b>PS405, 24/48/60 VDC,</b> <b>5 VDC/10 A</b>	<b>6ES7 405-0KR02-0AA0</b> <b>PS405,24/48/60 VDC,</b> <b>5 VDC/10 A,RED</b>	<b>6ES7 405-0RA02-0AA0</b> <b>PS405, 24/48/60 VDC,</b> <b>5 VDC/20 A</b>
Backup battery				
• Backup battery - Backup battery (optional)	Yes; 1 x lithium AA; 3.6 V/2.3 Ah	Yes; 2 x lithium AA; 3.6 V/2.3 Ah	Yes; 2 x lithium AA; 3.6 V/2.3 Ah	Yes; 2 x lithium AA; 3.6 V/2.3 Ah
<b>Galvanic isolation</b>				
primary/secondary	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>				
Protection class	1; with protective conductor	1; with protective conductor	1; with protective conductor	1; with protective conductor
<b>Standards, approvals, certificates</b>				
FM approval	Yes; Ta: 0 °C to 60 °C T4	Yes; Ta: 0 °C to 60 °C T4	Yes; Ta: 0 °C to 60 °C T4	Yes; Ta: 0 °C to 60 °C T4
<b>Connection method</b>				
Connecting cables/cross sections	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm
<b>Dimensions</b>				
Width	25 mm	50 mm	50 mm	50 mm
Height	290 mm	290 mm	290 mm	290 mm
Depth	217 mm	217 mm	217 mm	217 mm
Required slots	1	2	2	2
<b>Weight</b>				
Weight, approx.	760 g	1 200 g	1 200 g	1 300 g
	<b>6ES7 407-0DA02-0AA0</b>	<b>6ES7 407-0KA02-0AA0</b>	<b>6ES7 407-0KR02-0AA0</b>	<b>6ES7 407-0RA02-0AA0</b>
<b>Supply voltage</b>				
Rated value, 110 V DC	Yes; Rated value 120 V DC	Yes; Rated value 120 V DC	Yes; Rated value 120 V DC	Yes; Rated value 120 V DC
Rated value, 230 V DC	Yes	Yes	Yes	Yes
permissible range, lower limit (DC)	88 V	88 V	88 V	88 V
permissible range, upper limit (DC)	300 V	300 V	300 V	300 V
Rated value, 120 V AC	Yes	Yes	Yes	Yes
Rated value, 230 V AC	Yes	Yes	Yes	Yes
Line frequency				
• Rated value 50 Hz	Yes	Yes	Yes	Yes
• Rated value 60 Hz	Yes	Yes	Yes	Yes
• Frequency of the supply voltage	47 Hz	47 Hz	47 Hz	47 Hz
• Frequency of the supply voltage	63 Hz	63 Hz	63 Hz	63 Hz
Mains buffering				
• Mains/voltage failure stored energy time	20 ms	20 ms	20 ms	20 ms
• Mains buffering according to NAMUR recommendation	Yes	Yes	Yes	Yes
<b>Input current</b>				
Rated value at 110 V DC	350 mA; at 120 V DC	1 A; at 120 V DC	1 A; at 120 V DC	1.4 A; at 120 V DC
Rated value at 230 V DC	190 mA	0.5 A	0.5 A	0.7 A
Rated value at 120 V AC	0.42 A	0.9 A	0.9 A	1.4 A
Rated value at 230 V AC	0.22 A	0.5 A	0.5 A	0.7 A
Inrush current, max.	8.25 A; Full width at half maximum 5 ms	63 A; Full width at half maximum 1 ms	63 A; Full width at half maximum 1 ms	88 A; Full width at half maximum 1.1 ms
<b>Output voltage</b>				
Rated value, 5 V DC	Yes	Yes	Yes	Yes
Rated value, 24 V DC	Yes	Yes	Yes	Yes

## SIMATIC S7-400

## Power supplies

## PS 405/407 power supply

## Technical specifications (continued)

	6ES7 407-0DA02-0AA0	6ES7 407-0KA02-0AA0	6ES7 407-0KR02-0AA0	6ES7 407-0RA02-0AA0
<b>Output current</b>				
for backplane bus (5 V DC), max.	4 A; no base load required	10 A; no base load required	10 A; no base load required	20 A; no base load required
for backplane bus (24 V DC), max.	0.5 A; idling-proof	1 A; idling-proof	1 A; idling-proof	1 A; idling-proof
Short-circuit protection	Yes	Yes	Yes	Yes
<b>Power</b>				
Power consumption, typ.	52 W	95 W	95 W	158 W
<b>Power losses</b>				
Power loss, typ.	20 W	20 W	20 W	35 W
Backup battery				
• Backup battery				
- Backup battery (optional)	Yes; 1 x lithium AA; 3.6 V/2.3 Ah	Yes; 2 x lithium AA; 3.6 V/2.3 Ah	Yes; 2 x lithium AA; 3.6 V/2.3 Ah	Yes; 2 x lithium AA; 3.6 V/2.3 Ah
<b>Galvanic isolation</b>				
primary/secondary	Yes	Yes	Yes	Yes
<b>EMC</b>				
Compliance with line harmonic distortion limits				
• Observance of line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>				
Protection class	1; with protective conductor	1; with protective conductor	1; with protective conductor	1; with protective conductor
<b>Standards, approvals, certificates</b>				
FM approval	Yes; Ta: 0 °C to 60 °C T4	Yes; Ta: 0 °C to 60 °C T4	Yes; Ta: 0 °C to 60 °C T4	Yes; Ta: 0 °C to 60 °C T4
<b>Connection method</b>				
Connecting cables/cross sections	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm	3 x 1.5 mm <sup>2</sup> , solid or stranded wire with end sleeve, external diameter 3 to 9 mm
<b>Dimensions</b>				
Width	25 mm	50 mm	50 mm	50 mm
Height	290 mm	290 mm	290 mm	290 mm
Depth	217 mm	217 mm	217 mm	217 mm
Required slots	1	2	2	2
<b>Weight</b>				
Weight, approx.	760 g	1 200 g	1 200 g	1 300 g

# SIMATIC S7-400

## Power supplies

### PS 405/407 power supply

Ordering data	Order No.	Ordering data	Order No.
<b>PS 405 power supply modules</b>		<b>PS 407 power supply modules</b>	
24 V DC; 5 V DC, 24 V DC		120/230 V AC; 5 V DC, 24 V DC	
4 A	<b>6ES7 405-0DA02-0AA0</b>	4 A	<b>6ES7 407-0DA02-0AA0</b>
10 A, wide range	<b>6ES7 405-0KA02-0AA0</b>	10 A	<b>6ES7 407-0KA02-0AA0</b>
10 A, redundant, wide range	<b>6ES7 405-0KR02-0AA0</b>	10 A, redundant	<b>6ES7 407-0KR02-0AA0</b>
20 A, wide range	<b>6ES7 405-0RA02-0AA0</b>	20 A	<b>6ES7 407-0RA02-0AA0</b>
<b>Power plug for PS 405</b>	<b>6ES7 490-0AA00-0AA0</b>	<b>Power plug for PS 407</b>	<b>6ES7 490-0AB00-0AA0</b>
Spare part		Spare part	
<b>Backup battery</b>	<b>6ES7 971-0BA00</b>	<b>Backup battery</b>	<b>6ES7 971-0BA00</b>
Type AA; 3.6 V/2.3 Ah		Type AA; 3.6 V/2.3 Ah	
		<b>SITOP power supplies</b>	See Catalog KT 01
		For the 24 V supply of motors or sensors	
		<b>Add-on modules and DC-UPS</b>	See Catalog KT 01
		To increase system availability	

# SIMATIC S7-400

## SIPLUS power supplies

### SIPLUS power supplies

#### Overview



- Power supplies for SIPLUS S7-400
- For conversion of AC or DC line voltages to the 5 V DC and 24 V DC operating voltages required
- 4 A, 10 A and 20 A output currents

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

#### SIPLUS S7-400 PS

Order No.	6AG1 405-0KA02-7AA0	6AG1 407-0KA02-4AA0	6AG1 407-0KR02-4AA0
Order number based on	6ES7 405-0KA02-0AA0	6ES7 407-0KA02-0AA0	6ES7 407-0KR02-0AA0
Ambient temperature range	-25 ... +70 °C	-0 ... +60 °C	-0 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components		
Technical data	The technical data of the standard product applies, except for the ambient conditions		

#### Ambient conditions

Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!
Air pressure (depending on the highest positive temperature range specified)	1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K

For technical documentation on SIPLUS, see:

[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

#### Ordering data

##### SIPLUS PS 405 power supply modules

(extended temperature range and medial exposure)

24 V DC; 5 V DC, 24 V DC

10 A, wide range

#### Order No.

6AG1 405-0KA02-7AA0

##### SIPLUS PS 407 power supply modules

(medial exposure)

120/230 V AC; 5 V DC, 24 V DC

10 A

10 A, redundant

6AG1 407-0KA02-4AA0

6AG1 407-0KR02-4AA0

#### Accessories

#### Order No.

See SIMATIC PS 405/407 power supply, page 6/147

#### Overview

##### Labeling sheets

- Film sheets for application-specific labeling of SIMATIC S7-400 I/O modules with commercial laser printers
- Single-color films, tear-resistant, dirt-resistant
- Easy handling:
  - Pre-perforated labeling sheets in DIN A4 format to allow easy separation of the labeling strips
  - The separated strips can be inserted directly into the I/O modules
- Different colors for distinction between module types or preferred areas of application:  
The labeling sheets are available in the colors teal, light beige, red and yellow. Yellow is reserved for failsafe systems.

##### Label cover

- Film to cover and hold user-made labeling strips on normal paper
- Accessories, 10 pieces

#### Ordering data

#### Order No.

##### Labeling sheets

DIN A4, for printing using laser printer; 10 pieces

Petrol

**6ES7 492-2AX00-0AA0**

Light beige

**6ES7 492-2BX00-0AA0**

Yellow

**6ES7 492-2CX00-0AA0**

Red

**6ES7 492-2DX00-0AA0**

##### Cover film for labeling strips

**6ES7 492-2XX00-0AA0**

10 pieces (spare part)

# SIMATIC S7-400

## Accessories

### Spare parts

#### Overview

##### **Cover film for labeling strips**

- Petrol-colored film for covering and fixing labeling strips created by the user
- On normal paper
- Spare part

##### **Measuring range module for analog input modules**

- Pluggable module for selecting the input ranges in the case of analog modules
- 1 module for 2 inputs
- Spare part

##### **Slot cover**

- Cover plates for unused slots in module racks
- Spare part, 10 units

##### **Power supply connectors**

- Plug for connecting the PS 405 and PS 407 power supply modules to the network
- Spare part

##### **Replacement fan**

- Fan unit for installation into the fan subassembly
- Spare part

#### Ordering data

#### Order No.

<b>Cover foil for labeling strip</b> 10 units (spare part)	<b>6ES7 492-2XX00-0AA0</b>
<b>Range card for analog input modules</b> 1 card for 2 inputs; 2 units (spare part)	<b>6ES7 974-0AA00-0AA0</b>
<b>Slot covers</b> for racks; 10 units (spare part)	<b>6ES7 490-1AA00-0AA0</b>
<b>Power plug for PS 405</b> Spare part	<b>6ES7 490-0AA00-0AA0</b>
<b>Power plug for PS 407</b> Spare part	<b>6ES7 490-0AB00-0AA0</b>
<b>Replacement fan</b> Spare part	<b>6ES7 408-1TA00-6AA0</b>

### Overview



The ET 200M system with various interface modules is available for the decentralized use of S7-300 I/O modules. Depending on the application purpose, the best suited IM in terms of costs and functions can be selected:

#### **IM 153-1 Standard**

The IM 153-1 is one reasonably priced variant that is best suited for most applications in the manufacturing environment. It permits the use of up to 8 S7-300 I/O modules.

#### **IM 153-2 High Feature**

For higher requirements in manufacturing technology, such as the use of F-technology or the highest performance in conjunction with clock synchronization, the IM 153-2 High Feature is available. This IM is also designed for use with the PCS 7 in the field of manufacturing applications. This IM can be redundantly used and supports typical functions as they are required in the control field. These include, for example, clock synchronization or time stamping with an accuracy of up to 1ms.

### Technical specifications

	6ES7 153-1AA03-0XB0	6ES7 153-2BA02-0XB0	6ES7 153-2BA82-0XB0
<b>General information</b>			
Vendor identification (VendorID)	801Dh	801Eh	801Eh
<b>Supply voltage</b>			
24 V DC	Yes	Yes	Yes
permissible range, lower limit (DC)	20.4 V	20.4 V	20.4 V
permissible range, upper limit (DC)	28.8 V	28.8 V	28.8 V
permissible range (ripple included), lower limit (DC)	20.4 V	20.4 V	20.4 V
permissible range (ripple included), upper limit (DC)	28.8 V	28.8 V	28.8 V
External protection for supply cables (recommendation)	not necessary	2.5 A	2.5 A
<b>Mains buffering</b>			
• Mains/voltage failure stored energy time	5 ms	5 ms	5 ms
<b>Input current</b>			
Current consumption, max.	350 mA; at 24 V DC	650 mA	650 mA
Rated value at 24 V DC	625 mA		
Inrush current, typ.	2.5 A	3 A	3 A
$I^2t$	0.1 A <sup>2</sup> ·s	0.1 A <sup>2</sup> ·s	0.1 A <sup>2</sup> ·s
<b>Output voltage</b>			
Rated value, 5 V DC	Yes	Yes	Yes
<b>Output current</b>			
for backplane bus (5 V DC), max.	1 A	1.5 A	1.5 A
<b>Power losses</b>			
Power loss, typ.	3 W	5.5 W	5.5 W

# SIMATIC S7-400

## Modules for SIMATIC S7-400F/FH

IM 153-1/153-2

### Technical specifications (continued)

	6ES7 153-1AA03-0XB0	6ES7 153-2BA02-0XB0	6ES7 153-2BA82-0XB0
<b>Address area</b>			
Addressing volume			
• Outputs	128 byte	244 byte	244 byte
• Inputs	128 byte	244 byte	244 byte
<b>Hardware configuration</b>			
Number of modules per DP slave interface, max.	8	12	12
<b>Time stamping</b>			
Accuracy		1 ms; 1ms at up to 8 modules; 10ms at up to 12 modules	1 ms; 1ms at up to 8 modules; 10ms at up to 12 modules
Number of message buffers		15	15
Messages per message buffer		20	20
Number of stampable digital inputs, max.		128; Max. 128 signals/station; max. 32 signals/slot	128; Max. 128 signals/station; max. 32 signals/slot
Time format		RFC 1119	RFC 1119
Time resolution		0.466 ns	0.466 ns
Time interval for transmitting the message buffer if a message is present		1 000 ms	1 000 ms
Time stamp on signal change		rising / falling edge as signal entering or exiting	rising / falling edge as signal entering or exiting
<b>Interfaces</b>			
Interface physics, RS 485	Yes	Yes	Yes
Interface physics, FOC	No	No	No
<b>PROFIBUS DP</b>			
• Node addresses	1 to 125 permitted	1 to 125 permitted	1 to 125 permitted
• Automatic detection of transmission speed	Yes	Yes	Yes
• PROFIBUS DP, output current, max.	90 mA	70 mA	70 mA
• Transmission procedure	RS 485	RS 485	RS 485
• Transmission rate, max.	12 Mbit/s	12 Mbit/s	12 Mbit/s
• SYNC capability	Yes	Yes	Yes
• FREECE capability	Yes	Yes	Yes
• Direct data exchange (slave-to-slave communication)	Yes; Sender	Yes; Sender	Yes; Sender
• PROFIBUS DP	9-pin sub D socket	9-pin sub D	9-pin sub D
<b>1st interface</b>			
DP slave			
• GSD file	(for DPV1) SIEM801D.GSD; SI01801D.GSG	SI04801.GSG	SI0480E.GSG
• Automatic baud rate search	Yes	Yes	Yes
<b>Communication functions</b>			
Bus protocol/transmission protocol	PROFIBUS DP to EN 50170	PROFIBUS DP to EN 50170	PROFIBUS DP to EN 50170
<b>Isolation</b>			
Isolation checked with	Isolation voltage 500 V	Isolation voltage 500 V	Isolation voltage 500 V
<b>Degree and class of protection</b>			
IP20	Yes	Yes	Yes
<b>Ambient conditions</b>			
Operating temperature			
• Min.	0 °C	0 °C	-25 °C
• max.	60 °C	60 °C	60 °C
Air pressure			
• Operating altitude above sea level, max.	3 000 m	3 000 m	3 000 m
<b>Dimensions</b>			
Width	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	117 mm	117 mm	117 mm
<b>Weight</b>			
Weight, approx.	360 g	360 g	360 g

6



### Technical specifications (continued)

6ES7 195-7HD10-0XA0		6ES7 195-7HA00-0XA0		6ES7 195-7HB00-0XA0		6ES7 195-7HC00-0XA0	
<b>Accessories</b>							
belongs to product	ET 200M						
<b>Dimensions</b>							
Width	97 mm						
Height	92 mm						
Depth	30 mm						
<b>Weight</b>							
Weight, approx.	133 g						
<b>Dimensions</b>							
Width	97 mm	97 mm	97 mm	97 mm	97 mm	97 mm	97 mm
Height	92 mm	92 mm	92 mm	92 mm	92 mm	92 mm	92 mm
Depth	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm
<b>Weight</b>							
Weight, approx.	111 g	140 g	140 g	140 g	127 g	127 g	127 g

### Ordering data

Ordering data	Order No.	Ordering data	Order No.
<b>IM 153-1 interface module</b> Slave interface for connecting an ET 200M to PROFIBUS DP <ul style="list-style-type: none"> <li>Standard temperature range</li> </ul>	<b>6ES7 153-1AA03-0XB0</b>	<b>Accessories</b> <b>PROFIBUS bus connector</b> 90° outgoing cable, terminating resistor with disconnecting function, up to 12 Mbit/s, FastConnect  Without PG interface <ul style="list-style-type: none"> <li>1 unit</li> <li>100 units</li> </ul> With PG interface <ul style="list-style-type: none"> <li>1 unit</li> <li>100 units</li> </ul>	<b>6ES7 972-0BA52-0XA0</b> <b>6ES7 972-0BA52-0XB0</b>  <b>6ES7 972-0BB52-0XA0</b> <b>6ES7 972-0BB52-0XB0</b>
<b>IM 153-2 interface module</b> Slave interface for connecting an ET 200M to PROFIBUS DP; also for use in redundant systems <ul style="list-style-type: none"> <li>High Feature</li> <li>High Feature with extended temperature range</li> </ul>	<b>6ES7 153-2BA02-0XB0</b> <b>6ES7 153-2BA82-0XB0</b>	<b>SIMATIC DP DIN rail for ET 200M</b> Accommodates up to 5 bus modules; for hot-swapping function <ul style="list-style-type: none"> <li>Length: 483 mm (19")</li> <li>Length: 530 mm</li> <li>Length: 620 mm</li> <li>Length: 2000 mm</li> </ul>	<b>6ES7 195-1GA00-0XA0</b> <b>6ES7 195-1GF30-0XA0</b> <b>6ES7 195-1GG30-0XA0</b> <b>6ES7 195-1GC00-0XA0</b>
<b>Active IM 153/IM 153 bus module</b> For two IM 153-2 High Feature modules for designing redundant systems	<b>6ES7 195-7HD10-0XA0</b>	<b>SIMATIC S7-300 mounting rail</b> <ul style="list-style-type: none"> <li>Length: 160 mm</li> <li>Length: 480 mm (19")</li> <li>Length: 530 mm</li> <li>Length: 830 mm</li> <li>Length: 2000 mm</li> </ul>	<b>6ES7 390-1AB60-0AA0</b> <b>6ES7 390-1AE80-0AA0</b> <b>6ES7 390-1AF30-0AA0</b> <b>6ES7 390-1AJ30-0AA0</b> <b>6ES7 390-1BC00-0AA0</b>
<b>Bus module for ET 200M</b> <ul style="list-style-type: none"> <li>To accommodate a power supply and an IM 153 module for the hot-swapping function during RUN, incl. bus module cover</li> <li>To accommodate two 40-mm wide I/O modules for the hot-swapping function</li> <li>To accommodate one 80-mm wide I/O module for the hot-swapping function</li> </ul>	<b>6ES7 195-7HA00-0XA0</b>  <b>6ES7 195-7HB00-0XA0</b>  <b>6ES7 195-7HC00-0XA0</b>	<b>S7 Manual Collection</b> Electronic manuals on DVD, multi-language: S7-200, TD 200, S7-300, M7-300, C7, S7-400, M7-400, STEP 7, Engineering Tools, Runtime Software, SIMATIC DP (Distributed I/O), SIMATIC HMI (Human Machine Interface), SIMATIC NET (Industrial Communication)	<b>6ES7 998-8XC01-8YE0</b>
<b>ET 200M redundancy bundle</b> Comprising two IM 153-2 High Feature modules and one IM 153/IM 153 bus module	<b>6ES7153-2AR03-0XA0</b>	<b>S7 Manual Collection, update service for 1 year</b> Scope of delivery: Current DVD "S7 Manual Collection" and the three subsequent updates	<b>6ES7 998-8XC01-8YE2</b>

# SIMATIC S7-400

## Modules for SIMATIC S7-400F/FH

### SIPLUS IM 153-1/153-2

#### Overview



#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

6

	<b>SIPLUS IM 153-1</b>	<b>SIPLUS IM 153-2</b>	<b>SIPLUS IM 153-2</b>
<b>Order No.</b>	<b>6AG1 153-1AA03-2XB0</b>	<b>6AG1 153-2BA02-2XY0</b>	<b>6AG1 153-2BA02-7XB0</b>
<b>Order number based on</b>	<b>6ES7 153-1AA03-0XB0</b>	<b>6ES7 153-2BA02-0XB0</b>	<b>6ES7 153-2BA02-0XB0</b>
Ambient temperature range	-40 ... +70 °C Start-up temperature -25 °C	-25 ... +60 °C	-40 ... +70 °C Start-up temperature -25 °C
Compliant with the standards for electronic equipment used on rolling stock (EN 50155, temperature T1, category 1).	No	Yes	No
Conformal coating	Coating of the printed circuit boards and the electronic components		
Technical data	The technical data of the standard product applies except for the ambient conditions.		

<b>SIPLUS bus module</b>	<b>for accommodating a PS and an IM 153</b>	<b>for accommodating two 40 mm wide I/O modules</b>
<b>Order No.</b>	<b>6AG1 195-7HA00-2XA0</b>	<b>6AG1 195-7HB00-7XA0</b>
<b>Order number based on</b>	<b>6ES7 195-7HA00-0XA0</b>	<b>6ES7 195-7HB00-0XA0</b>
Ambient temperature range	-40 ... +70 °C	-40 ... +70 °C
Compliant with the standards for electronic equipment used on rolling stock (EN 50155, temperature T1, category 1).	No	Yes
Conformal coating	Coating of the printed circuit boards and the electronic components	
Technical data	The technical data of the standard product applies except for the ambient conditions.	

<b>SIPLUS bus module</b>	<b>for accommodating an 80 mm module</b>	<b>for accommodating two IM 153-2</b>
<b>Order No.</b>	<b>6AG1 195-7HC00-2XA0</b>	<b>6AG1 195-7HD10-2XA0</b>
<b>Order number based on</b>	<b>6ES7 195-7HC00-0XA0</b>	<b>6ES7 195-7HD10-0XA0</b>
Ambient temperature range	-40 ... +70 °C	-40 ... +70 °C
Compliant with the standards for electronic equipment used on rolling stock (EN 50155, temperature T1, category 1).	No	Yes
Conformal coating	Coating of the printed circuit boards and the electronic components	
Technical data	The technical data of the standard product applies except for the ambient conditions.	

# SIMATIC S7-400

## Modules for SIMATIC S7-400F/FH

SIPLUS IM 153-1/153-2

Overview (continued)		Ordering data	Order No.
<b>Ambient conditions</b>		<b>IM 153-1 interface module</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.	(extended temperature range and medial exposure) Slave interface for connecting an ET 200M to PROFIBUS DP • Standard temperature range	<b>6AG1 153-1AA03-2XB0</b>
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!	<b>IM 153-2 interface module</b>	
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!	(extended temperature range and medial exposure) Slave interface for connecting an ET 200M to PROFIBUS DP; also for use in redundant systems • High Feature, -25 ... +60 °C • High Feature, -40 ... +70 °C	<b>6AG1 153-2BA02-2XY0</b> <b>6AG1 153-2BA02-7XB0</b>
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!	<b>Active IM 153/IM 153 bus module</b>	<b>6AG1 195-7HD10-2XA0</b>
Air pressure (depending on the highest positive temperature range specified)	1 080 ... 795 hPa (-1 000 ... +2 000 m) see ambient temperature range 795 ... 658 hPa (+2 000 ... +3 500 m) derating 10 K 658 ... 540 hPa (+3 500 ... +5 000 m) derating 20 K	(extended temperature range and medial exposure) For two IM 153-2 High Feature modules for designing redundant systems	
		<b>Bus module for ET 200M</b>	
		(extended temperature range and medial exposure) • To accommodate a power supply and an IM 153 for the hot-swapping function during RUN, incl. bus module cover • To accommodate two 40 mm wide I/O modules for the hot-swapping function • To accommodate one 80 mm wide I/O module for the hot swapping function	<b>6AG1 195-7HA00-2XA0</b> <b>6AG1 195-7HB00-7XA0</b> <b>6AG1 195-7HC00-2XA0</b>
		<b>Accessories</b>	See SIMATIC ET 200M IM 153-1/153-2, page 6/153

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

# SIMATIC S7-400

## Modules for SIMATIC S7-400F/FH

### Isolation modules

#### Overview



- Supports mixed operation of fail-safe signal modules in safety mode and S7-300 standard modules in an ET 200M when Cat. 4 or SIL 3 has to be achieved.
- The isolation module is not required if the safety class or safety category to be achieved is less than SIL 3 or Cat. 4, respectively.

When Cat. 4/SIL 3 is required, the isolation module must be implemented in the following situations:

Application	Isolation module must be used
<b>Central use after CPU 31xF-2 DP or CPU 31xF-2 PN/DP</b> <ul style="list-style-type: none"> <li>• Only fail-safe modules in the tier</li> <li>• Standard and fail-safe modules in the tier</li> </ul>	Yes, behind the CPU Yes, after the last standard module and before the first fail-safe module
<b>Central use after CPU 31xF-2 DP or CPU 31xF-2 PN/DP in an expansion rack</b> <ul style="list-style-type: none"> <li>• Only fail-safe modules in the tier</li> <li>• Standard and fail-safe modules in the tier</li> </ul>	Yes, after the IM 36x Yes, after the last standard module and before the first fail-safe module
<b>Distributed behind the IM 153-2 with copper connection</b> <ul style="list-style-type: none"> <li>• Only fail-safe modules in the station</li> <li>• Standard and fail-safe modules in the station</li> </ul>	Yes, after the IM 153-2 Yes, after the last standard module and before the first fail-safe module
<b>Distributed behind the IM 153-2 with fiber-optic connection</b> <ul style="list-style-type: none"> <li>• Only fail-safe modules in the station</li> <li>• Standard and fail-safe modules in the station</li> </ul>	No Yes, after the last standard module and before the first fail-safe module

#### Technical specifications

	<b>6ES7 195-7KF00-0XA0</b>
<b>Weight</b>	
Weight, approx.	10 g

#### Ordering data

	Order No.
<b>Isolation module</b>	<b>6ES7 195-7KF00-0XA0</b>
for simultaneous operation of fail-safe and standard modules in an ET 200M	
<b>Isolation bus module</b>	<b>6ES7 195-7HG00-0XA0</b>
for accommodating the isolating module in an ET 200M	

# SIMATIC S7-400

## Modules for SIMATIC S7-400F/FH

### SIPLUS isolation modules

#### Overview



- Permits combined operation of fail-safe signal modules in safety mode and standard S7-300 modules in the same ET 200M system.
- The isolation module is not required if the safety class SIL 3 or safety category < Cat. 4 is to be achieved.

#### Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

<b>SIPLUS S7-300 isolation module</b>	
<b>Order No.</b>	<b>6AG1 195-7KF00-2XA0</b>
<b>Order No. based on</b>	<b>6ES7 195-7KF00-0XA0</b>
Ambient temperature range	- 25 ... +60 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions.
Compliant with the standards for electronic equipment used on rolling stock (EN 50155, temperature T1, category 1)	Yes
<b>Ambient conditions</b>	
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.

For technical documentation on SIPLUS, see:  
[www.siemens.com/siplus-extreme](http://www.siemens.com/siplus-extreme)

#### Ordering data

#### Order No.

##### SIPLUS isolation module

(extended temperature range and medial exposure)

for simultaneous operation of fail-safe and standard modules in the same ET 200M

**6AG1 195-7KF00-2XA0**

##### Accessories

##### SIPLUS ET 200M isolation bus module F

**6AG1 195-7HG00-2XA0**

# SIMATIC S7-400

## Modules for SIMATIC S7-400F/FH

### Fail-safe I/O modules

#### Overview



- Failsafe input/output modules for use with the SIMATIC S7-400F/FH
- With integrated safety functions
- Can only be plugged into the ET 200M
- Achievable safety classes in safety operation: SIL 2, SIL 3 to IEC 61508, AK 4, AK 6 to DIN V 19250, Category 3, 4 to EN 954-1
- Use in standard mode with high diagnostics requirements
- Also suitable for redundant operation

For more information, see chap. 5, page 5/88.