



Compact External Mount with Temperature Sensing



The TSF70 series is a compact external fitting device, with a high specification thermistor so capable of sensing both liquid level and temperature.

Mounting of this series is with the use of a compression seal, so does not require access to the inside of the tank.

Typical applications include vending machines, commercial washing machines and evaporator units.

They are manufactured in a variety of materials with a choice of gasket materials, to suit most commonly used liquids.

The switch action may be reversed by rotating the device through 180°.

- Compact design with temperature sensing
- Available in Nylon, Polypropylene or PPS
- 25VA & 100VA versions
- Many variants are UL recognised components File No. E171218
- WRAS Approved versions

Technical Specification	TSF73	TSF74	TSF78	TSF76
Material	Nylon	Polypropylene WRAS approved	Polypropylene UL approved	Polyphenylene Sulphide (PPS)
Colour	Black	Opaque	White	Grey
Temp. Range °C	-20 / +75	-20 / +100	-20 / +100	-10 / +120 *
°F	-4 ./ +167	-4 / +212	-4 / +212	+14 / +248 *
Min. Fluid SG	0.85	0.85	0.85	0.85
Must close level (SG=1)	7mm	8mm	8mm	9mm
Must open level (SG=1)	20mm	20mm	20mm	24mm

* Maximum temperature requires ETFE cable to be specified.


Electrical Specification		25W (Y code)	100W (H code)
Contact Form		N/O (N/C)	N/O (N/C)
Switching Power Max	VA	25	100
Switching Voltage AC Max	V	240	300
Switching Voltage DC Max	V	120	300
Switching Current Max	Α	0.6	1
All ratings are for resistive load only.			

Thermistor Specification

Nominal Temperature Resistance 10k Ohm at 25°C Resistance Tolerance +/- 1% (25°C) to +/- 4.3% (120°C) Operating Temperature Range -20°C to +120°C Temperature Sensing Accuracy +/-0.2°C (0°C to +70°C) Beta Value 3892K (0/50°C) Response Time <1 sec Dissipation Constant 0.75mW/K

Standard PartsMaterial	Temperature Max Power	Leadouts	Gasket	Approvals
TSF73H100DN Nylon	-20°C to +75°C 100VA	100cm PVC 16/0.2	Nitrile	WRAS
TSF73Y100DN Nylon	-20°C to +75°C 25VA	100cm PVC 16/0.2	Nitrile	WRAS
TSF74H100DN PP	-20°C to +100C 100VA	100cm PVC 16/0.2	Nitrile	WRAS
TSF74Y100DN PP	-20°C to +100°C 25VA	100cm PVC 16/0.2	Nitrile	WRAS
TSF76H050TV PPS	-10°C to +120°C 100VA	50cm ETFE 19/0.2	Viton	WRAS & UL
TSF76H100DN PPS	-10°C to +100°C 100VA	100cm PVC 16/0.2	Nitrile	WRAS & UL
TSF76Y050TV PPS	-10°C to +120°C 25VA	50cm ETFE 19/0.2	Viton	WRAS & UL
TSF76Y100DN PPS	-10°C to +105°C 25VA	100cm PVC 16/0.2	Nitrile	WRAS & UL
TSF78H100DN PP (UL)	-20°C to +100C 100VA	100cm PVC 16/0.2	Nitrile	UL
TSF78Y100DN PP (UL)	-20°C to +100C 100VA	100cm PVC 16/0.2	Nitrile	UL

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

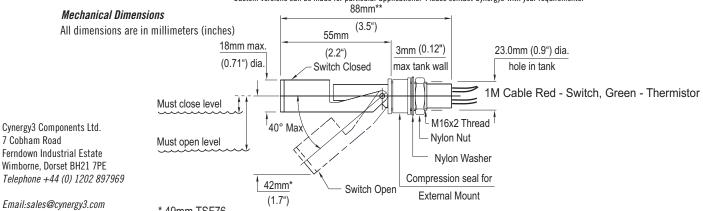

ISO9001 CERTIFIED

* 49mm TSF76

** Add 10m t dims TSF76

www.cynergy3.com