

DM650PM FIELD/WALL MOUNTED PRESSURE DISPLAY

- UP TO 100 BAR PRESSURE / TEMPERATURE DISPLAY WITH SCALING / LINEARISATION
- BATTERY POWERED
- ALARM RELAY, MAX / MIN INFORMATION
- USER SET DISPLAY MESSAGING
- 5000 POINT DATA LOGGER WITH USB AND NFC INTERFACE

➤ INTRODUCTION

The DM650PM battery powered indicator accepts gauge pressure inputs up to 100 bar and displays the sensor pressure in BAR, PSI or the user's engineering unit on a 6-digit LCD display. The instrument offers an advanced display mode allowing the user to also display one or two (1 to 32) character messages. Additional to the messages, the user may select an alert event to occur when the pressure is within a band. A change-over relay can be used together with the messaging and alerts to provide switching at user-set points. In addition to this, on board datalogging is also available to record process details at up to 5000 points. Force calculations (Ram force for example) can also be performed and displayed.

➤ FEATURE HIGHLIGHTS

RELAY

The instrument is equipped with single volt-free change-over type relay. The user may select one of several actions, including deviation operation, with fully adjustable set point and dead-band. An option is provided to trigger an alert event when a relay contact is on.

DATA LOGGING FUNCTION

DM650PM also provides a powerful data logging function. The log points can be set up to 5000 points, each point is time and date stamped together with process value, and relay state information.

The log rate is selectable in steps. The start of log can be delayed if required. Either fixed or rolling logs may be performed.

Two methods of reading the log are available. The USB configuration reads the log and allows the user to save to a text file for export to other programs. The NFC android interface allows data transfer to android phones or tablets, and using the downloadable App, the data can be graphed and forwarded by email, Bluetooth etc. The NFC interface is also capable of starting a new log with different log period and modes.


CALIBRATION / USER LINEARIZATION

5-point calibration can be applied using the USBSpeedLink software.

As well as straight line interpolation, up to 22 points (x,y) of user linearization are available for creating custom curves and corrections.

REAL TIME CLOCK

Date and time can also be displayed with the input pressure. The real-time clock is used to record the data logged points.

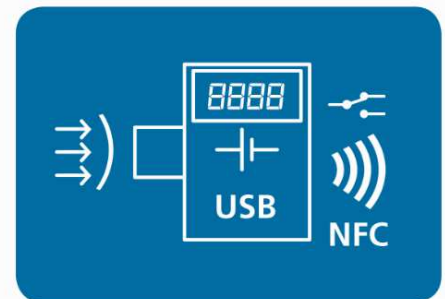

DM650PM FIELD/WALL MOUNTED PRESSURE DISPLAY

INPUT PRESSURE		SPECIFICATIONS @20 °C
Type	Range	Accuracy/stability
Sealed gauge *1	(0 to 3) bar (0 to 30) bar (0 to 100) bar	±0.5% of full scale between (0 to 50) °C *2 ±0.7% of full scale between (-10 to 80) °C *2
	Other ranges	Contact sales@status.co.uk
Overpressure	4 x pressure range	Up to maximum 350 Bar
Thermal drift	(-10 to 80) °C compensated	
*1 Shows zero bar at 1.0 bar absolute		
*2 Total error band: Maximum deviation within specified pressure and operating temperature range		
To maintain full accuracy annual calibration is required contact support@status.co.uk for details		

INPUT Temperature		SPECIFICATIONS @20 °C
Type	Range	Accuracy/stability
	(-40 to 110) °C	Typically, ±2.0 °C

DISPLAY	
Type / options / function	Description
Display height	7.9 mm non-backlit
Display information options Some information is displayed scrolling.	6 digits 14 segment input value plus “Warning”, “Transmit”, “NFC”, “USB”, “Log”, icons, 8 segment log volume indicators. Maximum, minimum. Date and time. Custom messages for visual alarms/information. Relay condition.
High intensity LED	Alarm and warning options

RELAY	
Type/ options/ function	Description
Independent relay	Single pole change-over (common, N/o, N/c)
Rating	48 VDC maximum @ 1 A (5 mA minimum) 28 VAC RMS maximum @ 1 A

USB CONFIGURATION USER INTERFACE		
Type / options / function	Description	Notes
Configuration hardware	USB Mini B port	Cable not included
Configuration software	USBSpeedLink	Download www.status.co.uk
Operating system	Microsoft Windows	Win 7 or later
Sensor configuration	User calibration Off-set in Bar	Up to 5 points Applied by button action
Display configuration	Display mode Pressure units Custom units	Basic with advanced options °C or °F Bar, PS I, mBar, Pa, KPa, MPa Kgf/m ² , Kgf/cm ² , Kgf/mm ² Atm, custom units (any) With 22-point linearization
Pre-set sensor to setpoint	Locks input value to setpoint	For diagnostics
LED alert (advanced mode)	Eight user adjustable pressure bands	Alert LED flash
Warning symbol	Out of range Low battery level	Warning symbol will flash on LCD display