



Dimensions

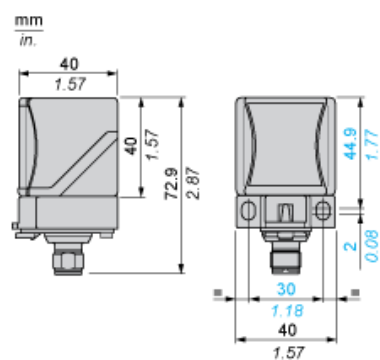


Mounting

Head Positions

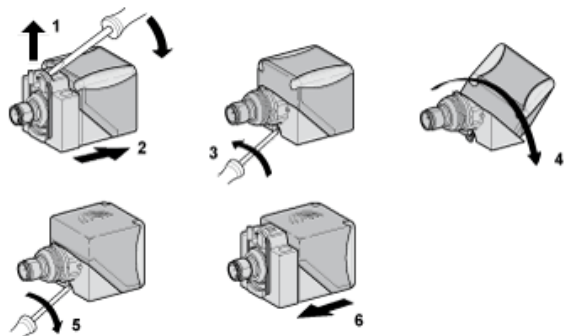

Setting-up

Sensing Distance Correction Factor

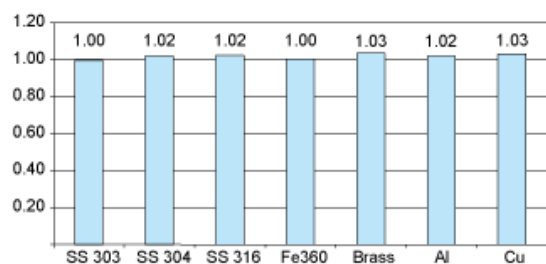

SS : Stainless steel


Fe : Steel

Al : Aluminium

Cu : Copper

Setting-up

Operating Distance (According to the Sensor's Level of Flush Mounting)

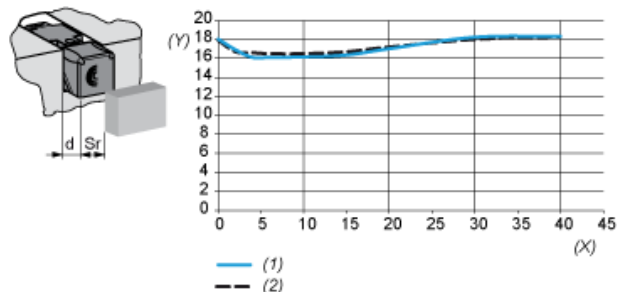

(y) Sensing distance (Sr) mm

(x) Sensing face/frame distance (d) mm

(1) Flush mounted in aluminium

(2) Flush mounted in Fe360