

Photologic® Slotted Optical Switch “Wide Gap” Series

OPB900 through OPB913 Series (L, W_Z)



Electrical Characteristics (T_A = -40°C to + 70° Unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode (See OP240B for more information — for reference only)

V _F	Forward Voltage	-	-	1.7	V	I _F = 20 mA, T _A = 25° C
I _R	Reverse Current	-	-	100	μA	V _R = 2 V, T _A = 25° C

Output Photologic® Sensor (See OPL560 for more information — for reference only)

V _{CC}	Operating D.C. Supply Voltage	4.75	-	5.25	V	
I _{CCL}	Low Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 0 mA ⁽¹⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 20 mA ⁽¹⁾
I _{CCH}	High Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 20 mA ⁽¹⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 0 mA ⁽¹⁾
V _{OL}	Low Level Output Voltage: Buffered Totem-Pole Output Buffered Open-Collector Output	-	-	0.4	V	V _{CC} = 4.75 V, I _{OL} = 12.8 mA, I _F = 0 mA ⁽¹⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output	-	-	0.4	V	V _{CC} = 4.75 V, I _{OL} = 12.8 mA, I _F = 20 mA ⁽¹⁾
V _{OH}	High Level Output Voltage: Buffered Totem-Pole Output	2.4	-	-	V	V _{CC} = 4.75 V, I _{OH} = -800 μA, I _F = 20 mA ⁽¹⁾
	Inverted Totem-Pole Output	2.4	-	-	V	V _{CC} = 4.75 V, I _{OH} = -800 μA, I _F = 0 mA ⁽¹⁾
I _{OH}	High Level Output Current: Buffered Open-Collector Output	-	-	100	μA	V _{CC} = 4.75 V, V _{OH} = 30 V, T _A = 25° C
	Inverted Open-Collector Output	-	-	100	μA	V _{CC} = 4.75 V, V _{OH} = 30 V, T _A = 25° C
I _F (+)	LED Positive-Going Threshold Current	-	-	20	mA	V _{CC} = 5 V, T _A = 25° C
I _F (+)/I _F (-)	Hysteresis	-	2	-	-	V _{CC} = 5 V
I _{OS}	Short Circuit Output Current: Buffered Totem-Pole Output	-30	-	-100	mA	V _{CC} = 5.25 V, I _F = 20 mA Output = GND
	Inverted Totem-Pole Output	-30	-	-100	mA	V _{CC} = 5.25 V, I _F = 0 mA Output = GND
t _r , t _f	Output Rise Time, Output Fall Time	-	70	-	ns	V _{CC} = 5 V, T _A = 25° C I _F = 0 or 20 mA
t _{PLH} , t _{PHL}	Propagation Delay Low-High and High-Low	-	5	-	μs	R _L = 8 TTL Loads (Totem-Pole) R _L = 360 Ω (Open-Collector)

Notes:

(1) Normal application would be with light source blocked, simulated by I_F = 0 mA.





General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Photologic[®] Slotted Optical Switch “Wide Gap” Series

OPB900 through OPB913 Series (L, W_Z)

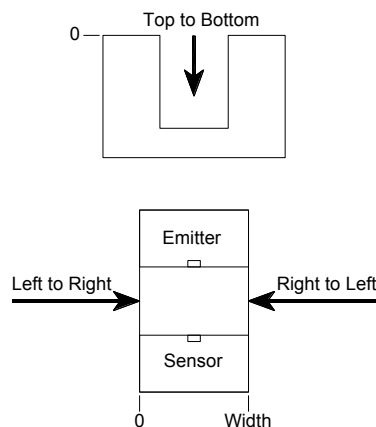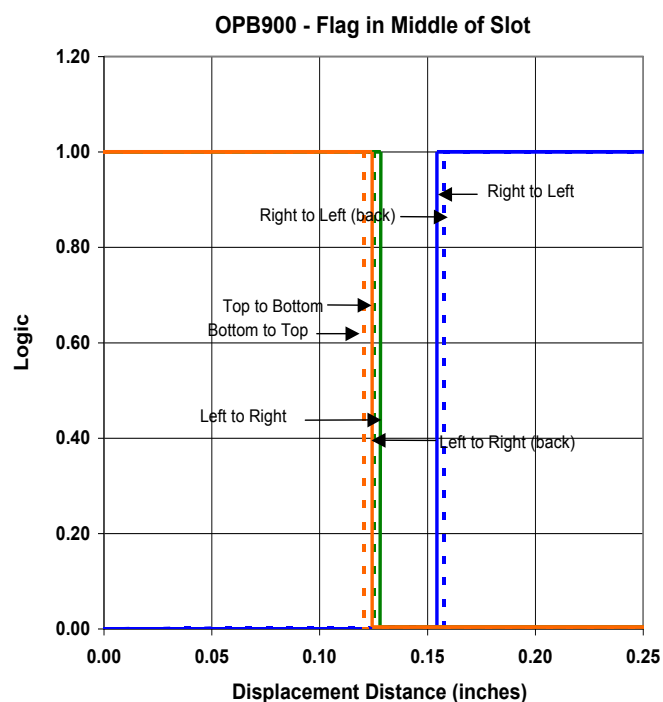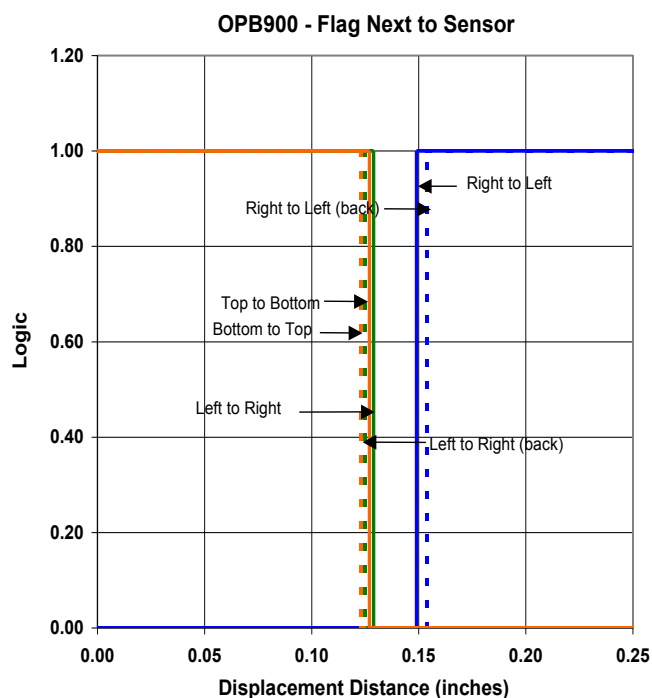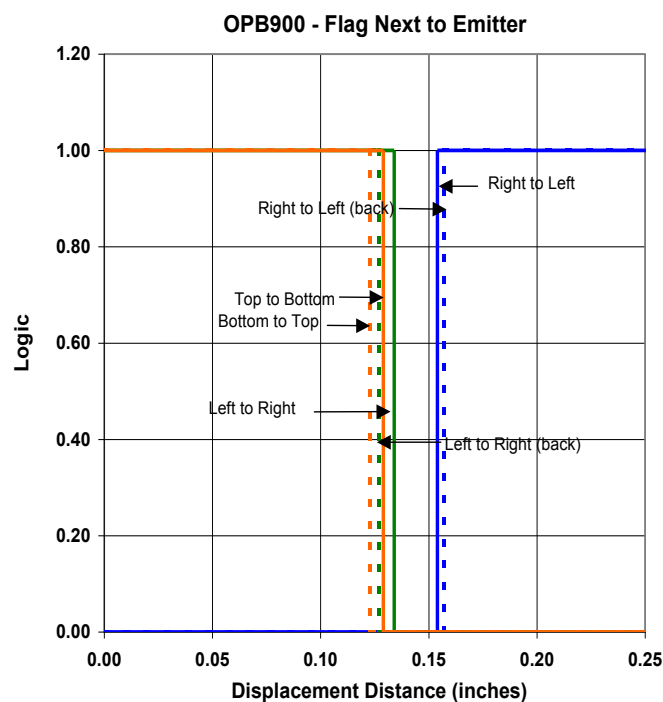

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.