


PRODUCT SPECIFICATION		3 pages			
Individual Product Specification					
<p>Specifications for Prismatic Zinc Carbon Battery 3R12R</p>					
Date of stipulation: 1992-03-02		Stipulated			Described

PRODUCT SPECIFICATION		Mix																														
Individual Product Specification																																
1. Battery identification	name 3R12R type Leclanché/MNO ² / Zn / NH ₄ Cl electrolyte nominal voltage 4.5 V average weight 110 gr. manufactured Made in EU																															
2. Battery dimensions	As per attached drawing Volume : 84.4 cm ³																															
3. Typical battery performance	Discharge modes																															
<table border="1"> <thead> <tr> <th>Test</th> <th>Resistance</th> <th>Daily period</th> <th>End point</th> <th>Result</th> <th>Ampère</th> </tr> </thead> <tbody> <tr> <td></td> <td>15 Ω</td> <td>4 min/h, 8h/d , 7 d/w</td> <td>3.0/2.7 V</td> <td>310m/380m</td> <td>1.18/1.40</td> </tr> <tr> <td></td> <td>10 Ω</td> <td>10 min/d , 7 d/w</td> <td>3.0/2.7 V</td> <td>225m/280m</td> <td>1.21/1.46</td> </tr> <tr> <td></td> <td>75 Ω</td> <td>4h/d, 7 d/w</td> <td>3.0/2.7 V</td> <td>28h/31h</td> <td>1.35/1.47</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			Test	Resistance	Daily period	End point	Result	Ampère		15 Ω	4 min/h, 8h/d , 7 d/w	3.0/2.7 V	310m/380m	1.18/1.40		10 Ω	10 min/d , 7 d/w	3.0/2.7 V	225m/280m	1.21/1.46		75 Ω	4h/d, 7 d/w	3.0/2.7 V	28h/31h	1.35/1.47						
Test	Resistance	Daily period	End point	Result	Ampère																											
	15 Ω	4 min/h, 8h/d , 7 d/w	3.0/2.7 V	310m/380m	1.18/1.40																											
	10 Ω	10 min/d , 7 d/w	3.0/2.7 V	225m/280m	1.21/1.46																											
	75 Ω	4h/d, 7 d/w	3.0/2.7 V	28h/31h	1.35/1.47																											
Open circuit voltage (OCV) Minimum average duration																																
<table border="1"> <thead> <tr> <th></th> <th>Initial*</th> <th>After 12 months storage **</th> </tr> </thead> <tbody> <tr> <td>OCV (at 20±2⁰C)</td> <td>4.5 V</td> <td></td> </tr> <tr> <td>Min. aver. duration (at 20±2⁰C)***</td> <td>22.0 h</td> <td></td> </tr> </tbody> </table>				Initial*	After 12 months storage **	OCV (at 20±2 ⁰ C)	4.5 V		Min. aver. duration (at 20±2 ⁰ C)***	22.0 h																						
	Initial*	After 12 months storage **																														
OCV (at 20±2 ⁰ C)	4.5 V																															
Min. aver. duration (at 20±2 ⁰ C)***	22.0 h																															
<p>* The initial discharge test shall commence with 30 days since manufacture. During this period, the batteries are kept under the condition of 20±2⁰C.</p> <p>** During this period, the batteries shall also be kept under the condition of 20±2⁰C.</p> <p>*** 220 Ω, at 20°C down to 2.7 V</p>																																
4. Mercury and Cadmium contents	No Mercury (Hg) and Cadmium (Cd) are used in battery.																															



Dim	Max	Min
a	62 mm	60 mm
b	22 mm	20 mm
c	67 mm	63 mm
d		23 mm
e		16 mm
f		1 mm
g	7 mm	6 mm

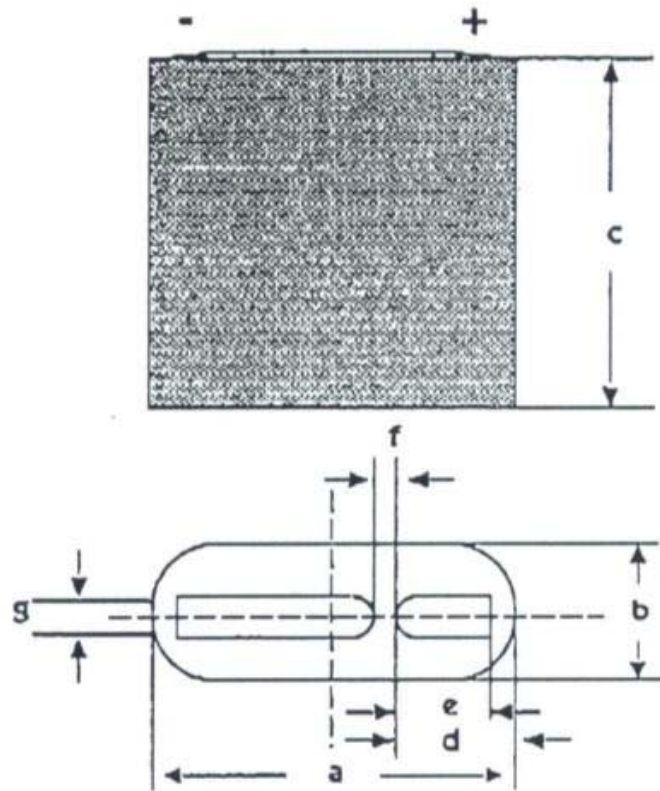