


Data sheet | Item number: 787-2742

Power supply unit; Eco; 3-phase; 24 VDC output voltage; 20 A output current; DC OK contact




www.wago.com/787-2742

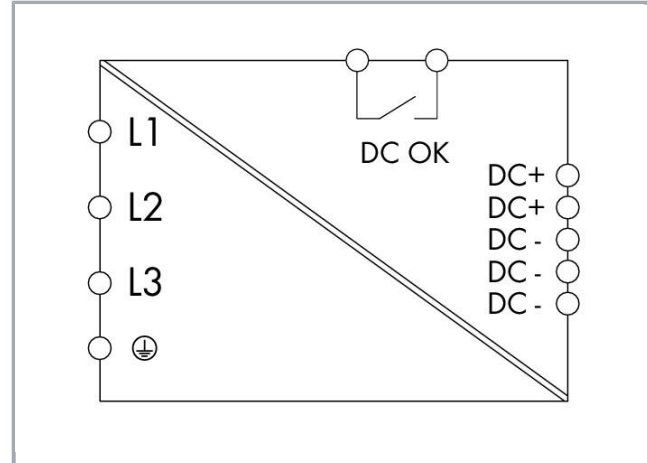

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at {0}.

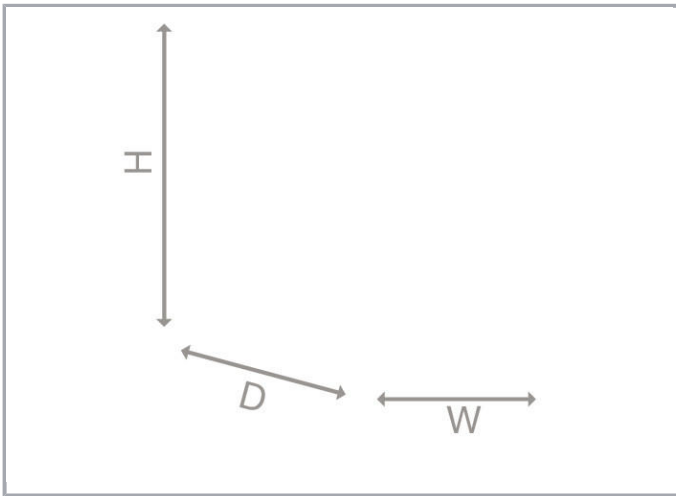

Item description

Features:

- Economical power supply for standard applications
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Fast and tool-free termination via lever-actuated terminal blocks with push-in connection technology
- DC OK signal output
- Parallel operation
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204-1

Data

Technical Data

Input

Phases	2 3
Nominal input voltage $U_{i\text{nom}}$	(2 / 3) x AC 400 ... 480 V
Input voltage range	(2 / 3) x AC 325 ... 575 V; DC 560 ... 700 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	$\leq 3 \times 1,2 \text{ A}$ (400 VAC)
Discharge current	$\leq 3,5 \text{ mA}$
Inrush current	$\leq 30 \text{ A}$ (400 VAC)
Power factor	$\geq 0,7$ (400 VAC)
Power factor correction (PFC)	Passive

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at {0}.