


## Thin Film Chip Fuses

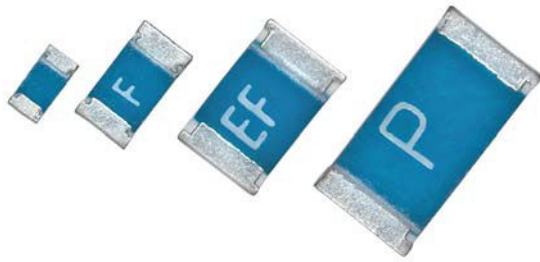

MFU Thin Film Chip Fuses are the perfect choice for the most fields of modern electronics. The highly controlled manufacturing thin film process guarantees an outstanding stability of fusing characteristics. Typical applications include information technology, telecommunication, medical equipment, industrial, audio/video, and automotive electronics.

### FEATURES

- Advanced thin film technology
- Very quick acting fuse characteristics
- Outstanding stability of fusing characteristics
- Green product, supports lead (Pb)-free soldering
- Halogen-free according to IEC 61249-2-21 definition
- Compliant to RoHS Directive 2002/95/EC



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

### APPLICATIONS

- Information technology
- Industrial electronics
- Automotive electronics
- Telecommunication
- Medical equipment
- Audio/video electronics

SIZE				
INCH	0402	0603	0805	1206
METRIC	1005M	1608M	2012M	3216M

TECHNICAL SPECIFICATIONS				
DESCRIPTION	MFU 0402	MFU 0603	MFU 0805	MFU 1206
Metric size	1005M	1608M	2012M	3216M
Rated current range $I_R$	0.5 A to 3.15 A	0.5 A to 5.0 A	0.5 A to 5.0 A	0.5 A to 6.3 A
Rated voltage, $U_{max}$ . DC	32 V	32 V	32 V	63 V
Breaking Capacity, $I_{max}$ . at $U_{max}$ . DC	50 A at 32 V	50 A at 32 V	50 A at 32 V	50 A at 63 V
Voltage drop at $1 \times I_R$	90 mV to 368 mV	85 mV to 361 mV	98 mV to 374 mV	116 mV to 433 mV
Cold resistance at $0.1 \times I_R$	22 m $\Omega$ to 560 m $\Omega$	13 m $\Omega$ to 550 m $\Omega$	15 m $\Omega$ to 570 m $\Omega$	14 m $\Omega$ to 660 m $\Omega$
Permissible film temperature, $\vartheta_{F max}$ .	125 °C			
Operating temperature range	- 55 °C to 125 °C			
Permissible continuous current rating at $\vartheta_{amb} = 23$ °C	0.7 $\times I_R$			
Approval	UL recognition file	E253806		
	IEC 60127-4	n/a	Refer to table: MFU 0603 RATING	Refer to table: MFU 1206 RATING
$FIT_{observed}$	$\leq 0.2 \times 10^{-9}/h$			



**PART NUMBER AND PRODUCT DESCRIPTION (1)**

Part Number: MFU0603FF0100PW00

M	F	U	0	6	0	3	F	F	0	1	0	0	0	P	W	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

MODEL/SIZE	FUSING CHARACTERISTIC	RATED CURRENT	PACKAGING (2)	SPECIAL
MFU0402 MFU0603 MFU0805 MFU1206	FF = Very quick acting	Examples: 0.5 A = <b>00500</b> 1.0 A = <b>01000</b> 6.3 A = <b>06300</b>	E1 E5 E0 P1 P5 PW	Up to 2 digits 00 = Standard

**Product Description: MFU 0603 -FF PW 1A0**

MFU	0603	-FF	PW	1A0
MODEL	SIZE	FUSING CHARACTERISTIC	PACKAGING (2)	RATED CURRENT
MFU	0402 0603 0805 1206	FF = Very quick acting	E1 E5 E0 P1 P5 PW	Examples: 0.5 A = <b>0A5</b> 1.0 A = <b>1A0</b> 6.3 A = <b>6A3</b>

**Notes**

- (1) Products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION
- (2) Please refer to table PACKAGING

PACKAGING							
TYPE	CODE	QUANTITY	CARRIER TAPE	WIDTH	PITCH	REEL DIAMETER	
MFU 0402	E1	1000	Card board tape acc. IEC 60286-3 Type I	8.0	2.0	180 mm/7"	
	E5	5000					
	E0	10 000					
MFU 0603	P1	1000			4.0	8.0	180 mm/7"
	P5	5000					
	PW	20 000					
MFU 0805	P1	1000		4.0	8.0		180 mm/7"
	P5	5000					
	PW	20 000					
MFU 1206	P1	1000		4.0		8.0	180 mm/7"
	P5	5000					
	PW	20 000					