


Product data sheet
3RV1331-4EC10

CIRCUIT-BREAKER N-RELEASE 416 A,
 SIZE S2 STARTER PROTECTION,
 50 KA SCREW CONNECTION STANDARD
 BREAKING CAPACITY

General technical details:


| | |
|--|----------------|
| Continuous current / rated value | 32 A |
| Adjustable response current | |
| <ul style="list-style-type: none"> • of the non-delayed short-circuit release <ul style="list-style-type: none"> • initial value • final value | 416 A 416 A |
| Switch-off capacity limit short-circuit current / at 400 V / rated value | 50 kA |
| Type of voltage | AC/DC |
| Service power | |
| <ul style="list-style-type: none"> • at AC-3 / at 400 V / rated value • for three-phase servomotors / rated value | 15 kW 15 kW |
| Number of poles | 3 |
| Number of NC contacts / for auxiliary contact | 0 |
| Number of NO contacts / for auxiliary contact | 0 |
| Number of change-over switches / for auxiliary contact | 0 |
| Product function / Overload protection | No |

Mechanical design:

| | |
|--|--|
| Design of the electrical connection / for main current circuit | screw-type terminals with box terminals |
| Type of fixing/fixation | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022 |
| Product component / auxiliary switch | No |
| Size of the circuit-breaker | S2 |

Ambient conditions:

| | |
|---------------------|------|
| Protection class IP | IP20 |
|---------------------|------|

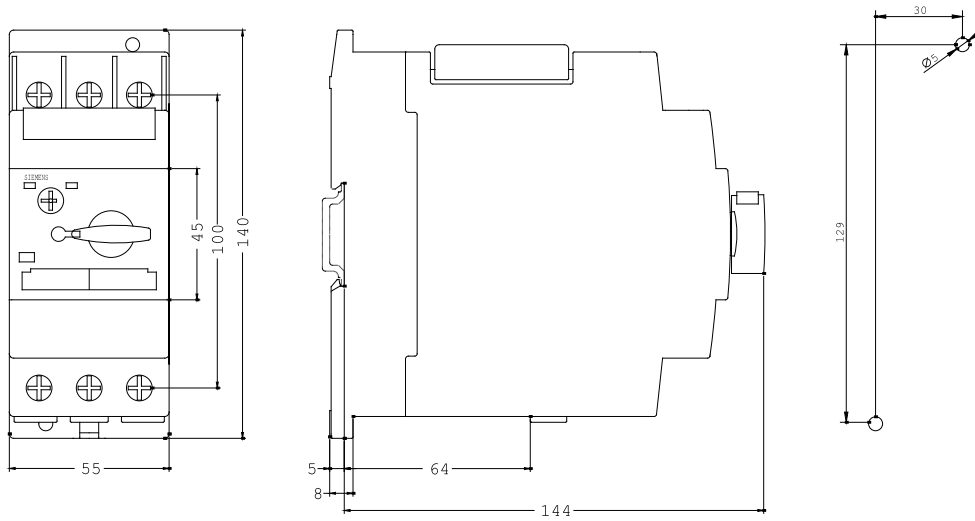

last change:

11/02/2006

Technical Assistance:

Telephone: +49 (0) 911-895-5900 (8°° - 17°° CET)

Fax: +49 (0) 911-895-5907

E-Mail: technical-assistance@siemens.com

Internet: www.siemens.de/lowvoltage/technical-assistance