

Miniature Fuse, 5 x 20 mm, Time-Lag T, H, 250 VAC, UL: 115 V - 300 VDC



IEC 60127-2 · 250VAC · 300VDC · Time-Lag T



Description

- IEC Standard Fuse
- H = High Breaking Capacity (Ceramic Tube)

Standards

- IEC 60127-2/5
- UL 248-14
- CSA C22.2 no. 248.14

Approvals

- Approval Reference Type: SPT 5x20
- VDE Certificate Number: 40014395
- UL File Number: E41599

Applications

- Primary Protection in Equipment
- Power Supply Adapter for e.g. laptops
- SMPS (Switching Mode Power Supply) for TV's and DVD's


References

Pigtail Type [SPT 5x20 Pigtail](#)
Fuse Kit [Fuse Kit SP 5x20 / SPT 5x20](#)

Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|------------------------------|--|
| Rated Voltage | 250VAC, 300VDC |
| Rated current | 0.5 - 16A |
| Breaking Capacity | 500A - 1500A |
| Characteristic | Time-Lag T |
| Admissible Ambient Air Temp. | -55 °C to 125 °C |
| Climatic Category | 55/125/21 acc. to IEC 60068-1 |
| Material: Tube | Ceramic |
| Material: Endcaps | Nickel-Plated Copper Alloy |
| Unit Weight | 1.16 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking |  , Rated current, Rated Voltage, Characteristic, Breaking Capacity, Approvals |

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


Dimension

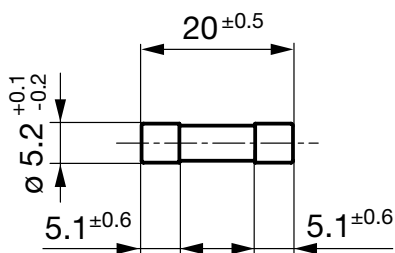

Pre-Arcing Time

| Rated Current I _n | 1.5 x I _n min. | 2.1 x I _n max. | 2.75 x I _n min. | 2.75 x I _n max. | 4.0 x I _n min. | 4.0 x I _n max. | 10.0 x I _n min. | 10.0 x I _n max. |
|------------------------------|---------------------------|---------------------------|----------------------------|----------------------------|---------------------------|---------------------------|----------------------------|----------------------------|
| 0.5 A - 0.8 A | 60 min | 30 min | 250 ms | 80 s | 50 ms | 5 s | 5 ms | 150 ms |
| 1 A - 3.15 A | 60 min | 30 min | 750 ms | 80 s | 95 ms | 5 s | 10 ms | 150 ms |
| 4 A - 6.3 A | 60 min | 30 min | 750 ms | 80 s | 150 ms | 5 s | 10 ms | 150 ms |
| 8 A - 10 A | 30 min | 30 min | 750 ms | 80 s | 150 ms | 5 s | 10 ms | 150 ms |
| 12.5 A - 16 A | 15 min | 30 min | 750 ms | 80 s | 150 ms | 5 s | 20 ms | 150 ms |

Time-Current-Curves

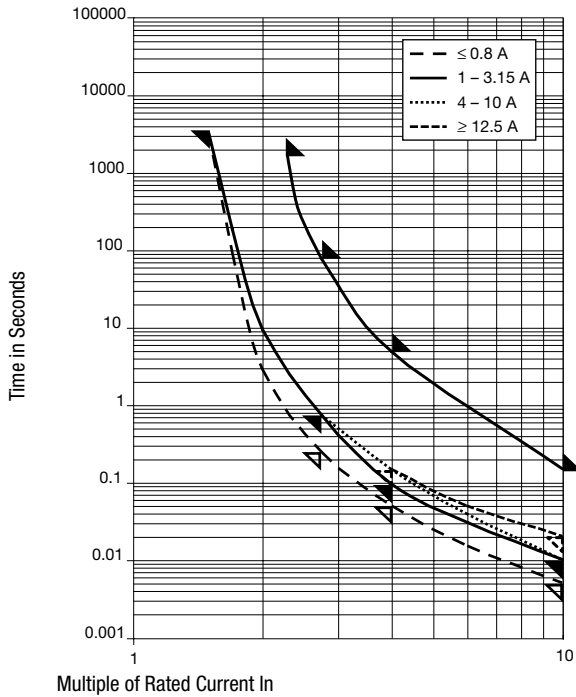







All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.5 I _n max. | Power Dissipation 1.5 I _n typ. [mW] | Melting I ² t 10.0 I _n typ. [A ² s] | | | | | | | | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|---|---|--|--|---|---|---|---|---|---|---|--------------|
| 0.5 | 250 | 300 | 1) | 850 | 360 | 1600 | 500 | 0.5 | ● | ● | | | | | | 0001.2501 |
| 0.63 | 250 | 300 | 1) | 650 | 330 | 1600 | 500 | 1.55 | ● | ● | | | | | | 0001.2502 |
| 0.8 | 250 | 300 | 1) | 500 | 260 | 1600 | 500 | 2.3 | ● | ● | | | | | | 0001.2503 |
| 1 | 250 | 300 | 1) | 350 | 180 | 2500 | 500 | 1.1 | ● | ● | ● | ● | ● | ● | ● | 0001.2504 |
| 1.25 | 250 | 300 | 1) | 300 | 150 | 2500 | 500 | 1.86 | ● | ● | ● | ● | ● | ● | ● | 0001.2505 |
| 1.6 | 250 | 300 | 1) | 200 | 130 | 2500 | 500 | 4.35 | ● | ● | ● | ● | ● | ● | ● | 0001.2506 |
| 2 | 250 | 300 | 1) | 190 | 120 | 2500 | 600 | 9.2 | ● | ● | ● | ● | ● | ● | ● | 0001.2507 |
| 2.5 | 250 | 300 | 1) | 180 | 100 | 2500 | 600 | 11.7 | ● | ● | ● | ● | ● | ● | ● | 0001.2508 |
| 3.15 | 250 | 300 | 1) | 140 | 100 | 4000 | 800 | 22 | ● | ● | ● | ● | ● | ● | ● | 0001.2509 |
| 4 | 250 | 150 | 2) | 100 | 90 | 4000 | 900 | 62.4 | ● | ● | ● | ● | ● | ● | ● | 0001.2510 |
| 5 | 250 | 150 | 2) | 100 | 90 | 4000 | 1200 | 97.5 | ● | ● | ● | ● | ● | ● | ● | 0001.2511 |
| 6.3 | 250 | 150 | 2) | 100 | 70 | 4000 | 1200 | 171 | ● | ● | ● | ● | ● | ● | ● | 0001.2512 |
| 8 | 250 | 150 | 3) | 100 | 70 | 4000 | 1300 | 268 | ● | ● | ● | ● | ● | ● | ● | 0001.2513 |
| 10 | 250 | 150 | 3) | 100 | 70 | 4000 | 2100 | 400 | ● | ● | ● | ● | ● | ● | ● | 0001.2514 |
| 12.5 | 250 | 125 | 4) | 100 | 70 | 4000 | 2500 | 563 | ● | ● | ● | ● | ● | ● | ● | 0001.2515 |
| 16 | 250 | 125 | 4) | 100 | 70 | 4000 | 3000 | 1500 | ● | ● | ● | ● | ● | ● | ● | 0001.2516 |

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.5 I _n max. | Power Dissipation 1.5 I _n typ. [mW] | Melting I ² t 10.0 Intyp. [A ² s] |       | Order Number |
|--|--------------------------|---------------------|-------------------|---|---|---|--|---|---|---|
| 1) IEC: H = 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 | | | | | | | | | | |
| 1) UL: 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 300 VDC | | | | | | | | | | |
| 2) IEC: H = 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 | | | | | | | | | | |
| 2) UL: 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 150 VDC | | | | | | | | | | |
| 3) IEC: 1000 A @ 250 VAC | | | | | | | | | | |
| 3) UL: 1000 A @ 250 VAC, 1500 A @ 150 VDC | | | | | | | | | | |
| 4) IEC: 500 A @ 250 VAC | | | | | | | | | | |
| 4) UL: 500 A @ 125 VAC, p.f. = 0.7 - 0.8 / 1000 A @ 125 VDC / 500 A @ 250 VAC / 1500 A @ 125 VDC | | | | | | | | | | |
| Packaging Unit | xxxx.xxxx xxxx.xxxx.G | | | | | | | | | Small Box Pack (10 pcs.) Bulk 128 x 91 x 60 mm (1000 pcs.) |