



MC34050 MC34051

Dual EIA-422/423 Transceivers

The MC34050/51 are dual transceivers which comply with EIA Standards EIA-422 (Balanced line) and EIA-423 (Unbalanced line). Each device contains two drivers and two receivers.

The MC34050 has a DRIVER ENABLE (for both drivers) and a RECEIVER ENABLE (for both receivers). Connecting the two ENABLES together provides Driver-to-Receiver switching from a single line.


The MC34051 has a DRIVER ENABLE for each driver. The two receivers are permanently enabled.

The Driver inputs, Receiver outputs, and Enable inputs are 74LS TTL compatible.

- Two Independent Drivers and Receivers Per Package
- 3-State Outputs
- Single 5.0 V Supply
- Internal Hysteresis (50 mV Typical) on Receivers
- Receivers Provide Fail-Safe Function. Output Stays High if Inputs are Open, Shorted (floating), or Terminated (floating)
- Receivers May Be Used in EIA-422 or 423 Systems
- Drivers Meet Full EIA-422 Standards


DUAL EIA-422/423 TRANSCEIVERS

SEMICONDUCTOR TECHNICAL DATA





D SUFFIX
PLASTIC PACKAGE
CASE 751B
(SO-16)


P SUFFIX
PLASTIC PACKAGE
CASE 648




PIN CONNECTIONS

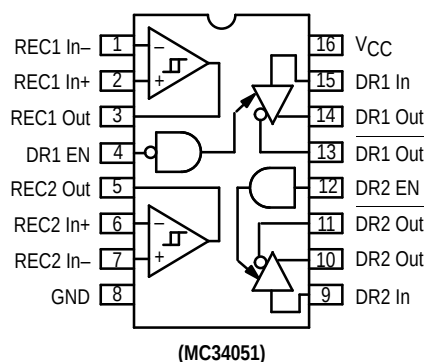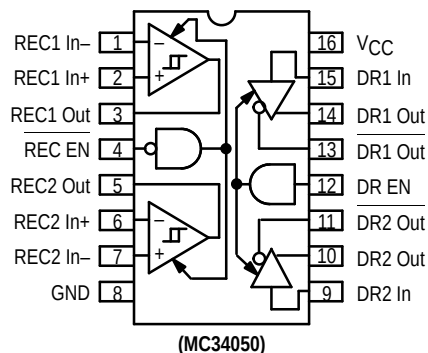

Receiver Block Diagram

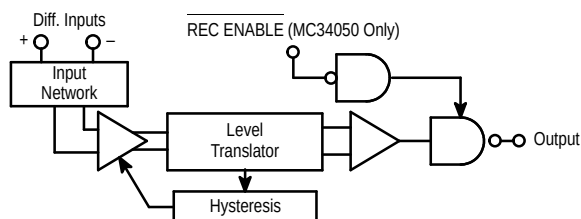

Driver Block Diagram

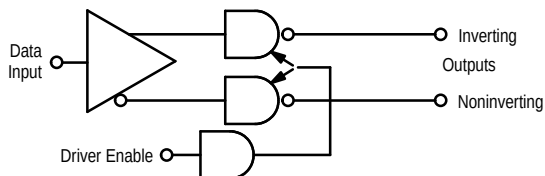

TRUTH TABLE

Driver				Receiver		
Data	EN	Inv. Out	Noninv. Out	Input	EN	Output
L	H	H	L	> + 0.2 V Diff.	L	H
H	H	L	H	< - 0.2 V Diff.	L	L
X	L	Z	Z	X	H	Z

ORDERING INFORMATION

Device	Operating Temperature Range	Package
MC34050D	$T_A = 0^\circ \text{ to } +70^\circ \text{C}$	SO-16
MC34050P		Plastic DIP
MC34051P		Plastic DIP
MC34051D		SO-16

MAXIMUM RATINGS

Rating	Value	Units
Power Supply Voltage (V_{CC})	7.0	Vdc
Input Common Mode Voltage (Receivers)	± 25	Vdc
Input Differential Voltage (Receivers)	± 25	Vdc
Output Sink Current (Receivers)	50	mA
Enable Input Voltage (Drivers and Receivers)	5.5	Vdc
Input Voltage (Drivers)	5.5	Vdc
Applied Output Voltage (3–State mode) – Receivers	-1.0 to $+7.0$	Vdc
Applied Output Voltage (3–State mode) – Drivers	-1.0 to $+7.0$	Vdc
Junction Temperature	-65 to $+150$	$^{\circ}\text{C}$
Storage Temperature	-65 to $+150$	$^{\circ}\text{C}$

Devices should not be operated at these values.

The "Recommended Operating Limits" provide for actual device operation.

RECOMMENDED OPERATING LIMITS

Characteristic	Min	Typ	Max	Unit
Power Supply Voltage	$+4.75$	$+5.0$	$+5.25$	Vdc
Input Common Mode Voltage (Receivers)	-7.0	–	$+7.0$	Vdc
Input Differential Voltage (Receivers)	-6.0	–	$+6.0$	Vdc
Enable Input Voltage (Drivers and Receivers)	0	–	$+5.25$	Vdc
Input Voltage (Drivers)	0	–	$+5.25$	Vdc
Ambient Temperature Range	0	–	$+70$	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, specifications apply for $4.75 < V_{CC} < 5.25$ V, and $0^{\circ} < T_A < 70^{\circ}\text{C}$).

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

DRIVERS

Input Voltage – Low	V_{ILD}	–	–	0.8	Vdc
Input Voltage – High	V_{IHD}	2.0	–	–	Vdc
Input Current @ $V_{IL} = 0.4$ V	I_{ILD}	-360	–	–	μA
Input Current @ $V_{IH} = 2.7$ V $V_{IH} = 5.25$ V	I_{IHD}	– –	– –	$+20$ $+100$	μA
Input Clamp Voltage ($I_{IK} = -18$ mA)	V_{IKD}	-1.5	–	–	Vdc
Output Voltage – Low ($I_{OL} = 20$ mA)	V_{OLD}	–	–	0.5	Vdc
Output Voltage – High ($I_{OH} = -20$ mA)	V_{OHD}	2.5	–	–	Vdc
Output Offset Voltage Difference (Note 1)	V_{OSD}	-0.4	–	$+0.4$	Vdc
Output Differential Voltage (Note 1)	V_T	2.0	–	–	Vdc
Output Differential Voltage Difference (Note 1)	V_{TD}	-0.4	–	$+0.4$	Vdc
Short Circuit Current ($V_{CC} = 5.25$ V) (From High Output, Note 2)	I_{OSD}	-150	–	-30	mA
Output Leakage Current – Hi–Z State ($V_{out} = 0.5$ V, DR EN = 0.8 V) ($V_{out} = 2.7$ V, DR EN = 0.8 V)	I_{OZD}	-100 -100	– –	$+100$ $+100$	μA
Output Leakage – Power Off ($V_{out} = -0.25$ V, $V_{CC} = 0$ V) ($V_{out} = 6.0$ V, $V_{CC} = 0$ V)	$I_{O(off)}$	-100 –	– –	– $+100$	μA

NOTES: 1. See EIA Standard EIA–422 and Figure 1 for exact test conditions.

2. Only one output in a package should be shorted at a time, for no longer than 1 second.

MC34050 MC34051

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, specifications apply for $4.75 < V_{CC} < 5.25$ V, and $0^\circ < T_A < 70^\circ\text{C}$).

Characteristic	Symbol	Min	Typ	Max	Unit
RECEIVERS					
Differential Input Threshold Voltage (Note 3) ($-7.0 \text{ V} < V_{ICM} < 7.0$, $V_{out} \geq 2.7 \text{ V}$) ($-7.0 \text{ V} < V_{ICM} < 7.0$, $V_{out} \leq 0.45 \text{ V}$)	V_{THR}	– –0.2	– –	+0.2 –	Vdc
Input Bias Current ($0 \leq V_{CC} \leq 5.25 \text{ V}$, $V_{in} = 15 \text{ V}$) ($0 \leq V_{CC} \leq 5.25 \text{ V}$, $V_{in} = -15 \text{ V}$)	I_{IBR}	– –2.8	– –	+2.3 –	mA
Input Balance and Output Level ($-7.0 \leq V_{ICM} \leq 7.0 \text{ V}$) ($V_{ID} = 0.4 \text{ V}$, $I_O = -400 \mu\text{A}$) ($V_{ID} = -0.4 \text{ V}$, $I_O = 8.0 \text{ mA}$)	V_{OHR} V_{OLR}	2.7 –	– –	– 0.45	Vdc
Output Leakage Current – 3-State (Pin 4 = 2.0 V, MC34050 only) ($V_{ID} = 3.0 \text{ V}$, $V_O = 0.4 \text{ V}$) ($V_{ID} = -3.0 \text{ V}$, $V_O = 2.4 \text{ V}$)	I_{OZR}	–100 –100	– –	+100 +100	μA
Output Short Circuit Current (Note 2, $V_{CC} = 5.25 \text{ V}$) ($V_{ID} = 3.0 \text{ V}$, MC34050 Pin 4 = 0.4 V, $V_O = 0 \text{ V}$)	I_{OSR}	–85	–	–15	mA

ENABLES

Input Voltage – Low	V_{ILE}	–	–	0.8	Vdc
Input Voltage – High	V_{IHE}	2.0	–	–	Vdc
Input Current @ $V_{IL} = 0.4 \text{ V}$ (Receiver EN) (Driver EN)	I_{ILER} I_{ILED}	–100 –360	– –	– –	μA
Input Current @ $V_{IH} = 2.7 \text{ V}$ $V_{IH} = 5.25 \text{ V}$	I_{IHE}	– –	– –	+20 +100	μA
Input Clamp Voltage ($I_{IK} = -18 \text{ mA}$)	V_{IKE}	–1.5	–	–	Vdc

POWER SUPPLY

Power Supply Current @ $V_{CC} = 5.25 \text{ V}$	I_{CC}	–	55	80	mA
--	----------	---	----	----	----

NOTES: 2. Only one output in a package should be shorted at a time, for no longer than 1 second.
3. Differential input threshold voltage and guaranteed output levels are done simultaneously for worst case.

DRIVER SWITCHING CHARACTERISTICS ($V_{CC} = 5.0 \text{ V}$, $T_A = 25^\circ\text{C}$, see Figure 2).


Characteristic	Symbol	Min	Typ	Max	Unit
Propagation Delay					ns
Data Input to Output High-to-Low	t_{PHLD}	–	–	20	
Data Input to Output Low-to-High	t_{PLHD}	–	–	20	
Output Skew ($ t_{PHL} - t_{PLH} $ each driver)	t_{SKD}	–	–	8	
Enable Input to Output					
$C_L = 10 \text{ pF}$, $R_L = 75 \Omega$ to Gnd	t_{PHZD}	–	–	30	
$C_L = 10 \text{ pF}$, $R_L = 180 \Omega$ to V_{CC}	t_{PLZD}	–	–	35	
$C_L = 30 \text{ pF}$, $R_L = 75 \Omega$ to Gnd	t_{PZHD}	–	–	40	
$C_L = 30 \text{ pF}$, $R_L = 180 \Omega$ to V_{CC}	t_{PZLD}	–	–	45	
Maximum Data Input Transition Time (10% to 90%)	t_{TRD}	–	50	–	ns

RECEIVER SWITCHING CHARACTERISTICS ($V_{CC} = 5.0 \text{ V}$, $T_A = 25^\circ\text{C}$, see Figure 3).

Characteristic	Symbol	Min	Typ	Max	Unit
Propagation Delay					ns
Differential Input to Output – High-to-Low	t_{PHLR}	–	–	30	
Differential Input to Output – Low-to-High	t_{PLHR}	–	–	30	
Enable Input – Output Low to 3-State	t_{PLZR}	–	–	35	
Enable Input – Output High to 3-State	t_{PHZR}	–	–	35	
Enable Input – Output 3-State to High	t_{PZHR}	–	–	30	
Enable Input – Output 3-State to Low	t_{PZLR}	–	–	30	

MC34050 Only

Figure 1. Driver Output Test Circuit




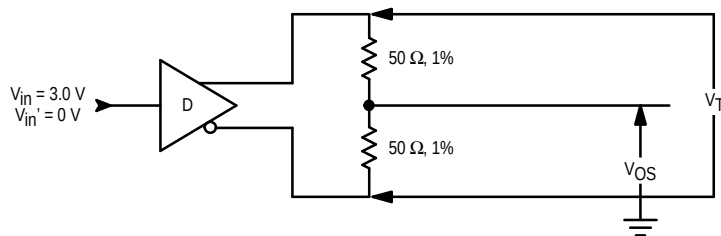


$$V_{OSD} = |V_{OS} - V_{OS'}|;$$

$$V_{ODD} = |V_T| - |V_T'|$$





Circuit per EIA-422-A, Dec. 1978

Figure 2. Driver Switching Test Circuits

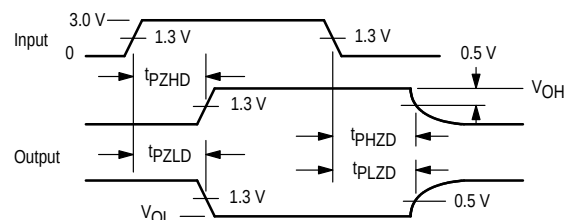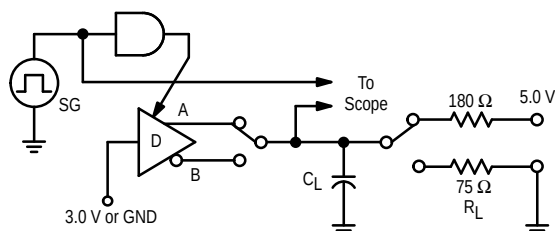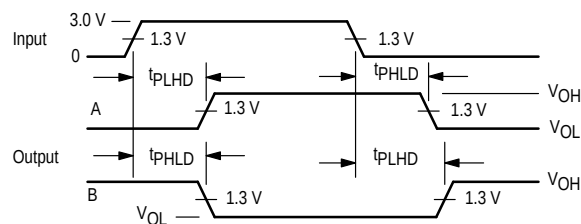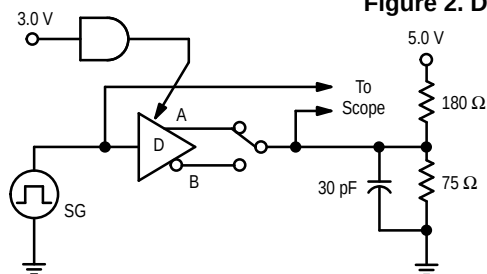

SG: 1.0 MHz, 50% duty cycle, t_R , t_F = 6.0 ns (10% to 90%)
 R_L = 75 Ω to GND for t_{PZH} and t_{PHZ} ; 180 Ω to V_{CC} for t_{PLZ} and t_{PHL} ;
 C_L = 10 pF for t_{PHZ} and t_{PLZ} ; 30 pF for t_{PZH} and t_{PLH} .

Figure 3. Receiver Switching Test Circuits

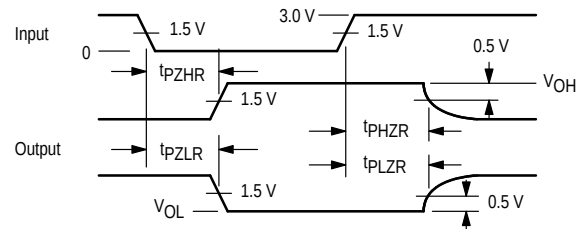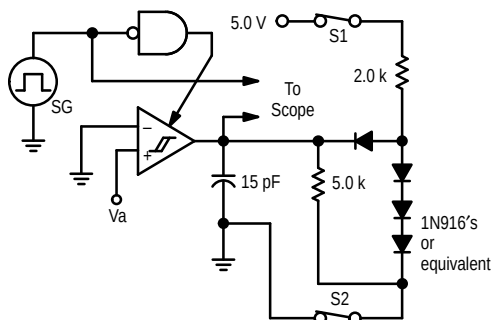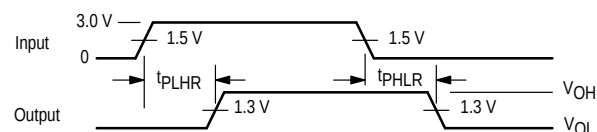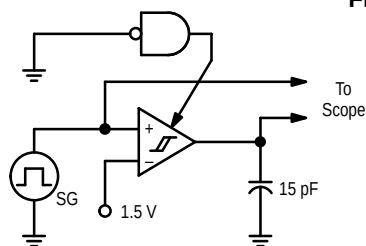

MC34050 Only

SG: 1.0 MHz, 50% duty cycle, t_R , t_F = 6.0 ns (10% to 90%)
 V_a = +1.5 V for t_{PHZ} , t_{PZH} ; V_a = -1.5 V for t_{PLZ} , t_{PLH} .
 S_1 , S_2 closed for t_{PHZ} , t_{PLZ} ; S_1 open, S_2 closed for t_{PZH} ; S_1 closed, S_2 open for t_{PLH} .

Figure 4. Driver Input Characteristics

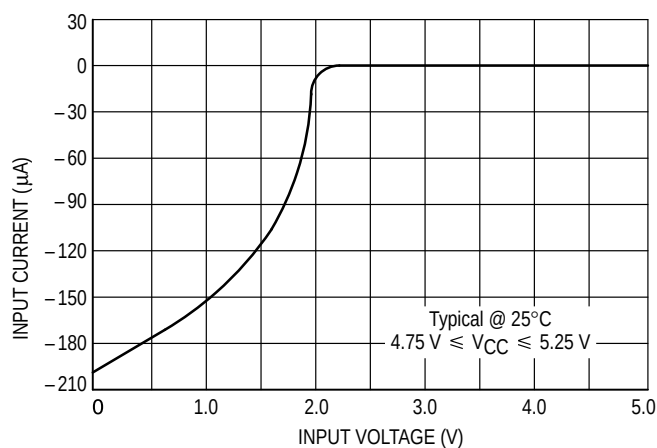


Figure 5. Driver Differential Output Characteristics

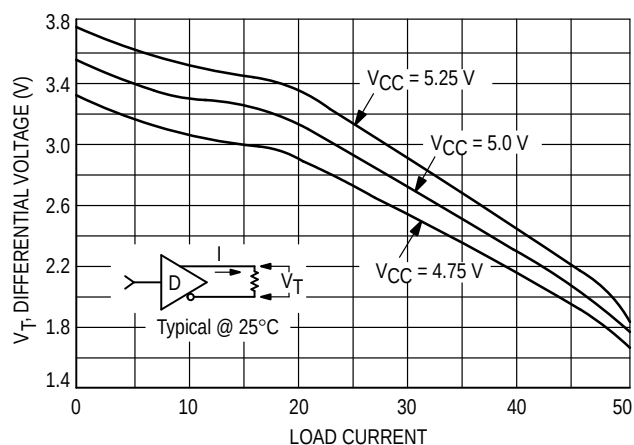


Figure 6. Driver Output Voltage

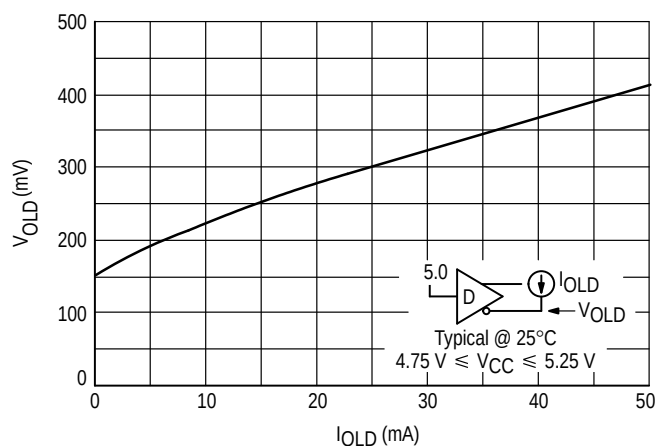


Figure 7. Driver Output Voltage

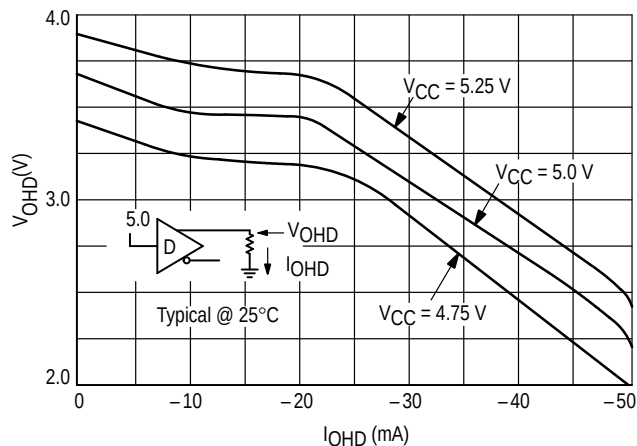


Figure 8. Receiver Output Voltage

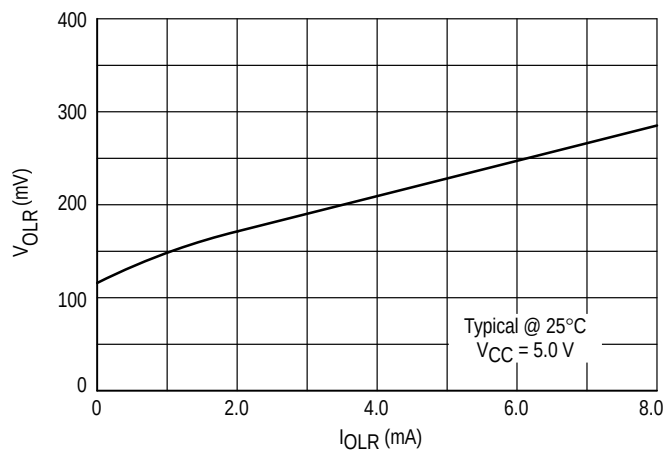


Figure 9. Receiver Output Voltage

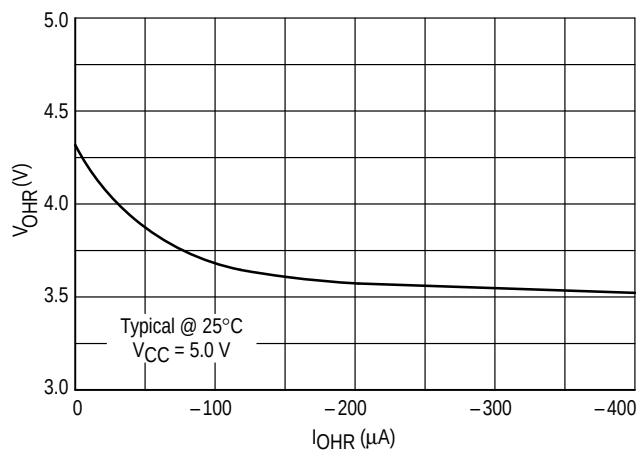


Figure 10. Receiver Input Characteristics

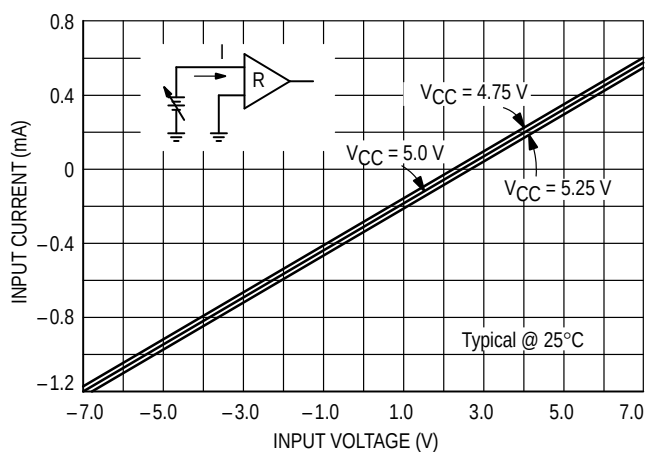


Figure 11. Enable Input Characteristics

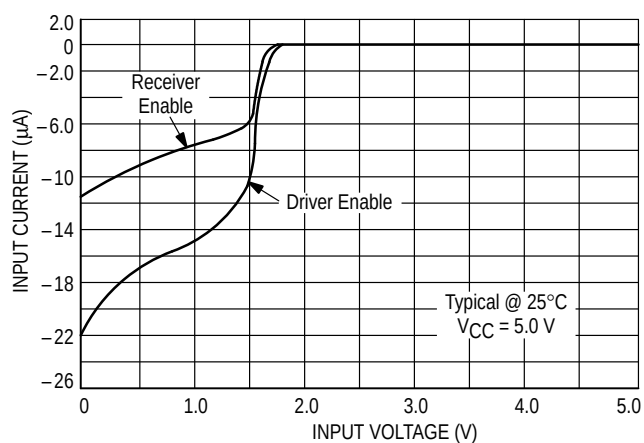


Figure 12. Receiver Input Characteristics

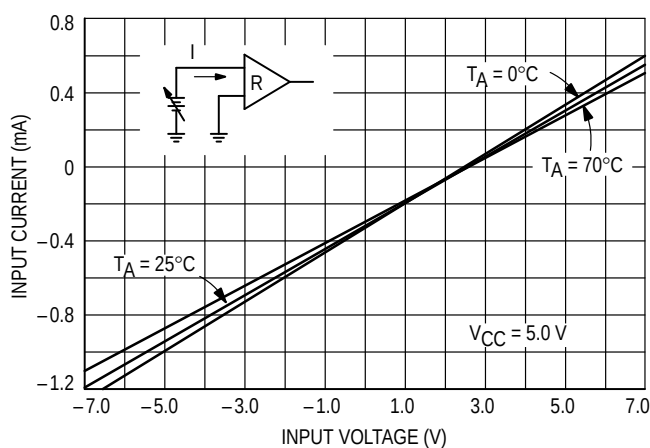


Figure 13. Receiver Output Leakage

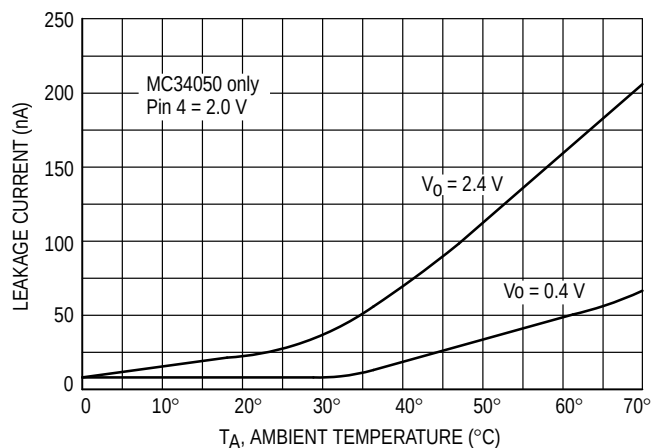


Figure 14. Driver Output Voltage


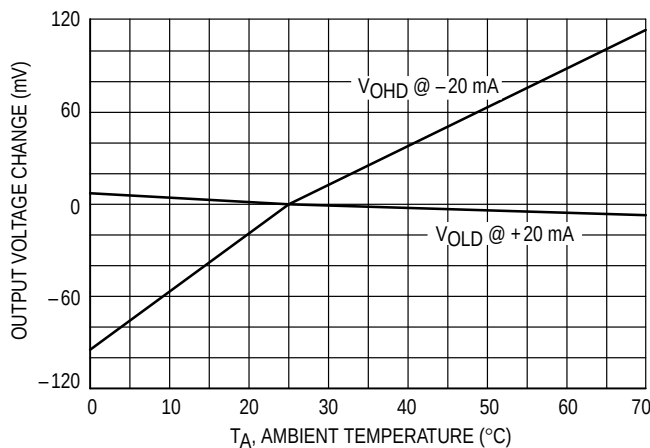


Figure 15. Driver Output Leakage

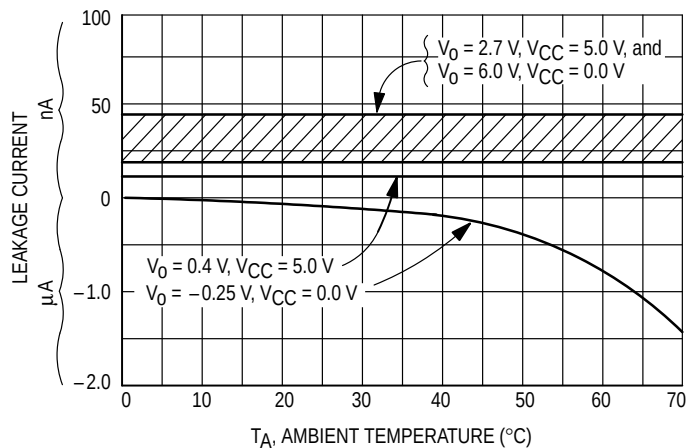

MC34050 MC34051

Figure 16. EIA-422 Application


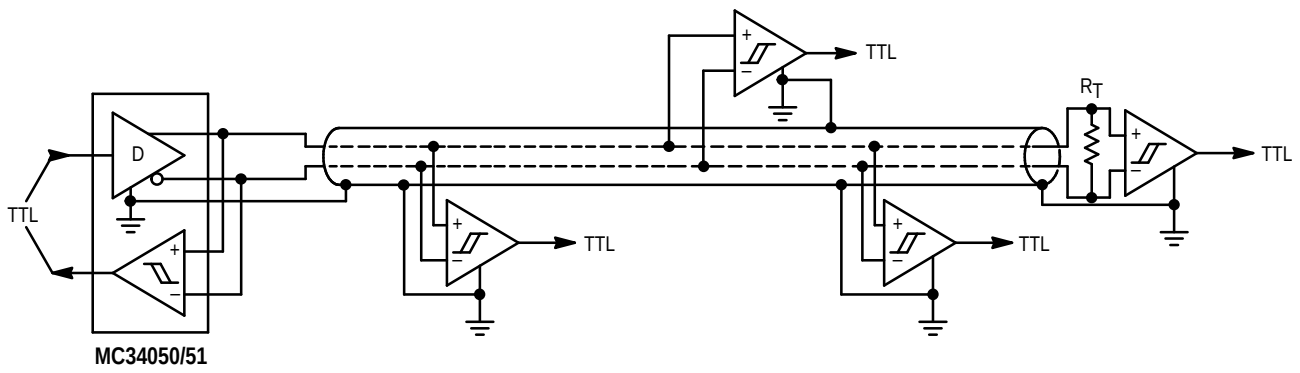



Figure 17. EIA-423 Application

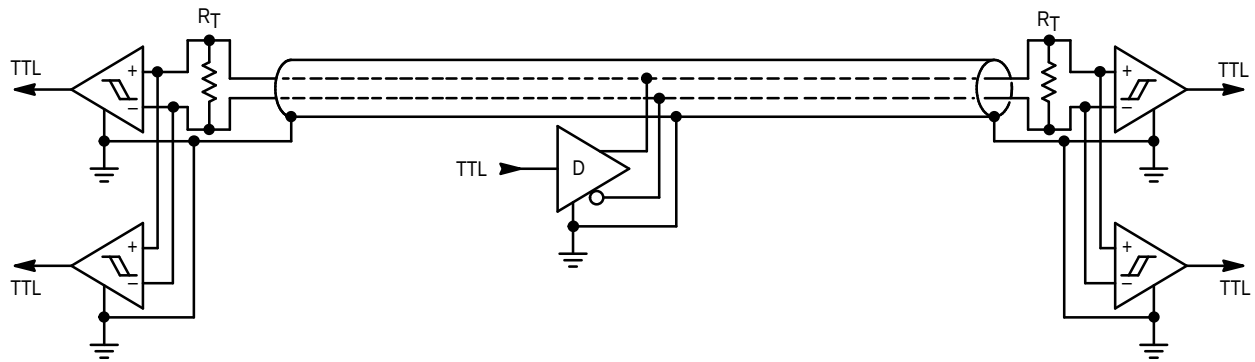

MC34050 MC34051

OUTLINE DIMENSIONS


D SUFFIX PLASTIC PACKAGE CASE 751B-05 (SO-16) ISSUE J

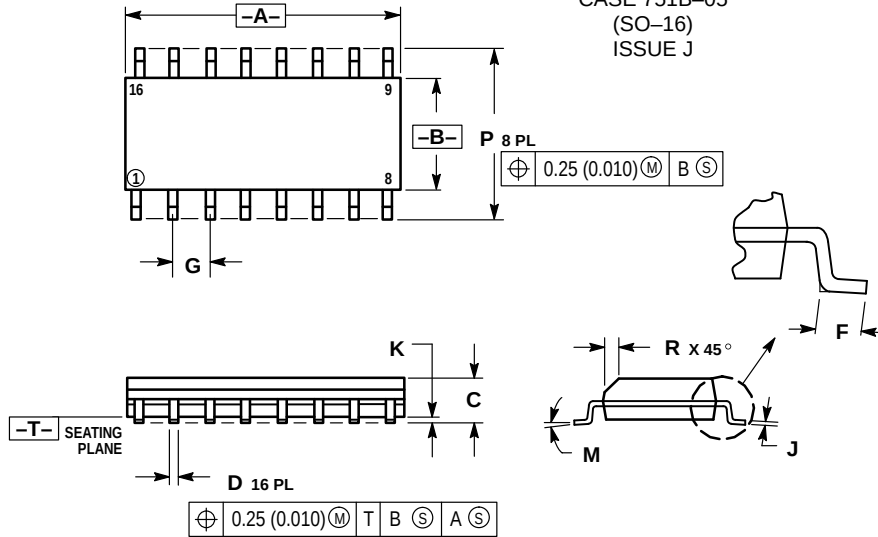

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.80	10.00	0.386	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

P SUFFIX PLASTIC PACKAGE CASE 648-08 ISSUE R

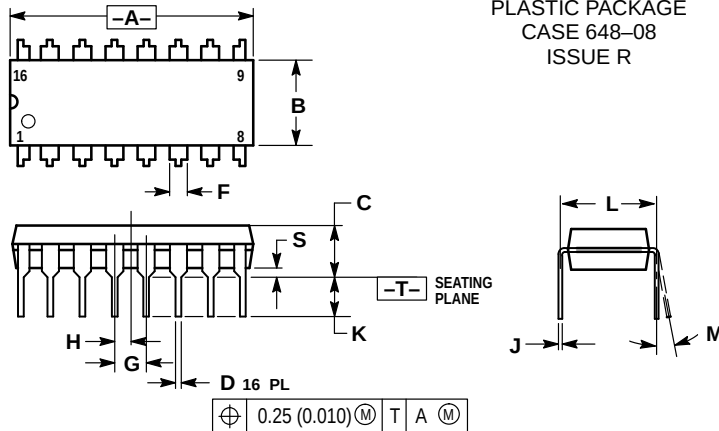

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
 4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
 5. ROUNDED CORNERS OPTIONAL.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.740	0.770	18.80	19.55
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.021	0.39	0.53
F	0.040	0.70	1.02	1.77
G	0.100 BSC		2.54 BSC	
H	0.050 BSC		1.27 BSC	
J	0.008	0.015	0.21	0.38
K	0.110	0.130	2.80	3.30
L	0.295	0.305	7.50	7.74
M	0°	10°	0°	10°
S	0.020	0.040	0.51	1.01

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609
INTERNET: http://Design-NET.com

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MC34050/D

