



## The MiCS-VZ-89TE is an integrated sensor board for Indoor Air Quality monitoring.


The MiCS-VZ-89TE combines state-of-the-art MOS sensor technology with intelligent detection algorithms to monitor tVOCs and CO<sub>2</sub> equivalent variations in confined spaces, e.g. meeting rooms or vehicle cabins. The dual signal output can be used to control ventilation on-demand, saving energy and reducing cost-of-ownership.

### Features

- Calibration-free
- Low power
- Wide VOCs detection range
- High sensitivity
- High resistance to shocks and vibrations

### Detectable gases

- Volatile Organic Compounds VOCs
- Equivalent Carbon Dioxide CO<sub>2</sub>(equiv)




For more information please contact:


[Info.em@sgxsensortech.com](mailto:Info.em@sgxsensortech.com)

SGX Sensortech, Courtils 1  
CH-2035 Corcelles-Cormondrèche  
Switzerland


[www.sgxsensortech.com](http://www.sgxsensortech.com)

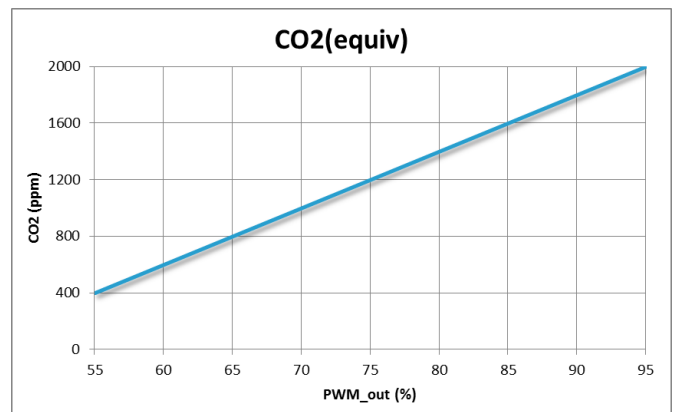

Conversion from PWM output signal of MICS-VZ-89TE to equivalent Carbon Dioxide concentration in ppm

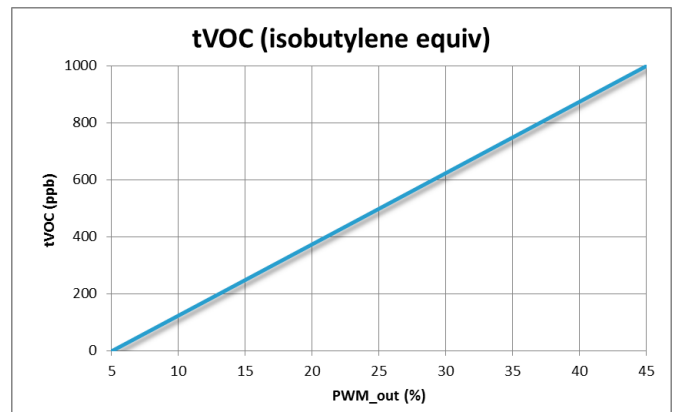

Conversion from PWM output signal of MICS-VZ-89TE to equivalent tVOC concentration in ppb

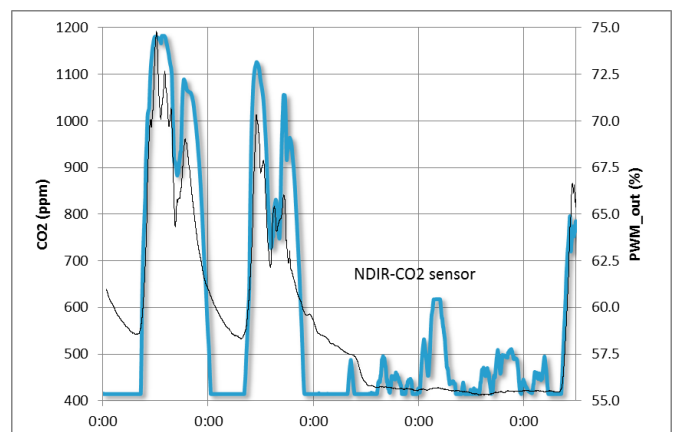

Comparison between MICS-VZ-89TE output signal and NDIR CO<sub>2</sub> sensor signal over a duration of 4 consecutive days (Thu – Sun)

## Performance

Detection Method	Semiconductor gas sensor, detecting a wide range of VOCs
Monitoring Range	400-2000 ppm equivalent CO2 0-1000 ppb isobutylene equivalent tVOCs
PWM Output	Pin 1 : TTL output 30Hz +/-1%, Range 5...95%, duty cycle 3.3V Use a pull-up resistance between Pin 1 and Pin 6 Pull-up value: typ. 10kOhms for 3.3V operation
I2C Output	Pin 2 and 4 : Pull-up of 4.7 kOhms on master SDA and SCL
Response Time	Equivalent to conventional NDIR-CO2 sensors < 5 seconds for tVOC
Refresh Output Frequency	1 Hz

## Operation

Supply Voltage	3.3V DC regulated +/- 5%
Operating Power	125 mW
Warm-up Time	15 min
Operating Temperature	0°C to 50°C
Operating Humidity	0%RH to 95%RH (non condensing)
Storage Temperature	-40°C to 80°C
Storage Humidity	0%RH to 95%RH (non condensing)

### IMPORTANT PRECAUTIONS

Read the following instructions carefully before using the indoor air quality sensor described in this document to avoid erroneous readings and to prevent the device from permanent damage.

- The sensor must not be exposed to **high concentrations** of organic solvents, ammonia, silicone vapour or cigarette-smoke in order to avoid poisoning the sensitive layer.
- The sensor should be protected against water and dust projections.
- SGX strongly recommends using ESD protection equipment to handle the sensor.
- For any additional questions, contact SGX Sensortech