


Ordering information

Electromechanical relay (EMR)

Example: 34 series slim electromechanical relay, 1 CO (SPDT) 6 A contacts, 24 V sensitive DC coil.

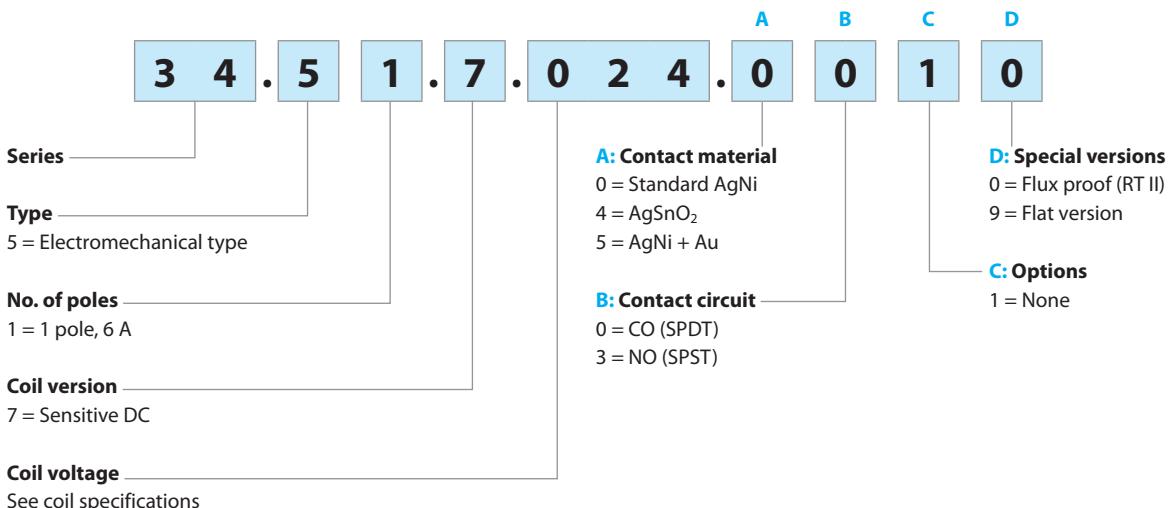


Selecting features and options: only combinations in the same row are possible.

Preferred selections for best availability are shown in **bold**.



Type	Coil version	A	B	C	D
34.51	sens. DC	0 - 4 - 5	0 - 3	1	0
34.51	sens. DC	0 - 4 - 5	0	1	9

Solid state relay (SSR)

Example: 34 series SSR relay, 2 A output, 24 V DC supply.

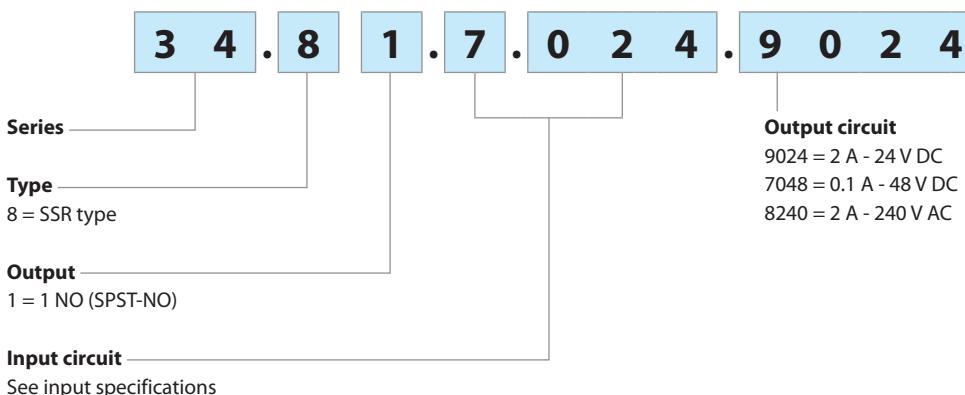


Flat pack version

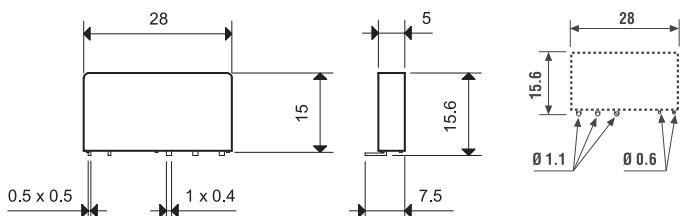

Copper side view

Option = 34.51.7xxx.x019

Environmental protection RT I



Electromechanical relay

Technical data


A

Insulation according to EN 61810-1


Nominal voltage of supply system	V AC	230/400
Rated insulation voltage	V AC	250
Pollution degree		3 2
Insulation between coil and contact set		
Type of insulation	Reinforced	
Overvoltage category	III	
Rated impulse voltage	kV (1.2/50 µs)	6
Dielectric strength	V AC	4000
Insulation between open contacts		
Type of disconnection	Micro-disconnection	
Dielectric strength	V AC/kV (1.2/50 µs)	1000/1.5
Conducted disturbance immunity		
Burst (5...50)ns, 5 kHz, on A1 - A2	EN 61000-4-4	level 4 (4 kV)
Surge (1.2/50 µs) on A1 - A2 (differential mode)	EN 61000-4-5	level 3 (2 kV)
Other data		
Bounce time: NO/NC	ms	1/6
Vibration resistance (5...55)Hz: NO/NC	g	10/5
Shock resistance	g	20/14
Power lost to the environment	without contact current W	0.2
	with rated current W	0.5
Recommended distance between relays mounted on PCB	mm	≥ 5

Contact specification

F 34 - Electrical life (AC) v contact current

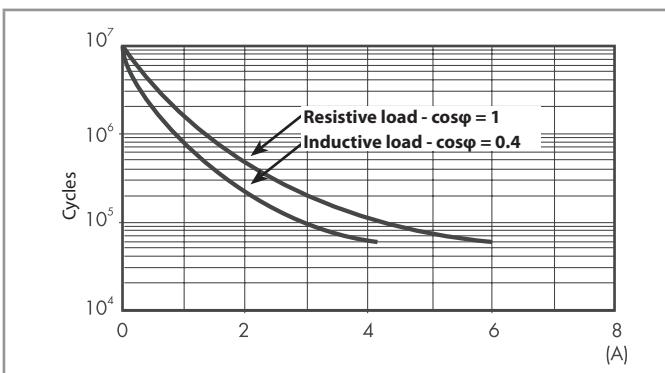

H 34 - Maximum DC1 breaking capacity

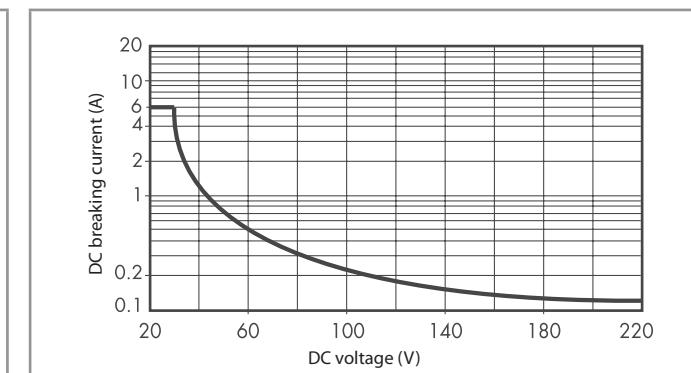


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 60 \cdot 10^3$ can be expected.
 - In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
- Note: the release time for the load will be increased.

Coil specifications

DC coil data

Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
		U_{min}	U_{max}		
5	7.005	3.5	7.5	130	38.4
12	7.012	8.4	18	840	14.2
24	7.024	16.8	36	3350	7.1
48	7.048	33.6	72	12300	3.9
60	7.060	42	90	19700	3

R 34 - DC coil operating range v ambient temperature

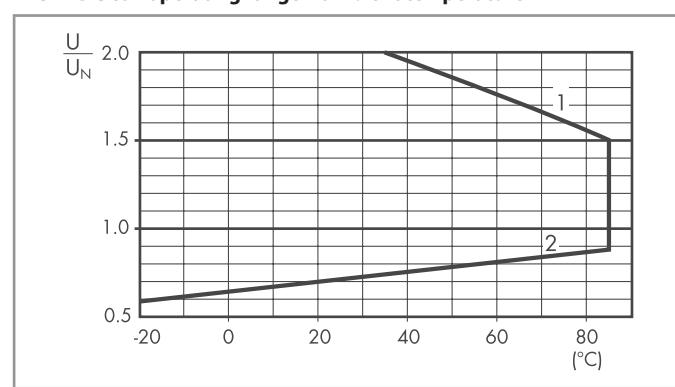

1 - Max. permitted coil voltage.

2 - Min. pick-up voltage with coil at ambient temperature.