

**Applicable Sockets**

**Part Numbers: Sockets**

Relay	Standard DIN Rail Mount	Finger-Safe DIN Rail Mount	Panel Mount	PC Mount
<b>RY2S</b> <b>RY22S</b>	SY2S-05	SY2S-05C	SY2S-51	SY2S-61
<b>RM2</b>	SM2S-05	SM2S-05C	SM2S-51	SY4S-61 SY4S-62
<b>RY4S</b> <b>RY42S</b>	SY4S-05	SY4S-05C	SY4S-51	

Springs (optional)	
Part Number	Use With
SY2S-02F1③ SFA-101① SFA-202②	SY2S-05, -05C
SFA-301① SFA-302② SY4S-51F1③	SY2S-51, -61
SY4S-02F1③ SFA-101① SFA-202②	SY2S-05, -05C
SFA-301① SFA-302② SY4S-51F1③	SY4S-51, -61



See Section F for details on sockets. All DIN rail mount sockets shown above can be mounted using DIN rail BNDN1000.



- ① Top latch
- ② Side latch
- ③ Pullover spring

**E**

Relays

**Internal Circuits**








Image as viewed from bottom of relay. Refer to socket for exact wiring layout (Section F).

## Maximum Switching Capacity


**RY4/RM2**

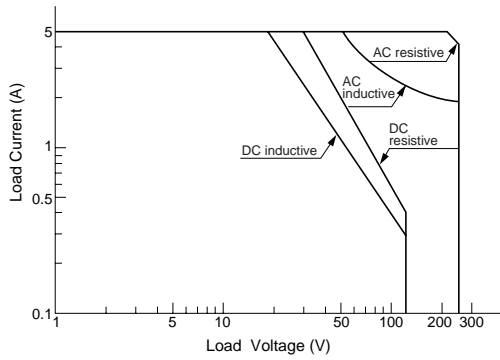

**RY2**


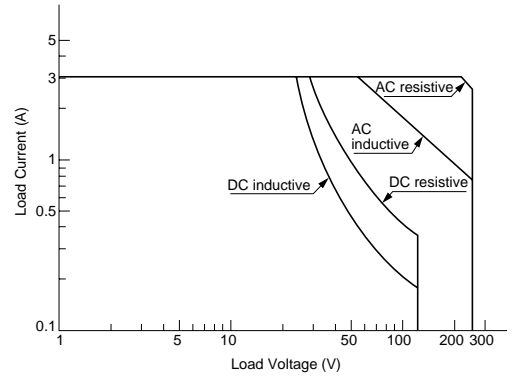


**RY Bifurcated**


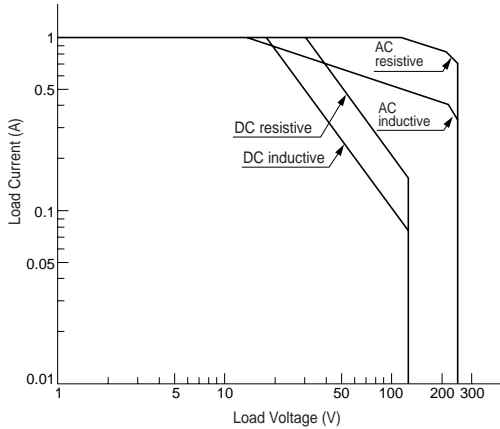


## Electrical Life Curves



**RY2**

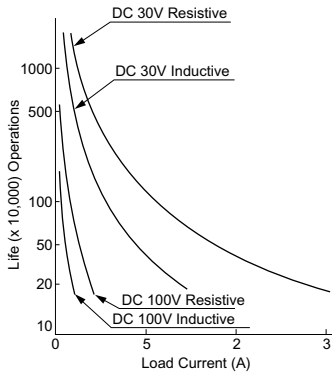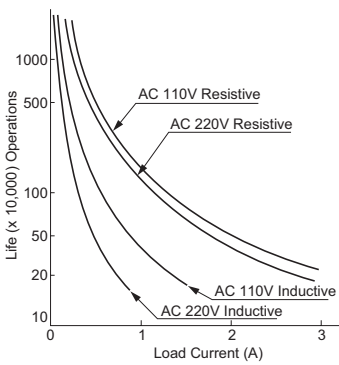

**Bifurcated Contacts RY42, RY22**

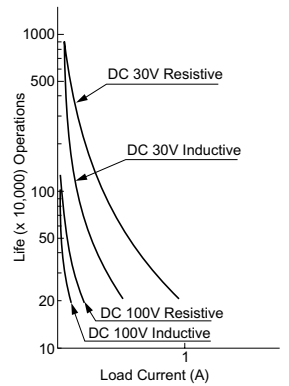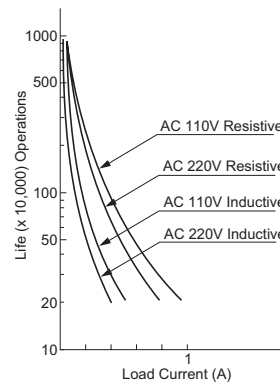

**RY4**

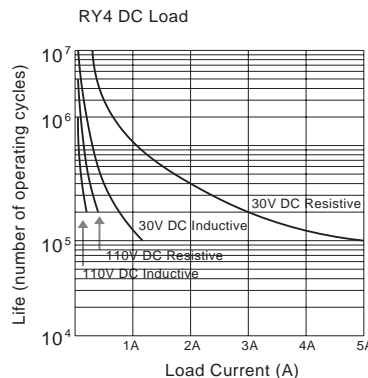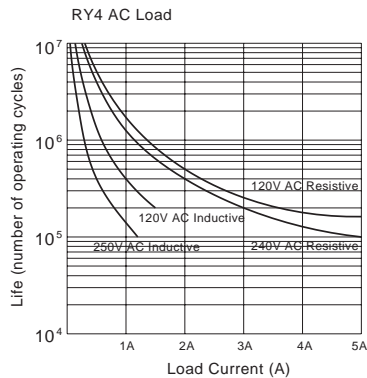

**RM2**

