

**Keyword:**  
**Lithium Xtra - Enhanced Start**

**Model:** SL-760

**Performance Data** **Size AA**  
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl <sub>2</sub>
Nominal voltage	3.6 V
Nominal capacity	2.2 Ah
Nominal current	2 mA
Max. continuous discharge current	60 mA
Pulse current capability	140 mA
Anode surface area	14 cm <sup>2</sup>
Lithium content	0.65 g
Weight	18 g
Volume	8 cm <sup>3</sup>
Temperature range	-55...+85°C

**WARNING:**  
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100°C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


**Typical Discharge Curves at +25°C**

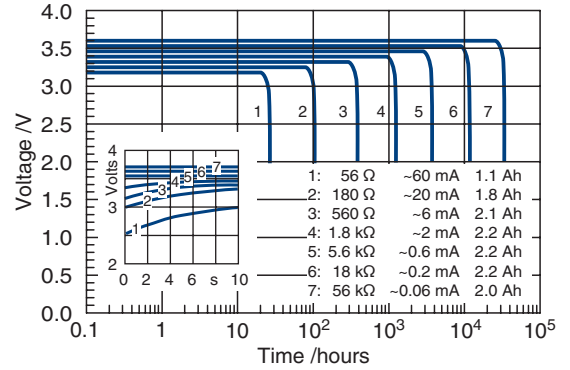



**Available Capacity**

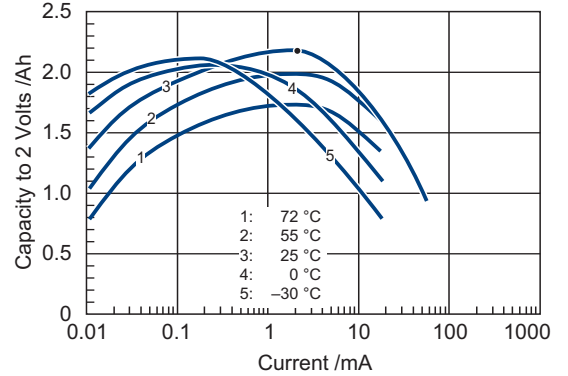

**Operating Voltage**

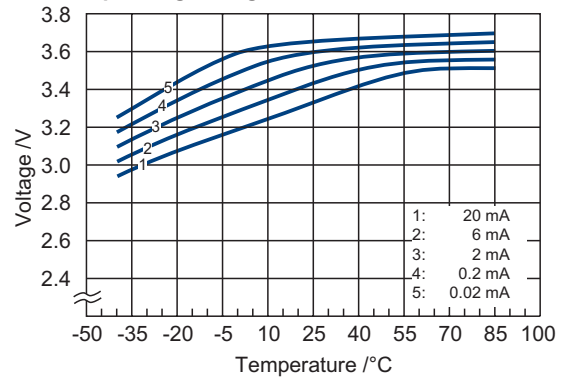

**Pulse Discharge Characteristics at +25°C**

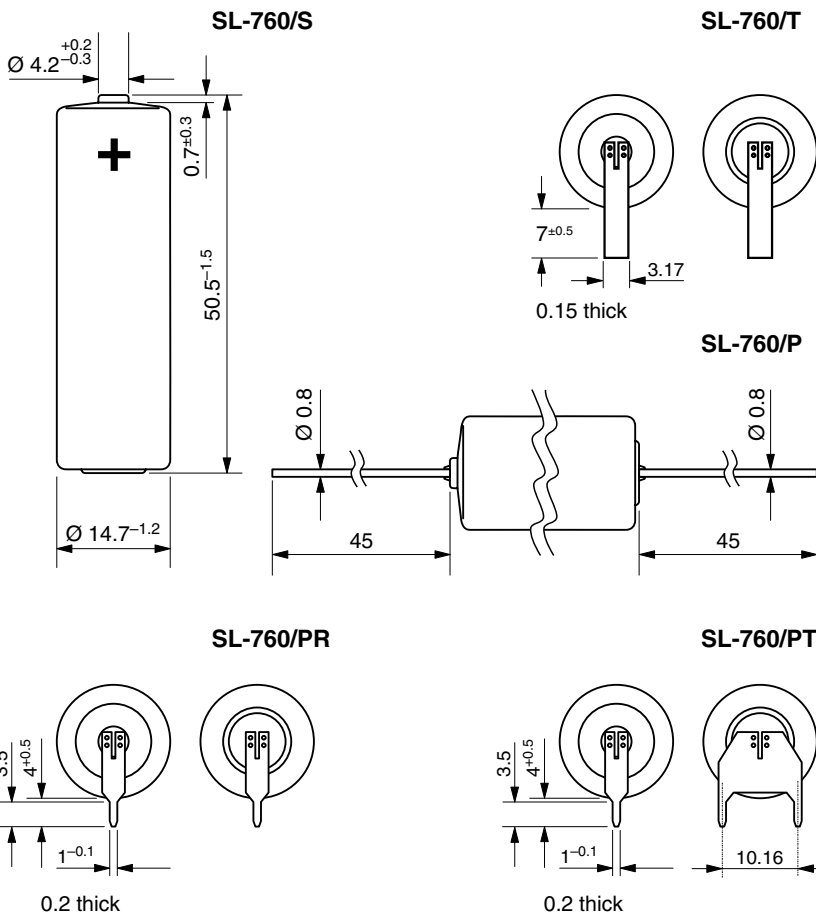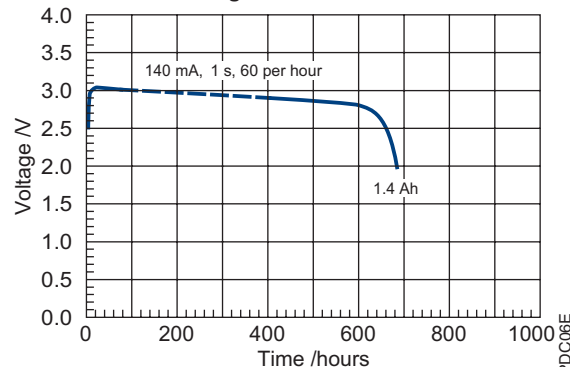

**Available Terminations**

SL-760/S	Standard
SL-760/T	Tags
SL-760/P	Pins
SL-760/PR	Pins Radial
SL-760/PT	Polarized Tags

**Catalogue No.**

11 1 07601 00
11 1 07602 00
11 1 07603 00
11 1 07606 00
11 1 07608 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.