

MODEL TLH-5930


International size reference: D, ER32L615

TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)




| | |
|--|-------------------|
| ■ Nominal capacity @ 4 mA, to 2 V | 17 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 230 mA |
| ■ Maximum pulse current capability | 500 mA |
| ■ Weight | 93 g (3.28 oz) |
| ■ Volume | 51 cc |
| ■ Operating temperature range | -55 °C to +125 °C |
| ■ Li metal content | approx. 5 g |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN LITHIUM BATTERIES

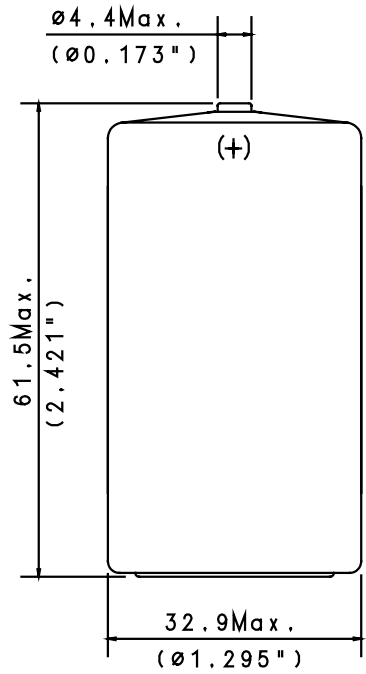

TERMINATIONS & ORDERING NO.

| | |
|------------------------|---------------|
| SUFFIX- /S STANDARD | 15-5930-21505 |
| SUFFIX- /T SOLDER TABS | 15-5930-31505 |

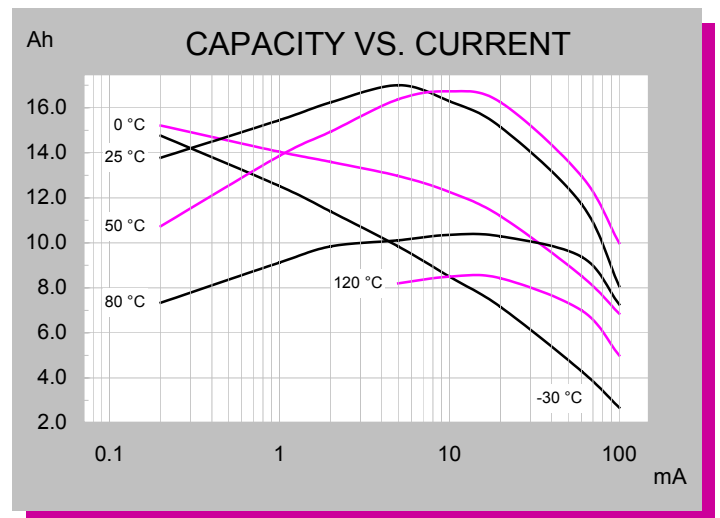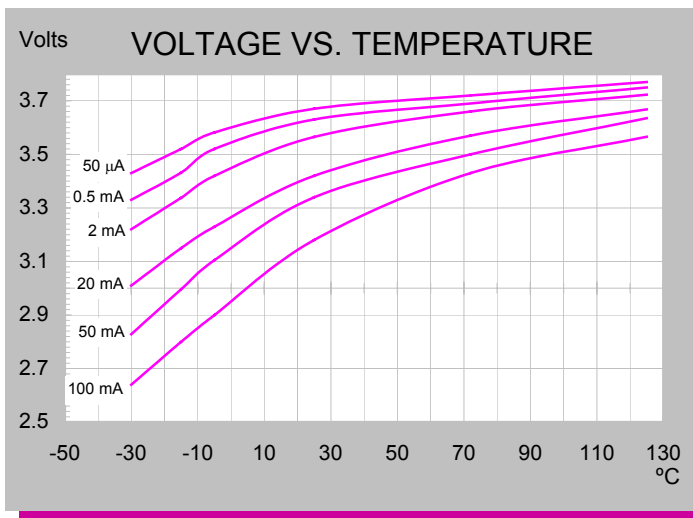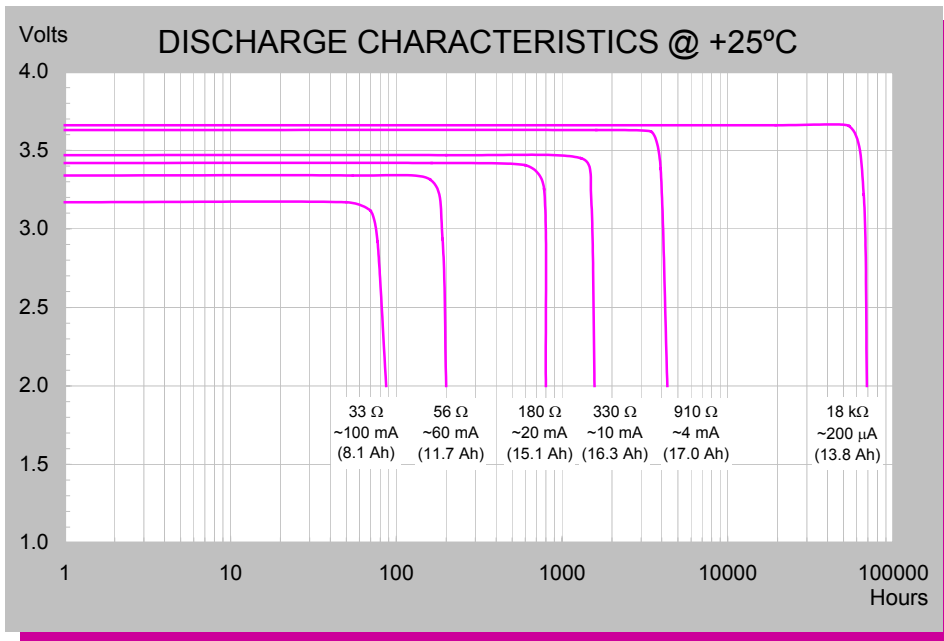

Extended Temperature Range

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.