


Data sheet | Item number: 787-2850

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage;
1.25 A output current


www.wago.com/787-2850

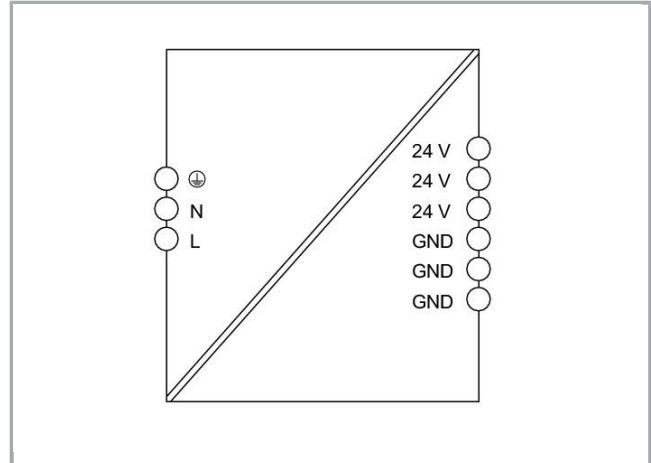

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

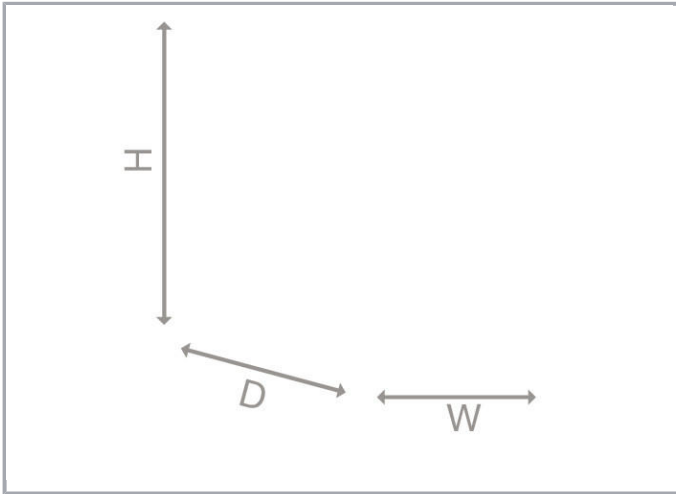

Item description

Features:

- Stepped profile for installation in standard distribution boards
- Connection technology with Push-in CAGE CLAMP®
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN/UL 61010-1 or EU/UL 61010-2-201

Data

Technical Data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	AC 110 ... 240 V
Input voltage range	AC 100 ... 264 V
Nominal mains frequency range	47 ... 63 Hz
Input current I_i	$\leq 0,55$ A (110 VAC); $\leq 0,33$ A (240 VAC)
Inrush current	≤ 24 A (NTC)
Mains failure hold-up time	≥ 95 ms (230 VAC)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Nominal output current $I_{o\text{ nom}}$	1,25 A (24 VDC)
Nominal output power	30 W

Subject to changes. Please also observe the further product documentation!