

Axial Lead and Cartridge Fuses

Midget

AC/DC Fast-Acting Type KLKD Series



Fast-acting fuses designed for use in circuits with DC fault currents up to 10,000 amperes. Same AC interrupting ratings as KLK series.

ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Ampere Rating	Opening Time
135%	1/10–30	1 hour, Maximum
200%	1/10–30	2 minutes, Maximum

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA from 3/10 through 30 amperes.

INTERRUPTING RATINGS:

10,000 amperes at 600 VDC.


100,000 amperes (capable of 200,000) at 600VAC.

FUSES TO MIL SPEC: See **KLK Series** for QPL fuses with DC ratings.


PATENTED

ORDERING INFORMATION:

Cartridge Catalog Number	Ampere Rating	AC Voltage Rating	Nominal Resistance Cold Ohms
KLK D .100	.100	600	85.5
KLK D .125	.125	600	65.0
KLK D .200	.200	600	30.9
KLK D .250	.250	600	22.0
KLK D .300	.300	600	16.2
KLK D .500	.500	600	8.16
KLK D .750	.750	600	.402
KLK D 001.	1	600	.252
KLK D 01.5	1.5	600	.134
KLK D 002.	2	600	.124
KLK D 02.5	2.5	600	.0989
KLK D 003.	3	600	.0773
KLK D 03.5	3.5	600	.0613
KLK D 004.	4	600	.0511
KLK D 005.	5	600	.0363
KLK D 006.	6	600	.0261
KLK D 007.	7	600	.0205
KLK D 008.	8	600	.0194
KLK D 009.	9	600	.0166
KLK D 010.	10	600	.0128
KLK D 012.	12	600	.0103
KLK D 015.	15	600	.0078
KLK D 020.	20	600	.0045
KLK D 025.	25	600	.00329
KLK D 030.	30	600	.002816

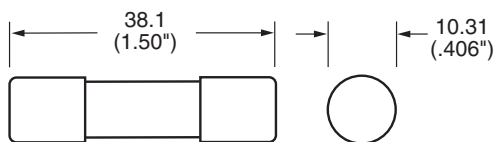

Average Time Current Curves

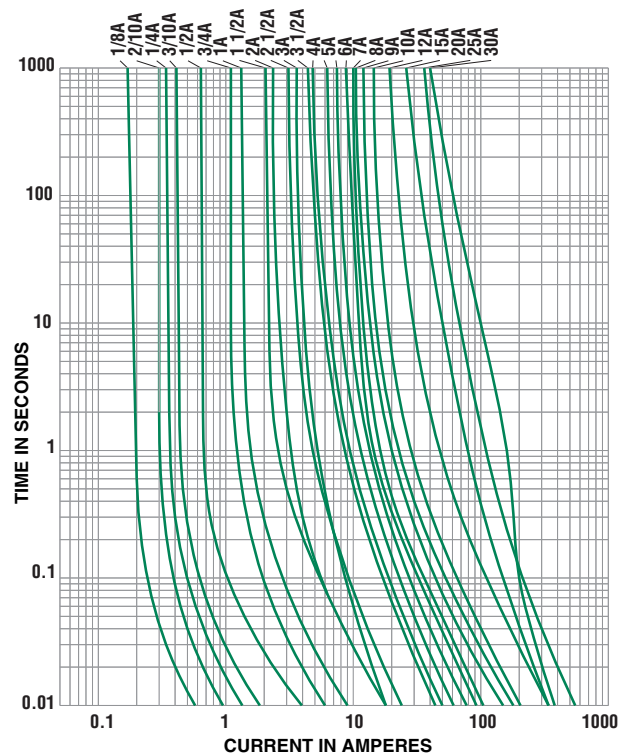

AXIAL LEAD AND CARTRIDGE FUSES