

		max	V	575
AC operating voltage				
	of 50/60Hz coil powered at 50Hz			
	pick-up	min	%Us	75
		max	%Us	115
	drop-out	min	%Us	20
		max	%Us	55
<hr/>				
	of 50/60Hz coil powered at 60Hz			
	pick-up	min	%Us	80
		max	%Us	115
	drop-out	min	%Us	20
		max	%Us	55
<hr/>				
AC operating voltage at 20°C				
	of 50/60Hz coil powered at 50Hz			
		in-rush	VA	30
		holding	VA	4
<hr/>				
	of 50/60Hz coil powered at 60Hz			
		in-rush	VA	25
		holding	VA	3
<hr/>				
	of 60Hz coil powered at 60Hz			
		in-rush	VA	30
		holding	VA	4
<hr/>				
Dissipation at holding ≤20°C 50Hz			W	0.95
DC coil operating				
DC rated control voltage				
		min	V	6
		max	V	480
<hr/>				
Average coil consumption ≤20°C				
		in-rush	W	3.2
		holding	W	3.2
<hr/>				
Max cycles frequency				
Mechanical operations				cycles/h 3600
Operating times				
Average time for Us control				
	in AC			
	Closing NO	min	ms	12
		max	ms	21
	Opening NO	min	ms	9
		max	ms	18
	Closing NC	min	ms	17
		max	ms	26
	Opening NC	min	ms	7
		max	ms	17
<hr/>				
	in DC			
	Closing NO	min	ms	18

Opening NO	max	ms	25
	min	ms	2
Closing NC	max	ms	3
	min	ms	3
Opening NC	max	ms	5
	min	ms	11
	max	ms	17

UL technical data

Full-load current (FLA) for three-phase AC motor

at 480V	A	7.6
at 600V	A	6.1

Yielded mechanical performance

for single-phase AC motor

110/120V	hp	0.5
230V	hp	1.5

for three-phase AC motor

200/208V	hp	2
220/230V	hp	3
460/480V	hp	5
575/600V	hp	5

Contact rating of auxiliary contacts according to UL

A600 - Q600

General USE

Contactor

AC current	A	20
------------	---	----

Ambient conditions

Temperature

Operating temperature

min	°C	-40
max	°C	60

Storage temperature

min	°C	-55
max	°C	70

Max altitude


m 3000

Resistance & Protection

Pollution degree

3

Dimensions

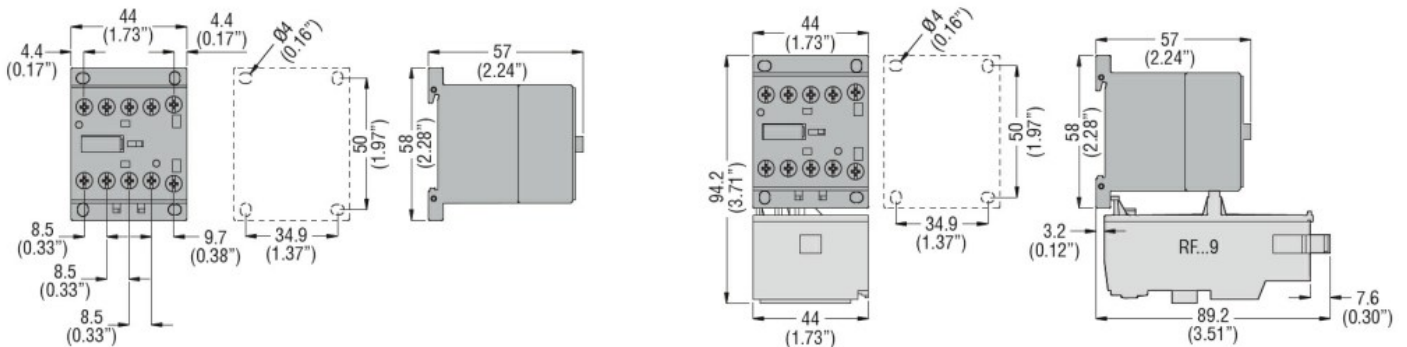

Wiring diagrams